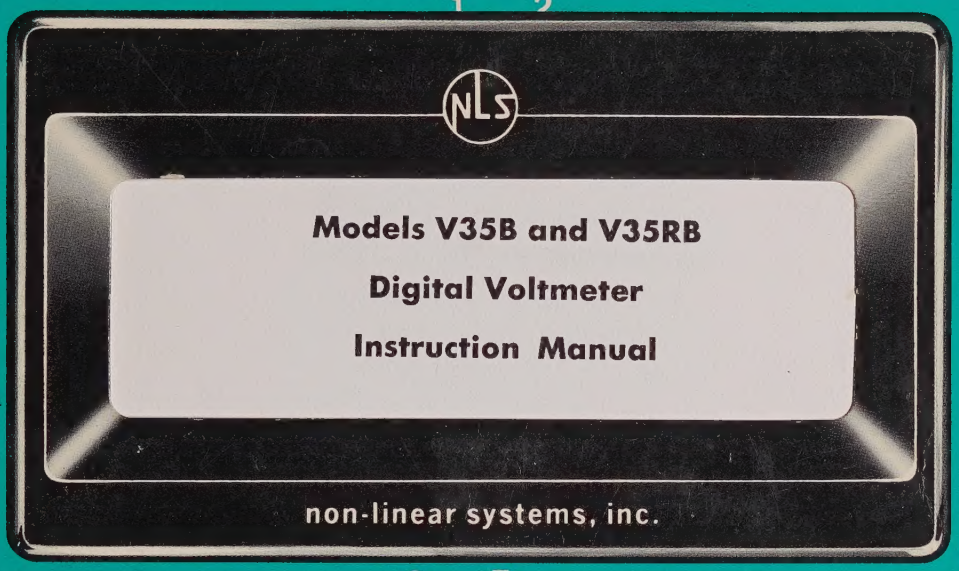

non | linear
systems, inc.

DEL MAR, CALIFORNIA

Models V35B and V35RB
Digital Voltmeter
Instruction Manual

Part 2

Notes:

1. The V35B Digital Voltmeter Instruction Manual is in two parts. Part 1, supplied in the front cover envelope of Part 2, contains text relating to the figures, tables, schematics and parts list data of Part 2.
2. The *Appendix* contains additional V35RB information.

This manual is for instrument Serial No._____

Non-Linear Systems, Inc.
Del Mar, California

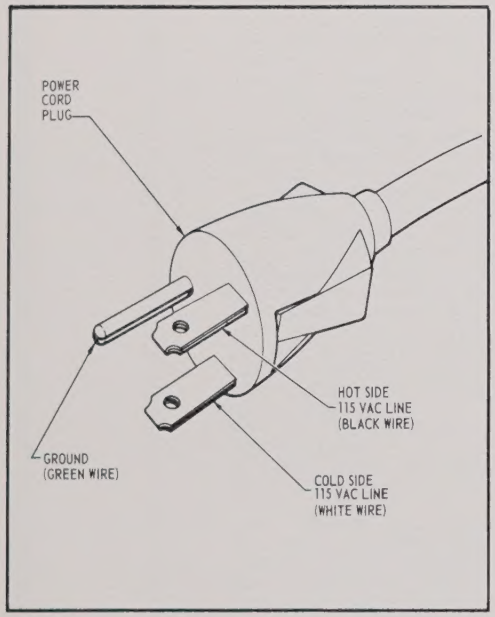

Figure 1. Power Plug Pin Coding.

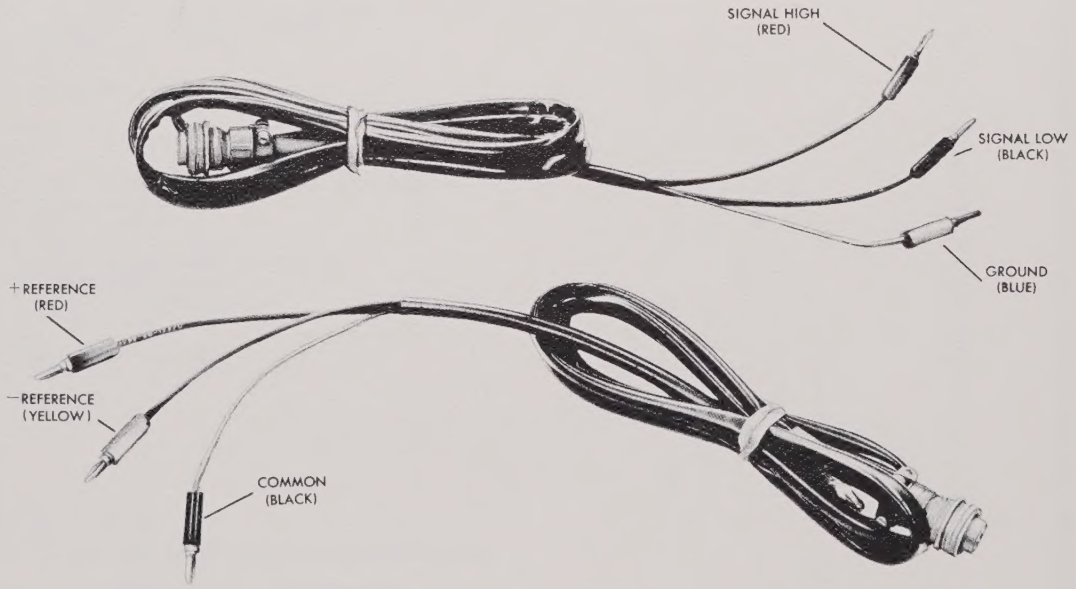

Figure 2. V35B Cables. Top: Signal Input. Bottom: External Reference Supply.

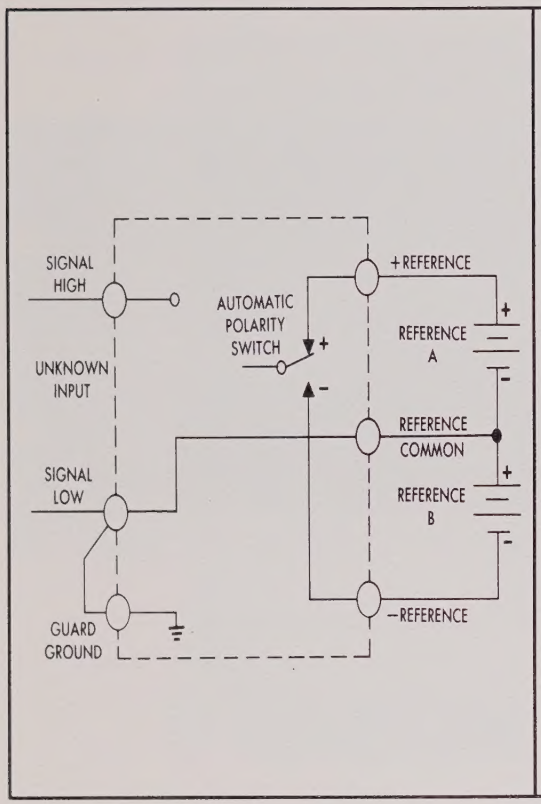

Figure 3. External Reference Supply Connection . . . To Measure Positive and Negative Input Voltages.

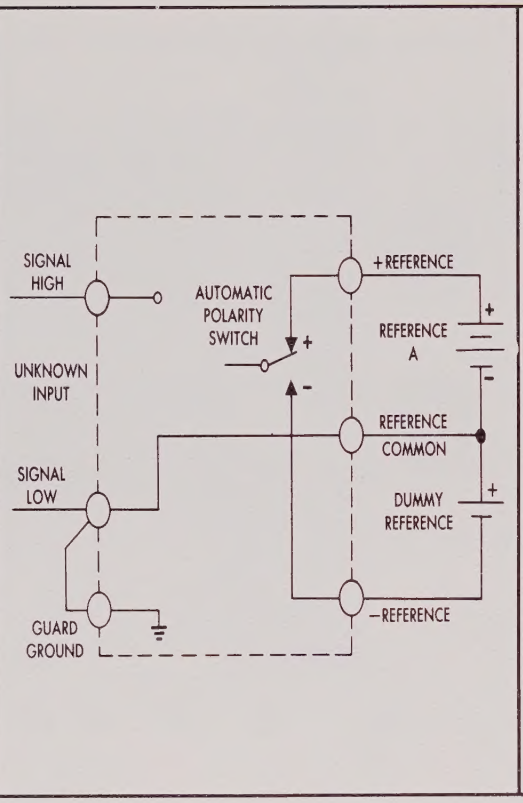

Figure 4. External Reference Supply Connection . . . To Measure Input Voltages of a Single Circuit.

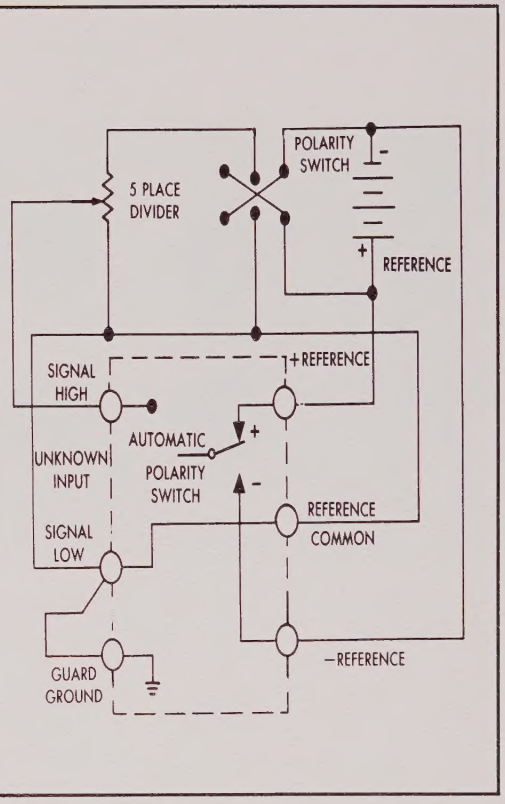

Figure 5. Ratiometer Linearity Test Circuit.

Figure 6. Front Panel Controls.

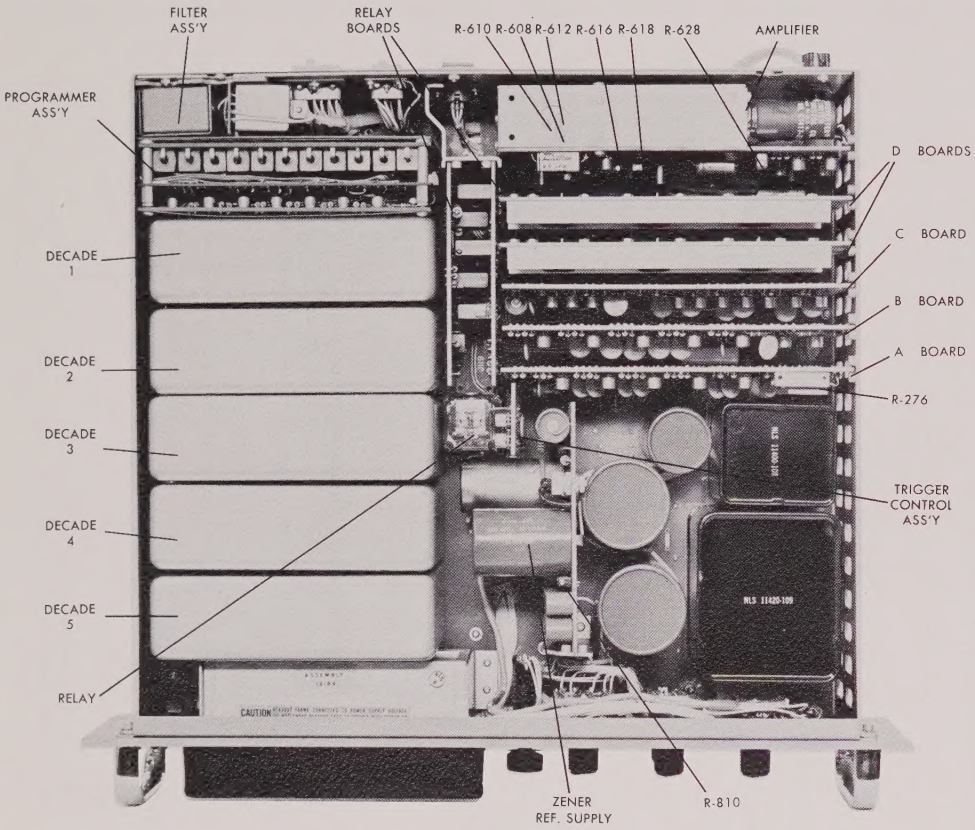

Figure 7. Calibration Adjustment Points and Plug-in Component Identification.

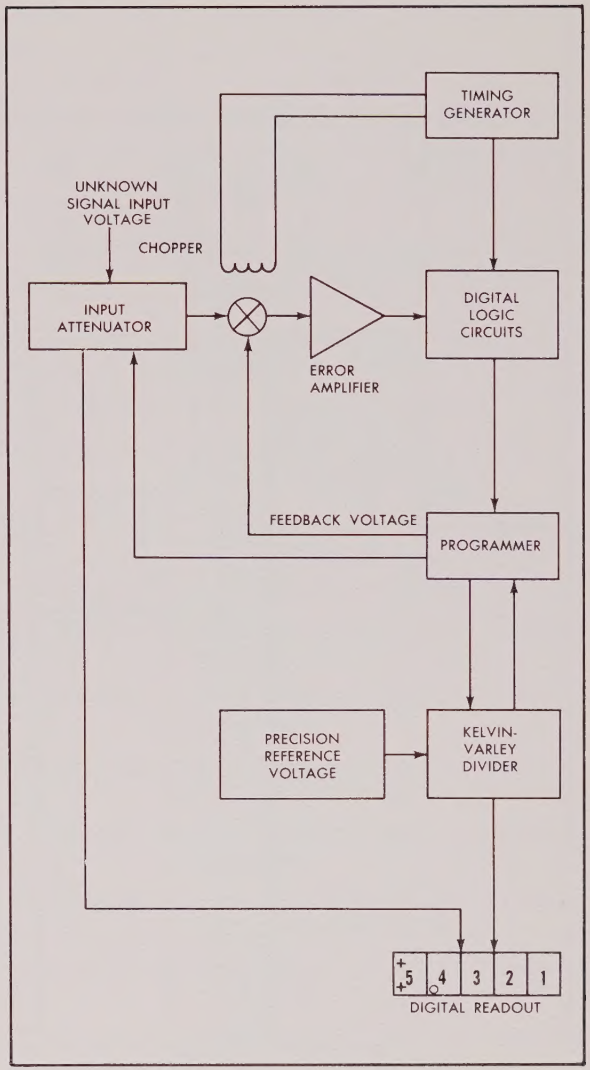

Figure 8. Block Diagram of V35B.

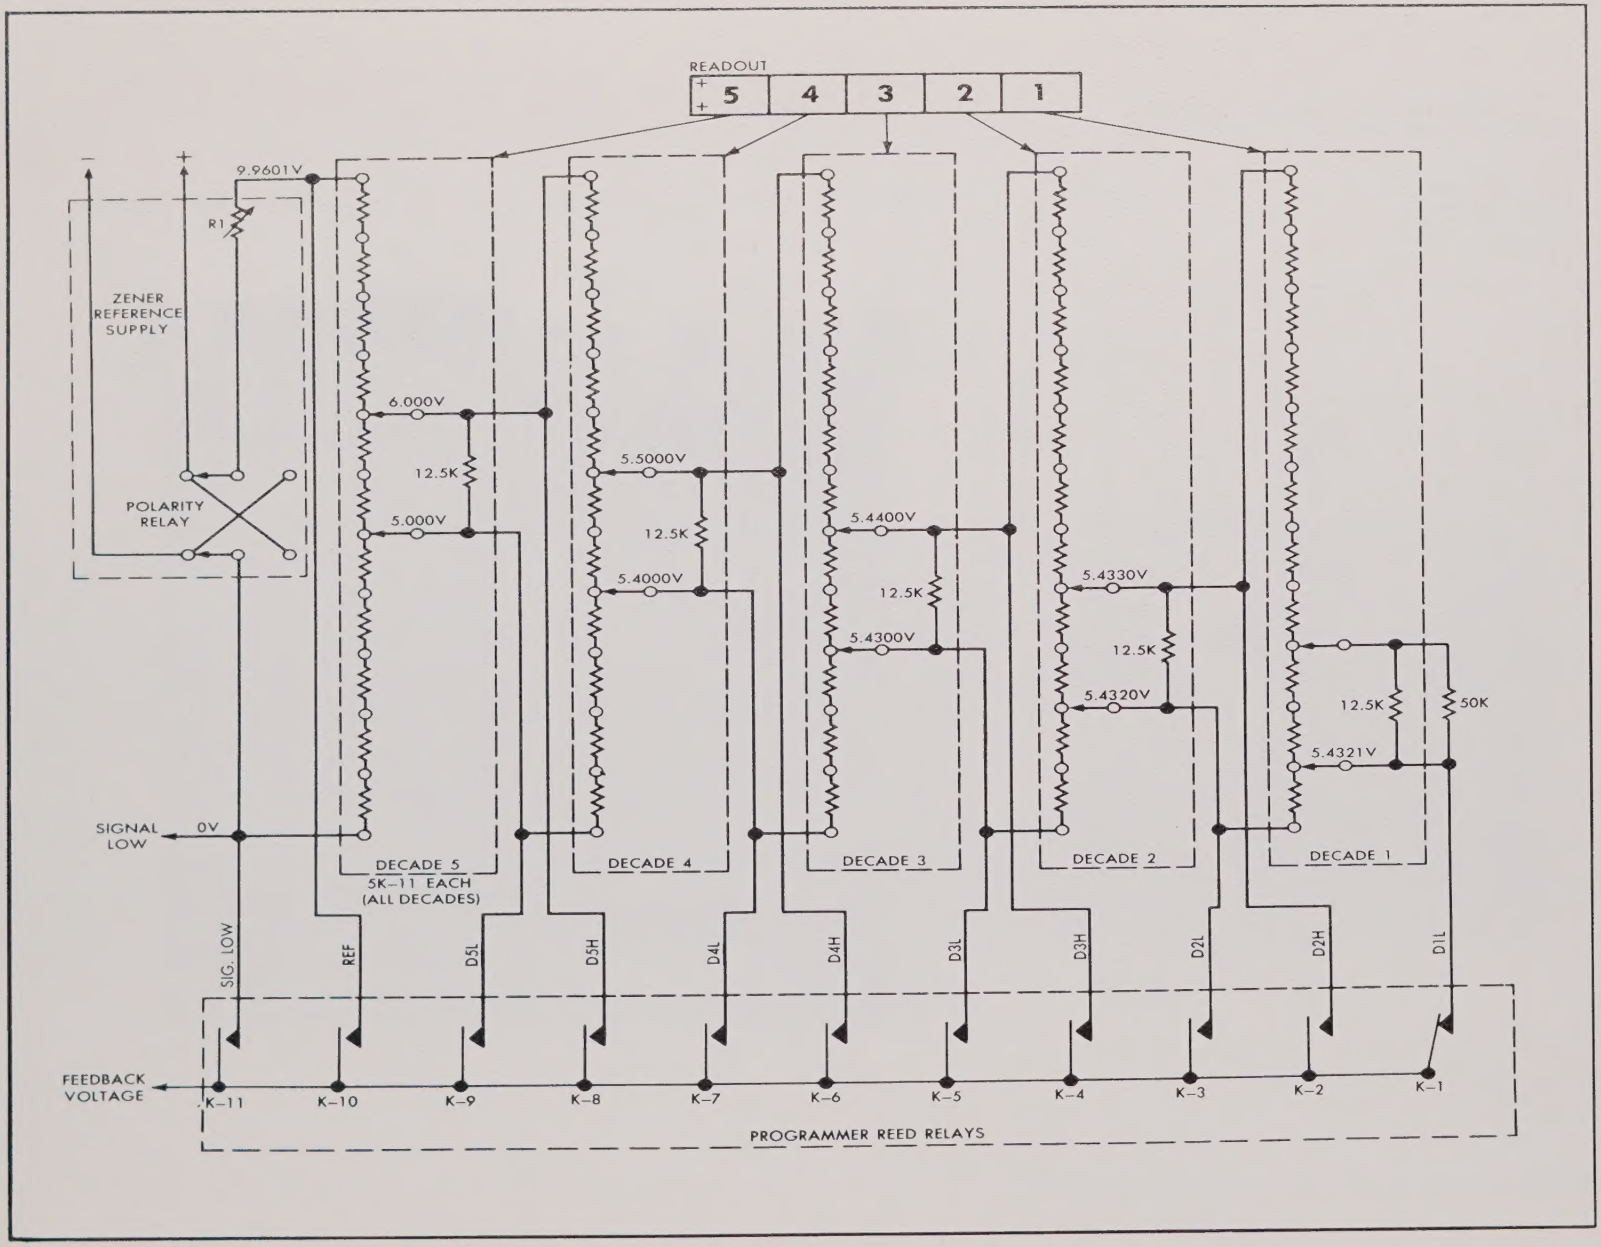

Figure 9. Stepping Switch, Kelvin-Varley Divider, and Relay Portion of the Programmer.

COUNTER POSITION	FEEDBACK	LOW-HIGH FLIP-FLOP	ERROR	FORWARD FLIP-FLOP	BACKWARD FLIP-FLOP	READOUT SIGNALS ZEROS	READOUT SIGNALS NINES	OUTPUT	NOTES
6	Ref. Low	LH	(−)	—	—	—	—	△P	Upon receipt of △P, the polarity is reversed & (−) becomes (+) + (0).
*6	Ref. Low	LH	(+) + (0)	F	$\overline{B}$	$\overline{D_5 0}$	—	Decade 5	Inhibits the turn-around signal to the "F" Flip-Flop and steps Decade 5 to Zero.
6	Ref. High	$\overline{LH}$	(+) + (0)	—	—	—	—	△Q	One △Q per bit is provided until (−) error is obtained.
*5	Dec. 5 Low	LH	(+) + (0)	F	$\overline{B}$	$\overline{D_4 0}$	—	Decade 4	Steps Decade 4 to Zero.
5	Dec. 5 Low	LH	(−)	—	B	$\overline{D_5 0}$	—	Decade 5	Steps Decade 5 until (+) + (0) error is obtained (to Zero).
5	Dec. 5 High	$\overline{LH}$	(+) + (0)	—	B	—	$\overline{D_5 9}$	Decade 5	Steps Decade 5 until (−) error is obtained.
*4	Dec. 4 Low	LH	(+) + (0)	F	$\overline{B}$	$\overline{D_3 0}$	—	Decade 3	Steps Decade 3 to Zero.
4	Dec. 4 Low	LH	(−)	—	B	$\overline{D_4 0}$	—	Decade 4	Steps Decade 4 until (+) + (0) error is obtained (to Zero).
4	Dec. 4 High	$\overline{LH}$	(+) + (0)	—	B	—	$\overline{D_4 9}$	Decade 4	Steps Decade 4 until (−) error is obtained.
3	Dec. 3 Low	LH	(−)	—	B	$\overline{D_3 0}$	—	Decade 3	Steps Decade 3 until (+) + (0) error is obtained (to Zero).
3	Dec. 3 High	LH	(+) + (0)	—	B	—	$\overline{D_3 9}$	Decade 3	Steps Decade 3 until (−) error is obtained.
2	Dec. 2 Low	LH	(−)	—	B	$\overline{D_2 0}$	—	Decade 2	Steps Decade 2 until (+) + (0) error is obtained (to Zero).
2	Dec. 2 High	$\overline{LH}$	(+) + (0)	—	B	—	$\overline{D_2 9}$	Decade 2	Steps Decade 2 until (−) error is obtained.
1	Dec. 1 Low	LH	(−)	—	B	$\overline{D_1 0}$	—	Decade 1	Steps Decade 1 until (+) error is obtained (to Zero).
1	Dec. 1 Low	$\overline{LH}$	(+)	—	B	—	$\overline{D_1 9}$	Decade 1	Steps Decade 1 until error is not (+).

Figure 10. Tabular Presentation of V35B Logic.

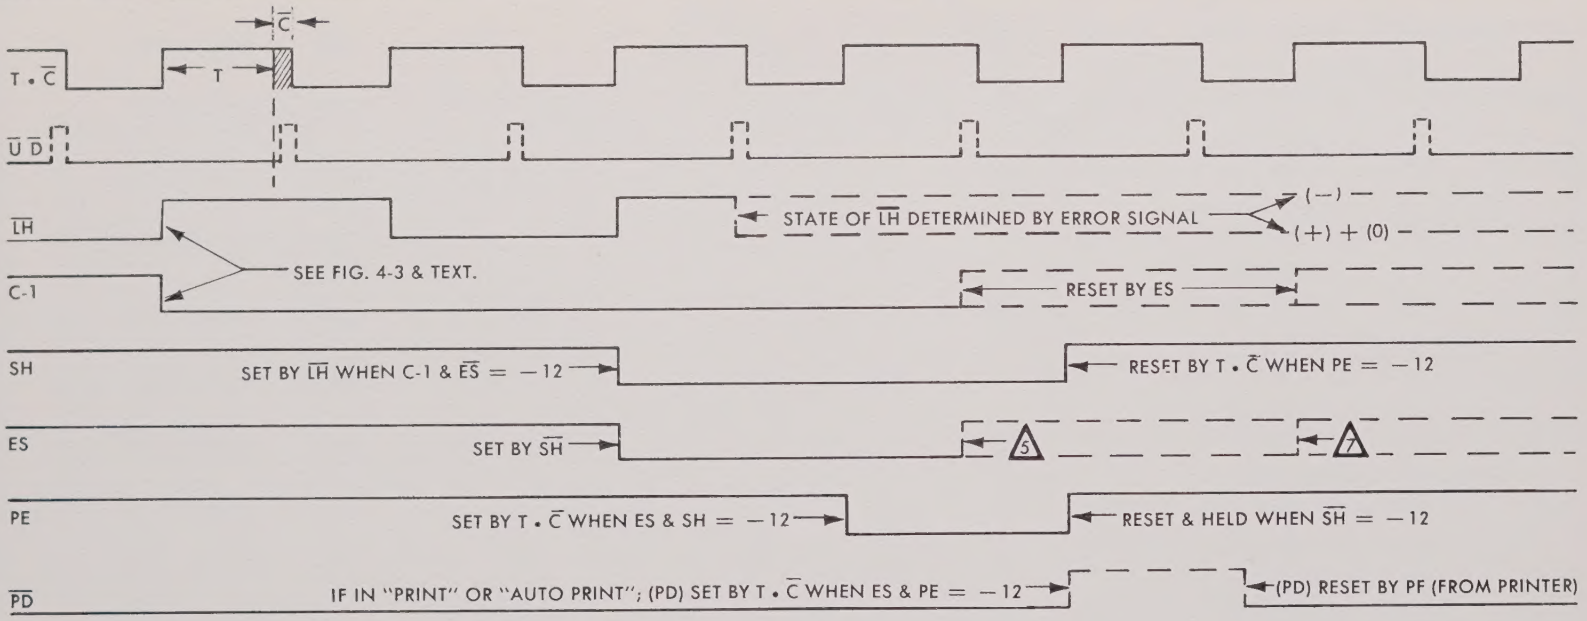
C̄
T • C̄
T
Ū D̄
LH
STATE OF LH DETERMINED BY ERROR SIGNAL
(−)
(+) + (0)
C-1
SEE FIG. 4-3 & TEXT.
RESET BY ES
SH
SET BY LH WHEN C-1 & ES = −12
RESET BY T • C̄ WHEN PE = −12
ES
SET BY SH
5
7
PE
SET BY T • C̄ WHEN ES & SH = −12
RESET & HELD WHEN SH = −12
PD
IF IN "PRINT" OR "AUTO PRINT"; (PD) SET BY T • C̄ WHEN ES & PE = −12
(PD) RESET BY PF (FROM PRINTER)

NOTES:

1. "SET" OR RESET OCCURS WHEN INDICATED TERM GOES FROM −12 TO 0 VOLTS, EXCEPT AS NOTED.
2. PD IS HELD IN THE RESET CONDITION WHEN NOT IN "PRINT" OR "AUTO PRINT".
3. ES IS HELD IN THE SET CONDITION WHEN PD = −12 (SET).
4. SOLID LINES INDICATE THAT EVENT ALWAYS OCCUR AT THE TIMES AND IN THE STATE SHOWN; — DASHED LINES INDICATE THAT TIMES AND/OR STATES ARE DEPENDENT ON SPECIFIED CONDITIONS.

5 IF IN "AUTO PRINT", ES WILL BE RESET BY Ū D̄ WHEN PE = −12, (IF Ū D̄ EXISTS).

6. IF ES RESET, PD CANNOT BE SET AND THE PRINT SIGNAL IS INHIBITED.

7 IF ES IS NOT RESET AT 5 IT WILL REMAIN SET UNTIL MS (TRIGGER CONTROL FF) IS SET (−12) AND THE FIRST T • C̄ (SEE NOTE 1) RESETS ES. THE MS FF IS NOT SHOWN ON THIS CHART SINCE THERE IS NO SPECIFIC TIMING RELATIONSHIP.

Figure 11. Chart: End of Scan, Print Timing, and Logic.

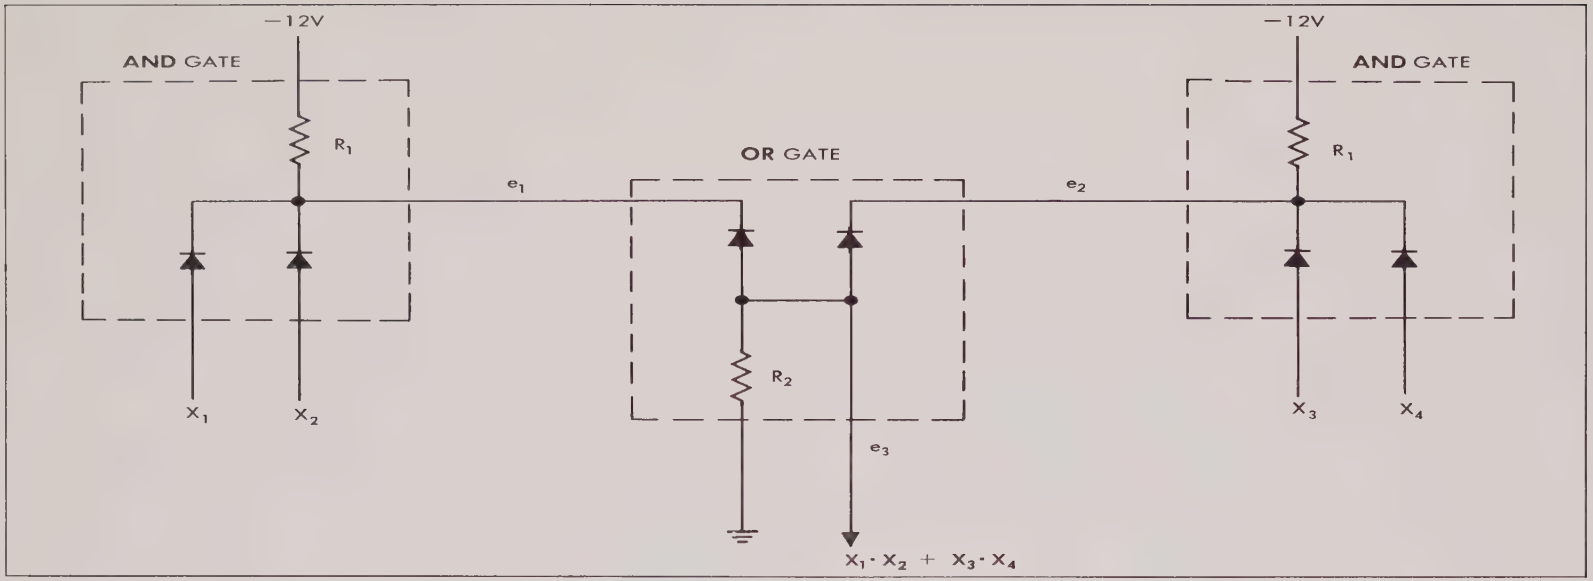

Figure 12. AND-OR Gates.

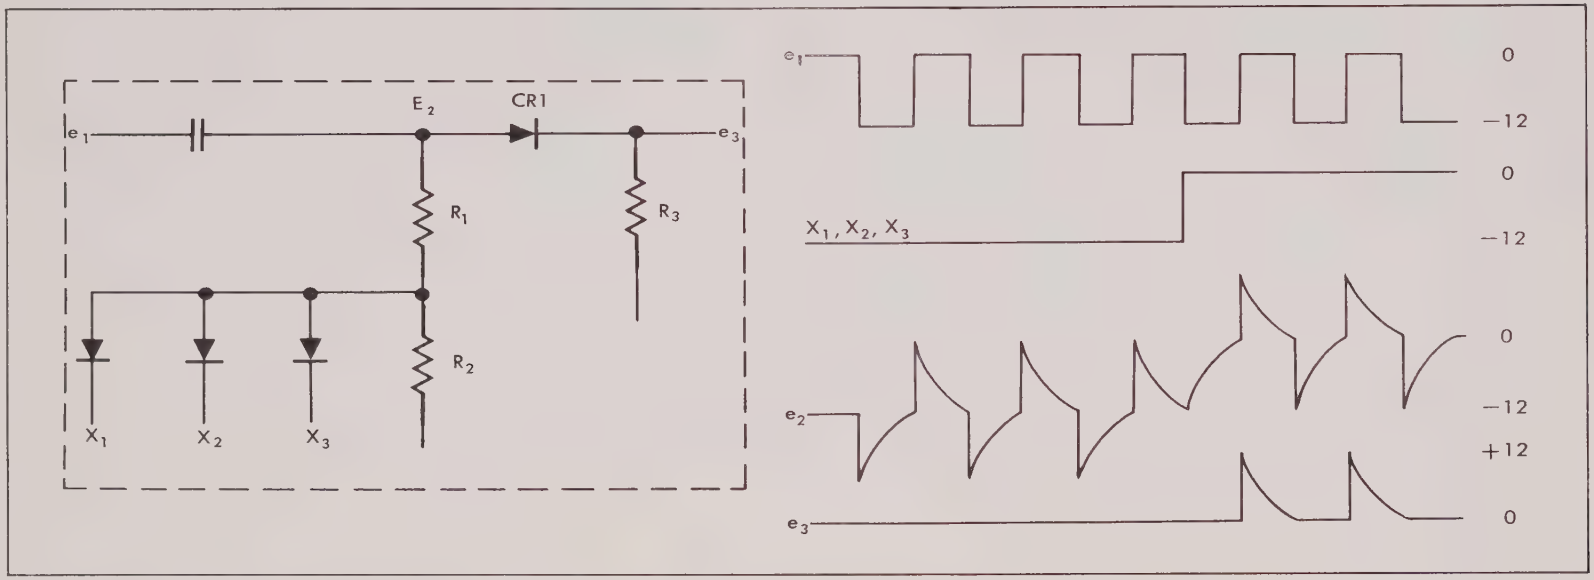

Figure 13. AC Coupled AND Gate.

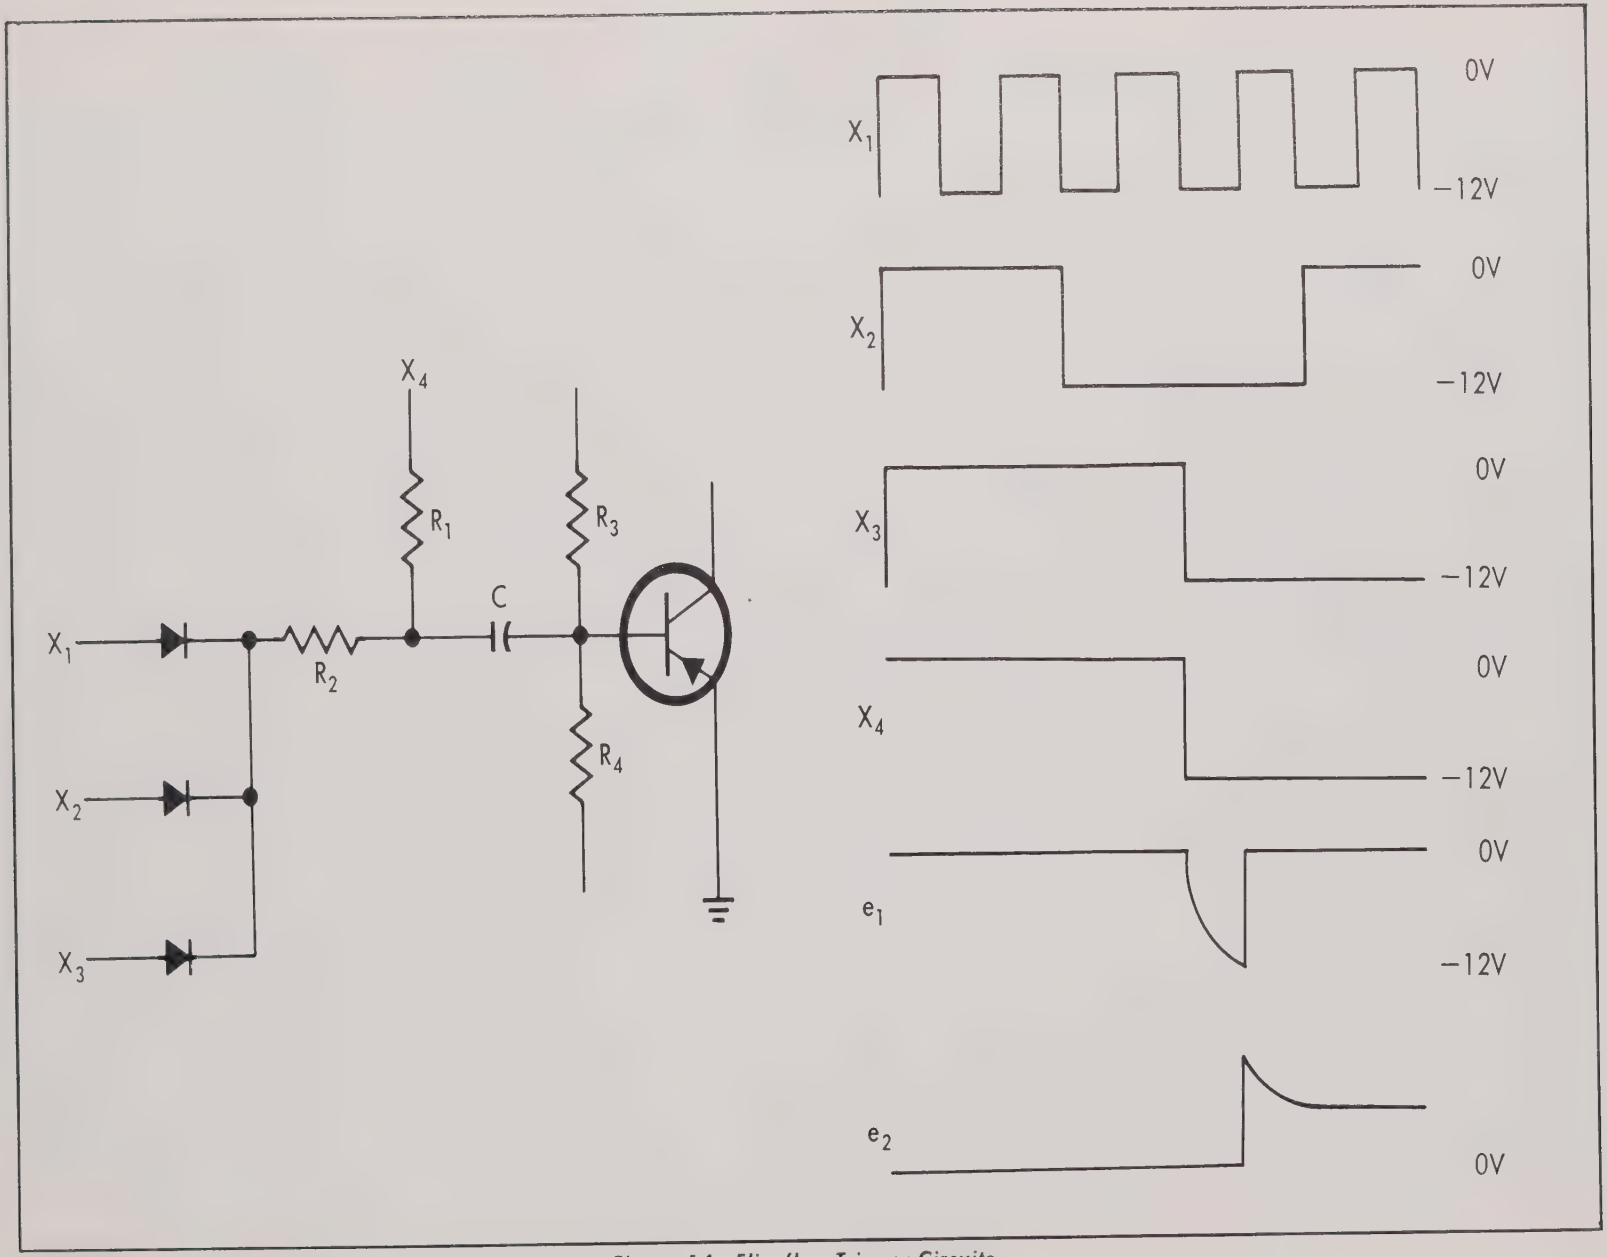

Figure 14. Flip-flop Trigger Circuits.

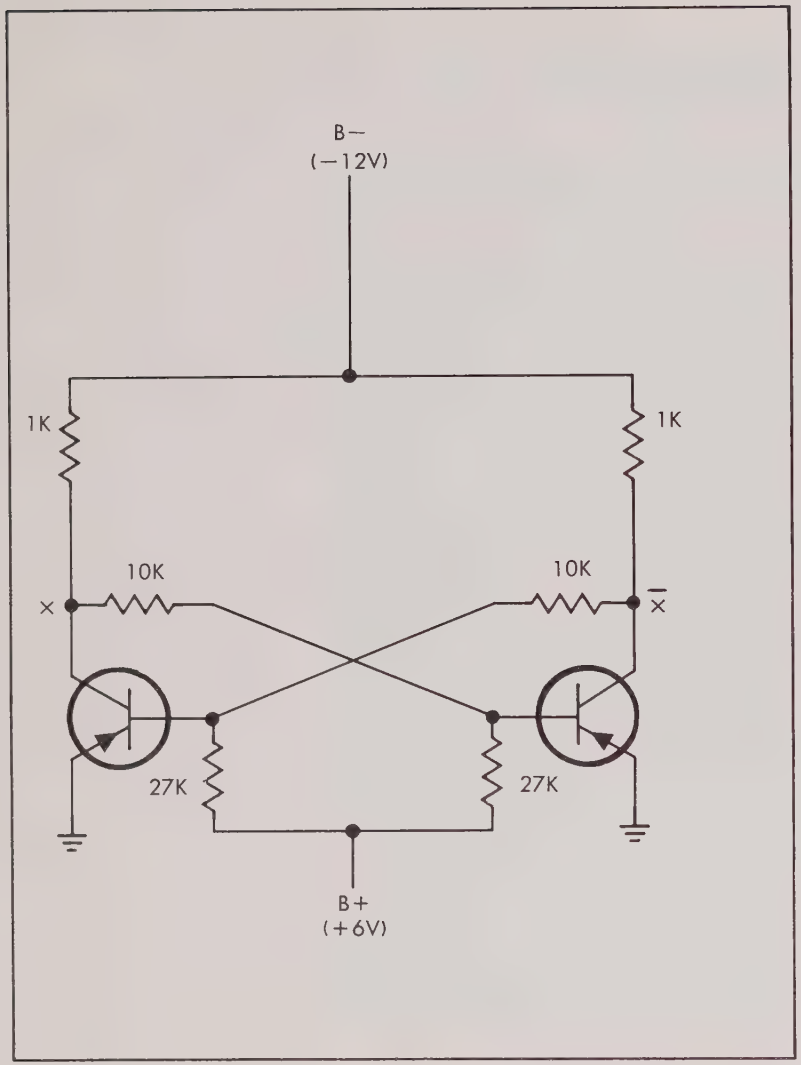

Figure 15. Flip-flop Only.

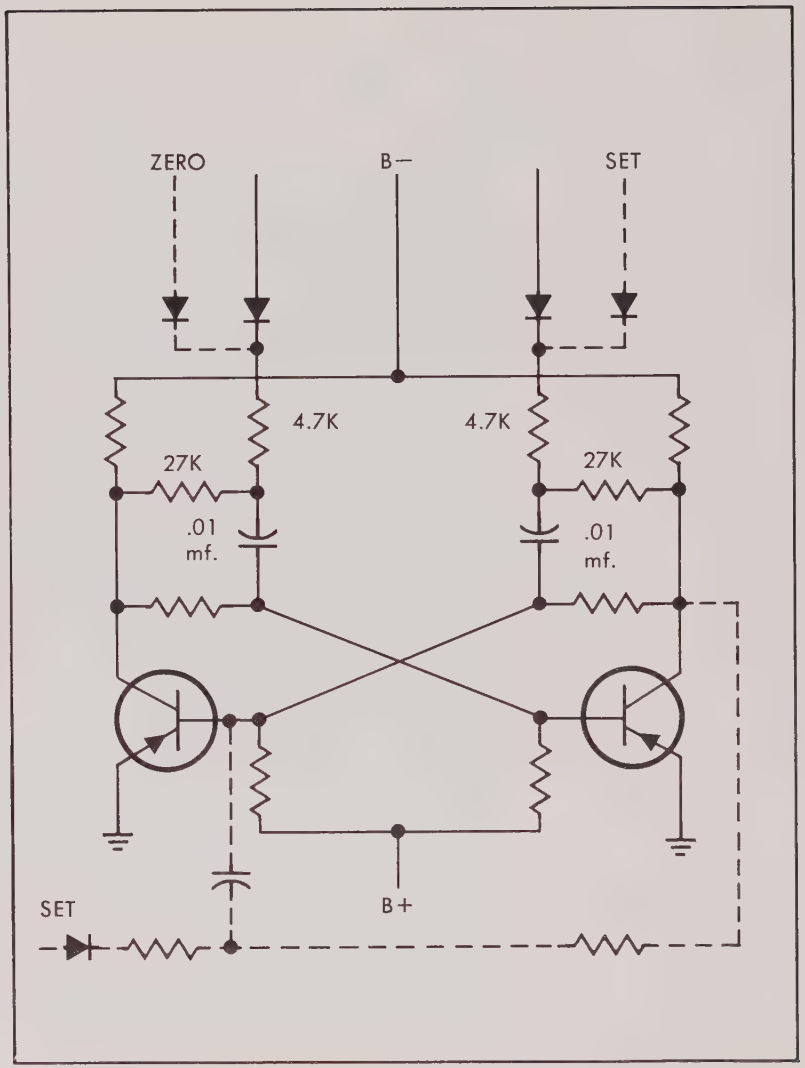

Figure 16. Flip-flop with Trigger.

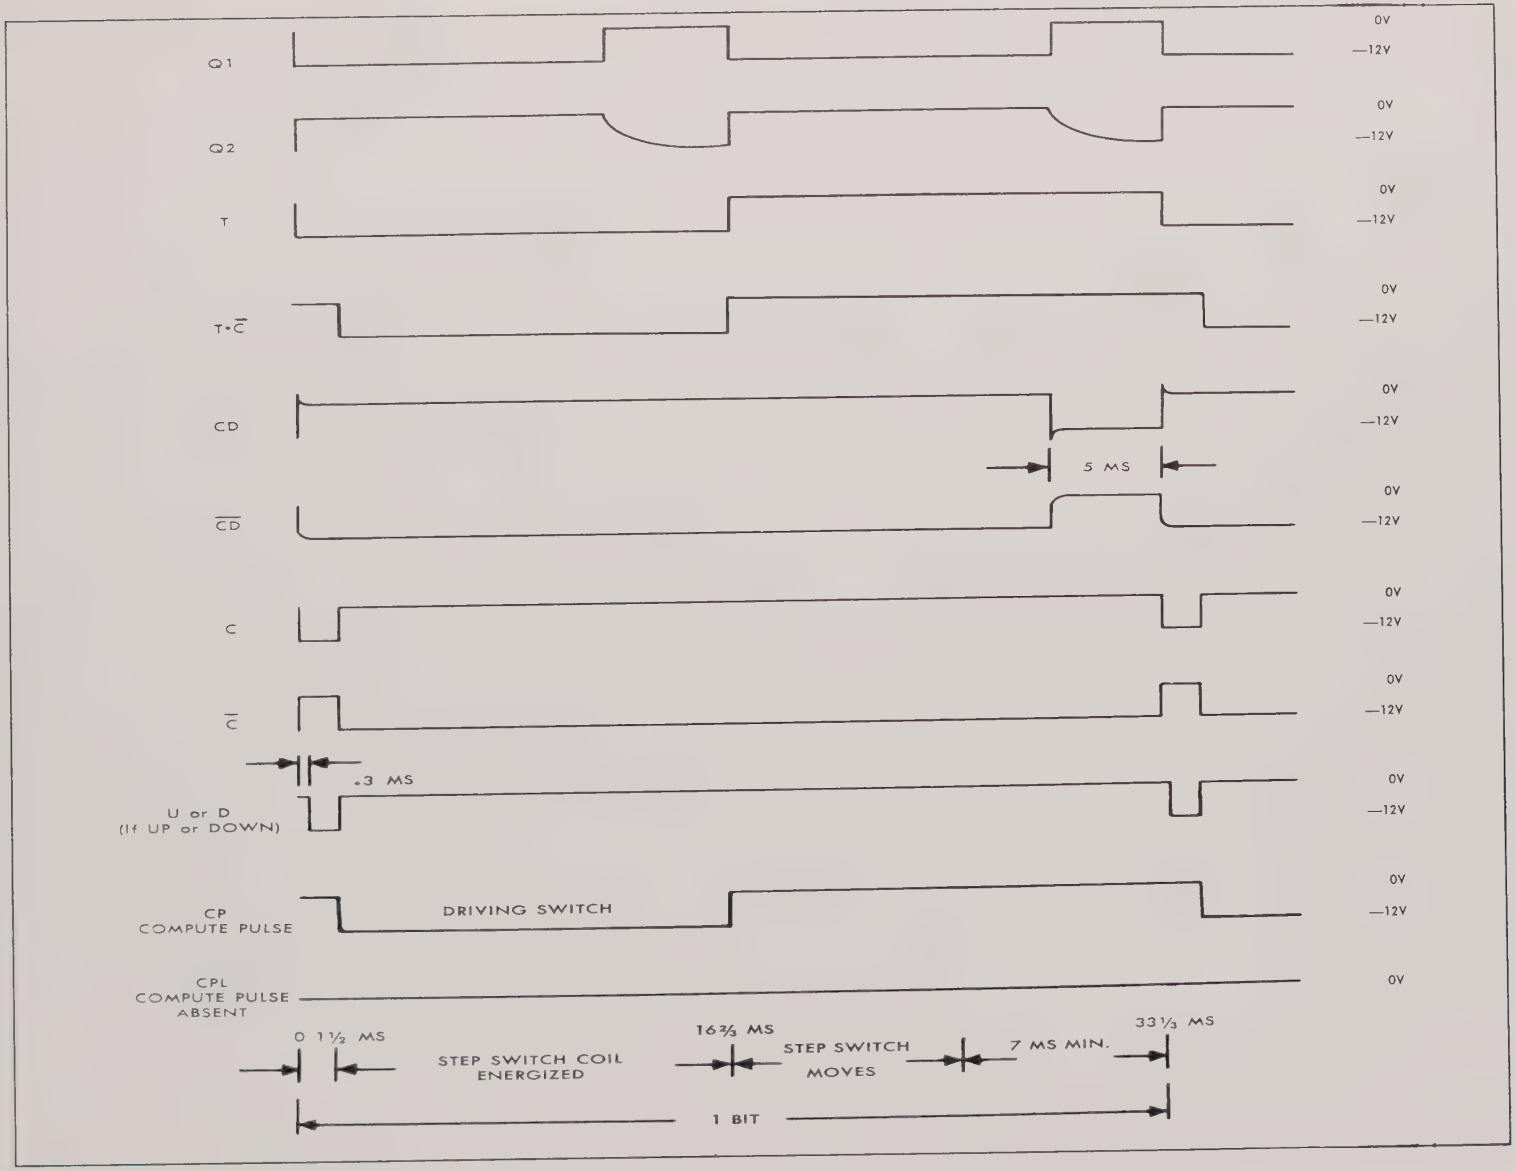

Figure 17. Chart: Timing.

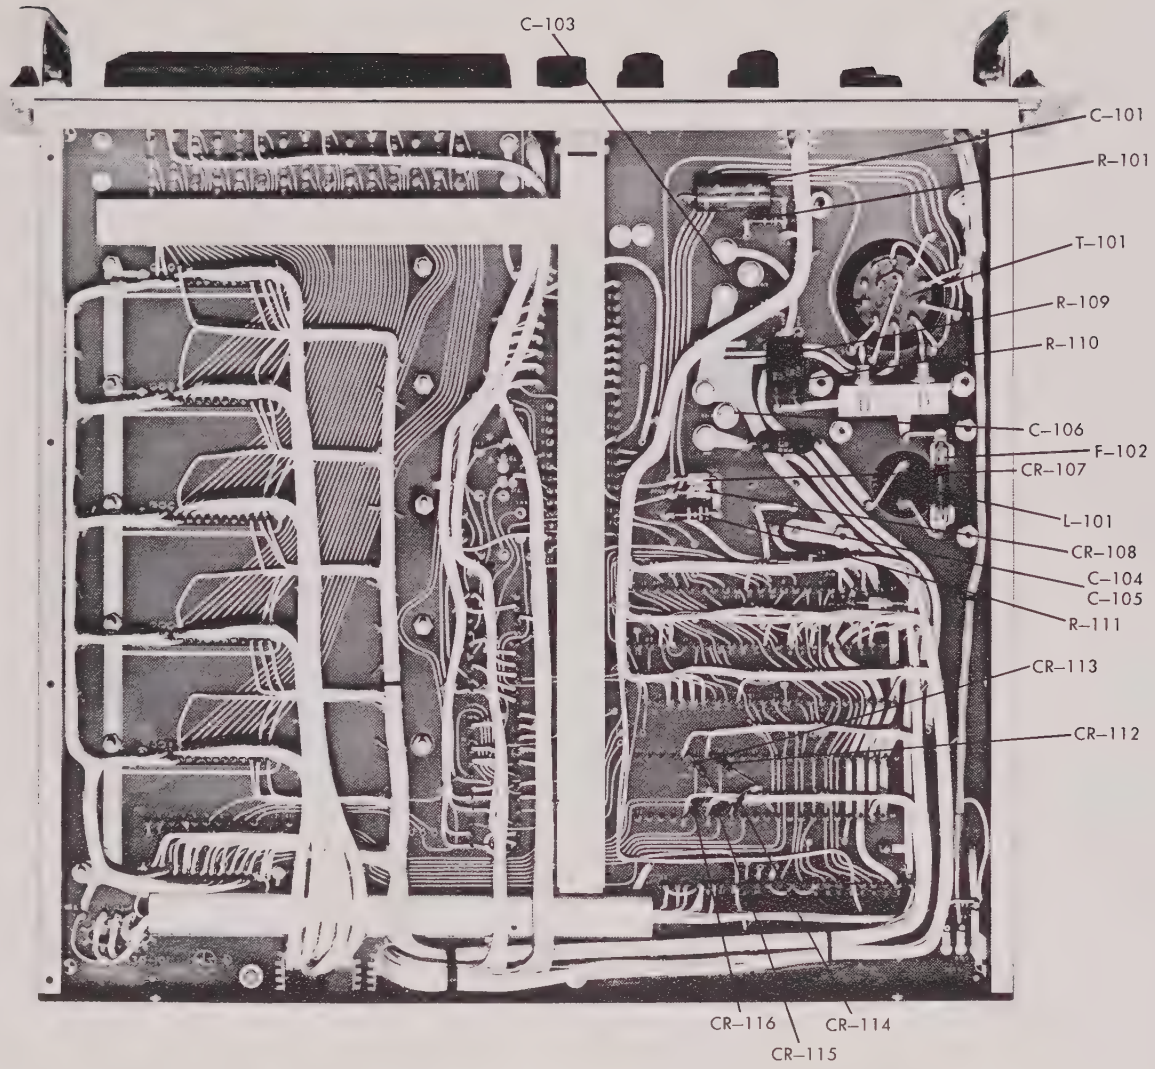

Figure 18. Digital Voltmeter, Bottom View.

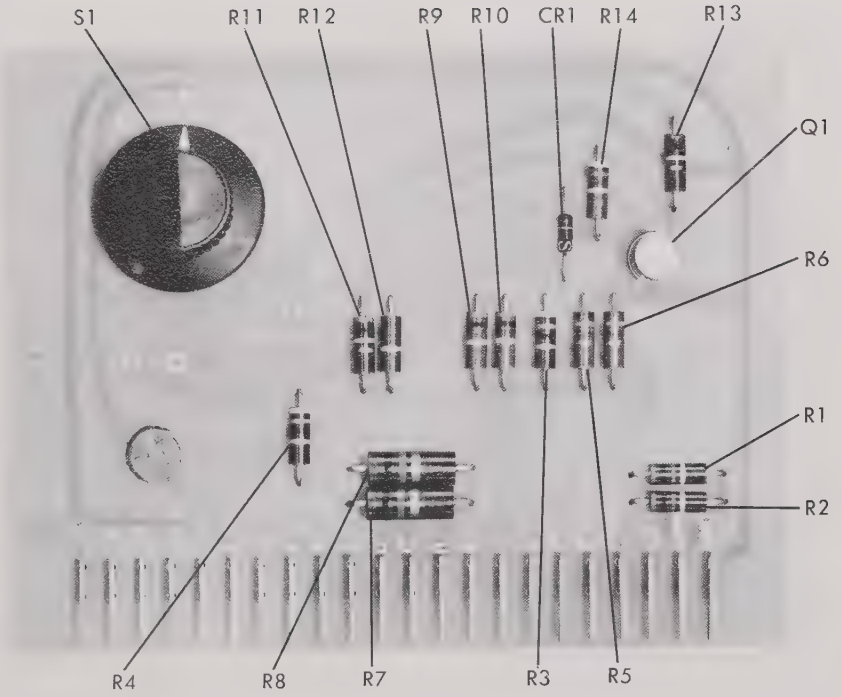

Figure 19. Dummy Amplifier Used to Simulate Error Amplifier.

Test No.	SWITCH POSITIONS			Special Instructions	Dummy Amplifier	FORWARD SCAN			Reverse Scan Completed (C–1)	NOTES:
	Range	Power	Mode			Start (C–1)	Intermediate	Finish (C–6)		
1	AUTO	ON	SS	GROUND $\overline{P}$	U	?	?	+xxxx.x		1. Set Function Switch to "DC", all tests.
2	AUTO	ON	—	GROUND $\overline{P}$	D				+0000.0	
3	AUTO	ON	SS	GROUND $\overline{P}$	D	+0000.0	NO CHANGE	+0.0000		
4	AUTO	ON	—	GROUND $\overline{P}$	$\overline{U}$ $\overline{D}$		NO CHANGE		+9.9990	
5	AUTO	ON	SS	GROUND $\overline{P}$	D	+9.9990	NO CHANGE	+9.9990		
6	AUTO	ON	—	GROUND $\overline{P}$	③ U		NO CHANGE		+9.9999	
7	AUTO	ON	SS	GROUND $\overline{P}$	U	+9.9999	NO CHANGE	+9999.9		
8	AUTO	ON	—	GROUND $\overline{P}$	D		NO CHANGE		+0000.0	
9	AUTO	ON	SS	CLEAR $\overline{P}$, GROUND P	U	−0000.0	NO CHANGE	−0.0000		
10	AUTO	ON	—	CLEAR $\overline{P}$, GROUND P	$\overline{U}$ $\overline{D}$		NO CHANGE		−9.9990	
11	AUTO	ON	SS	CLEAR $\overline{P}$, GROUND P	U	−9.9990	NO CHANGE	−9.9990		
12	AUTO	ON	—	CLEAR $\overline{P}$, GROUND P	③ D		NO CHANGE		−9.9999	
13	AUTO	ON	SS	CLEAR $\overline{P}$, GROUND P	D	−9.9999	NO CHANGE	−9999.9		
14	AUTO	ON	—	CLEAR $\overline{P}$, GROUND P	③ U				−0000.0	
15	AUTO	ON	SS	CLEAR P	D	−0000.0	−0.0000	−0000.0		
16	AUTO	ON	—		U				−0000.0	
17	AUTO	ON	SS		$\overline{U}$ $\overline{D}$	−0000.0	0.0000	0000.0		
18	AUTO	ON	—		U				−0000.0	
19	AUTO	ON	SS		U	−0000.0	−0.0000	+0000.0		
20	AUTO	ON	—		D				+0000.0	
21	AUTO	ON	SS		$\overline{U}$ $\overline{D}$	+0000.0	+0.0000	+0000.0		
22	AUTO	ON	—		D				+0000.0	
23	1000	ON	SS		U	+0000.0	NO CHANGE	+000.00		
24		ON	—		D		NO CHANGE		+000.00	
25	100	ON	SS		U	+000.00	NO CHANGE	+00.000		
26		ON	—		D		NO CHANGE		+00.000	
27	10	ON	SS		U	+00.000	NO CHANGE	+0.0000		
28	10	ON	—		D		NO CHANGE		+0.0000	
29	10	PRINT	SS		U	+0.0000	NO CHANGE	+0.0000		
30	10	PRINT	—		D		NO CHANGE		+0.0000	Print command issued
31	10	PRINT	SS, AUTO, CONT.	Try All Mode Switch Positions	U	N O S C A N				Instrument locked up at C-1 (end of scan)
32	10	ON,–THEN AUTO PRINT	SS		U	+0.0000	NO CHANGE	+0.0000		
33	10	ON,–THEN AUTO PRINT	—		⑤ D		NO CHANGE		+0.0000	No print com. issued
34	10	ON,–THEN AUTO PRINT	—		⑤ D	+0.0000	NO CHANGE	−0.0000		Counter will stay at C-6 until "U" is applied
35	10	ON,–THEN AUTO PRINT	—		⑤ U		NO CHANGE		−0.0000	No print com. issued
36	10	ON,–THEN AUTO PRINT	—		⑤ U	−0.0000	NO CHANGE	+0.0000		Counter will stay at C-6 until "D" is applied
37	10	ON,–THEN AUTO PRINT	—		③ D THEN $\overline{U}$ $\overline{D}$		NO CHANGE		+0.0000	Print command issued
38	10	ON,–THEN AUTO PRINT	SS, AUTO, CONT.	Try All Mode Switch Positions		N O S C A N				Instrument locked up at C-1 (end of scan)
39	10	ON	St'dby, Then Note ④		NOTE ④	?	?	?	?	

2. SS = Single Scan; always complete ALL other indicated settings before operating SS.
③ Switch dummy rapidly from previous to indicated position.
④ With dummy amp. (DA) at U D, set mode switch (MS) to auto; no scan should occur. When DA is set to U or D, a scan to C-6 should result. Return MS to st'by and set DA to the opposite position (U or D as req'd); a reverse scan to C-1 should result. With DA at UD, set MS to Cont., a scan to C-6 should result.
⑤ These lines (2) show the complete cycle initiated by the indicated error pulse. This pulse starts the Rev. scan (from C-6 to C-1) and the presence of the error pulse at ES automatically recycles the Fw'd scan to C-6.

Figure 20. Dummy Amplifier Test Procedure.

TEST NO.		SYMPTOM	COUNTER CONDITIONS	PROBABLE AREA OF TROUBLE	LOCALIZING HINTS & INSTRUCTIONS
1.		Faulty Fwd. Scan	Not at C-1 and not at C-6 initially, or more than one output	11430-731	If more than one counter output is true (C-1 thru C-6) at a time, the fault lies in one of the FF's concerned, or in their drive matrix. With C-1 grounded, approx 6V should be measured across CR-3.
			Stops Before C-6		
			At C-6 initially	11430-731 or 11430-300	CR-28 or associated circuitry on 11430-731 or connections to 11430-300. ES not true; defective ES FF on 11430-300.
			Remains at C-1	11430-731, 11430-300, or 11430-860	Circuits associated with the forward drive line (11430-731), connections to 11430-300; faulty ES, PD or F FF. Proceed to Test No. 39, check pin 10 of 11430-860 for trigger pulse called for by the mode switch position.
2.	a	Faulty Rev. Scan	Remains at C-6	11430-731	Circuits associated with the rev. drive line including gate components, Q-13, C-13, CR-23, CR-25, CR-26, C-12, etc.
				11430-300	LH FF or its triggers, B FF, pin 10 (M-2) should be false, defective turn-around gate (CR's 29, 30, 31, 32, 33 & 36).
				11430-200	(—) FF or CP invert-amp (Q-1 & Q-2).
				11420-500 (Two Boards)	Any fault in any of the 5 amplifiers that would cause the D_1C thru D_5C outputs to be at GND.
	b	Polarity Not +	Reverse to C-1	11420-400	Defective P FF.
				11420-800	K-4 defective.
	c	Decade Runs Continuously	Reverse Scan Will Stop at Faulty Decade	11430-734	"Zero" lamp diode, associated with the decade in question, or wiring is faulty. Example: CR-78 for Decade 5.
	d	One Decade Fails to Run	Reverse to C-1, Scans by Faulty	11430-734	Affected decade drive signal at ground. Example: D_5S may be shorted to GND or open; check CR-80, R-6, R-30 and associated circuitry.
			Decade Without	11420-500	Faulty power amplifier or associated wiring.
			Stopping to Compute	11420-700	Faulty decade or main board connector or wiring.
	e	All Decades Fail to Run	Reverse to C-1	11430-734	No B— to pulling resistors, R-1, R-3, R-5, R-8, R-9 etc.; or (—), LH, or B may be permanently shorted to GND.
				11(5)(4)30-100	No —15V to D board or decades.
3.		Decimal Incorrect	Reverse to C-1	11430-734	Q-3, Q-4 FF not set; check FF and trigger circuitry. Also check Q-1 & Q-2 inverters and associated circuitry.
9				11420-800	K-1 and/or K-3, and associated circuitry.
				11420-400	Defective Q and/or R FF, and associated circuitry.
4.	a	Same as 2a	Same as 2a	Same as 2a	Same as test 2a.
	b	Same as 2	Same as 2c	Same as 2c	Same as 2c except nine lamp diodes are involved.

TEST NO.		SYMPTOM	COUNTER CONDITIONS	PROBABLE AREA OF TROUBLE	LOCALIZING HINTS & INSTRUCTIONS
10	c	Same as 2d	Same as 2d	Same as 2d	Same as 2d
	d	Same as 2e	Same as 2e	Same as 2e	Same as 2e
	e	1st Decade Not Zero	Reverse to C-1	11430-734	(+) + (0) diode (CR-48) or associated wiring.
6.	a	1st Decade Still Zero	Reverse to C-1	11430-734	CR-42, CR-43, CR-44, CR-48 grounded or R-22 open (or assoc. circuitry).
12	b	1st Decade Runs Continuously	Reverse to C-1	11430-734	CR-42 or associated wiring open.
7.		Decimal Incorrect	C-6	11420-400	Defective Q and/or R FF or associated circuitry.
13				11420-800	K-1 and/or K-3 or associated circuitry.
				11430-734	CR-87, C-2, CR-28, R-7 or associated circuitry.
8. 14		Decimal Incorrect (Returned to Test No. 6 Indication)	Reverse to C-1	11430-734	Collector of Q-4 should have gone to ground at C-6, test 6. If not, check C-1, Q-3, Q-4 & associated circuitry. Also check CR-83.
23.		Decimal Incorrect		11420-800	K-1 and/or K-3 or associated circuitry.
				11420-400	CR-6, CR-18 or associated circuitry.
25.		Same as 23		Same as 23	Same as 23 except CR-5 & CR-14.
27.		Same as 23		Same as 23	Same as 23 except CR-4.
30.		No Print Command		11430-300	SH not set, PE not set, PD not set, in that order at end of scan; see Fig. 11. Check circuitry associated with these FF's.
37				11420-400	PC mono stable not firing; check Q-1, Q-2, CR-1 & associated circuitry.
31. 38		Instrument Scans		11430-300	PD has been reset; check associated circuitry to determine what is reseting PD. CR-44 defective.
33.		Print Command Issued		11430-300	Same as 30; also check CR-43 & associated circuitry. Check for C pulse at pin 1; if absent, check wiring thru print-power switch, S-104.
35				11(4)(5)30-100	Check wiring thru print-power switch, S-104.
39.		No Scan in One or More Modes		11430-860	Check Q-1 & Q-2 and associated circuitry.
				11(4)(5)30-100	Check wiring thru mode switch, S-103.

NOTES:
1. If there is a failure at any test no., check to see that the indicated dummy amplifier error produces the correct error signal at J-103, namely: for + Pol; U = (+) and (+) + (0), $\overline{U}$ $\overline{D}$ = (+) + (0) and D = (−). For −Pol; U = (−), $\overline{U}$ $\overline{D}$ = (+) + (0) and D = (+) and (+) + (0).
2. Instructions for any specific test no. assume that all previous tests were OK.
3. If Test No's. are omitted, the test has been performed previously, as: steps 15 thru 22 confirm the results of previous steps.
4. The term "Associated Circuitry" means components, etched circuits, connectors and chassis wiring; probability of trouble area is in the order listed.
5. Symptoms, probable area of trouble and instructions are the same for step no's. in 9 and step no's. in 3 on the same line.

Figure 21. Troubleshooting with Dummy Amplifier.

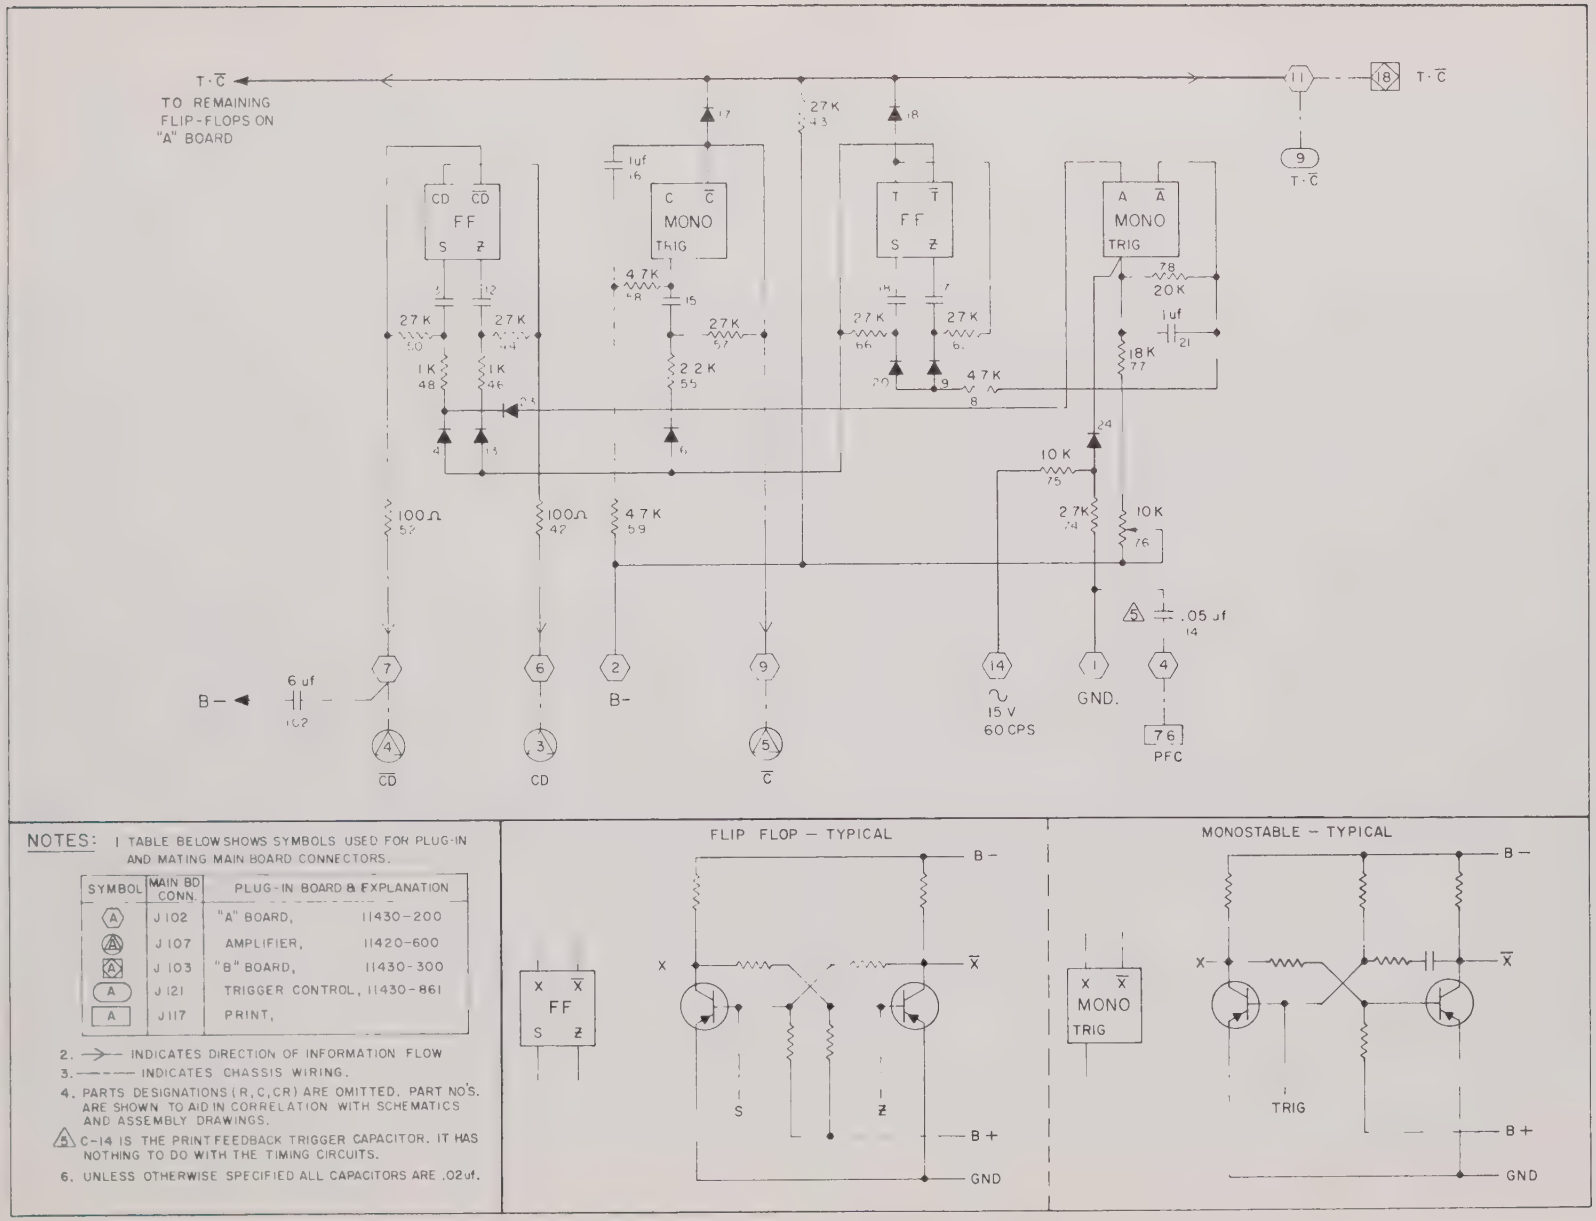

NOTES: 1 TABLE BELOW SHOWS SYMBOLS USED FOR PLUG-IN AND MATING MAIN BOARD CONNECTORS.

SYMBOL	MAIN BD CONN.	PLUG-IN BOARD & EXPLANATION
(A)	J 102	"A" BOARD, 11430-200
(A)	J 107	AMPLIFIER, 11420-600
(A)	J 103	"B" BOARD, 11430-300
A	J 121	TRIGGER CONTROL, 11430-861
A	J 117	PRINT,

2. → INDICATES DIRECTION OF INFORMATION FLOW
3. ——— INDICATES CHASSIS WIRING.
4. PARTS DESIGNATIONS (R,C,CR) ARE OMITTED. PART NO'S. ARE SHOWN TO AID IN CORRELATION WITH SCHEMATICS AND ASSEMBLY DRAWINGS.
5. C-14 IS THE PRINT FEEDBACK TRIGGER CAPACITOR. IT HAS NOTHING TO DO WITH THE TIMING CIRCUITS.
6. UNLESS OTHERWISE SPECIFIED ALL CAPACITORS ARE .02uf.

Figure 22. Simplified Schematic & Logic Diagram: Timing Circuits.

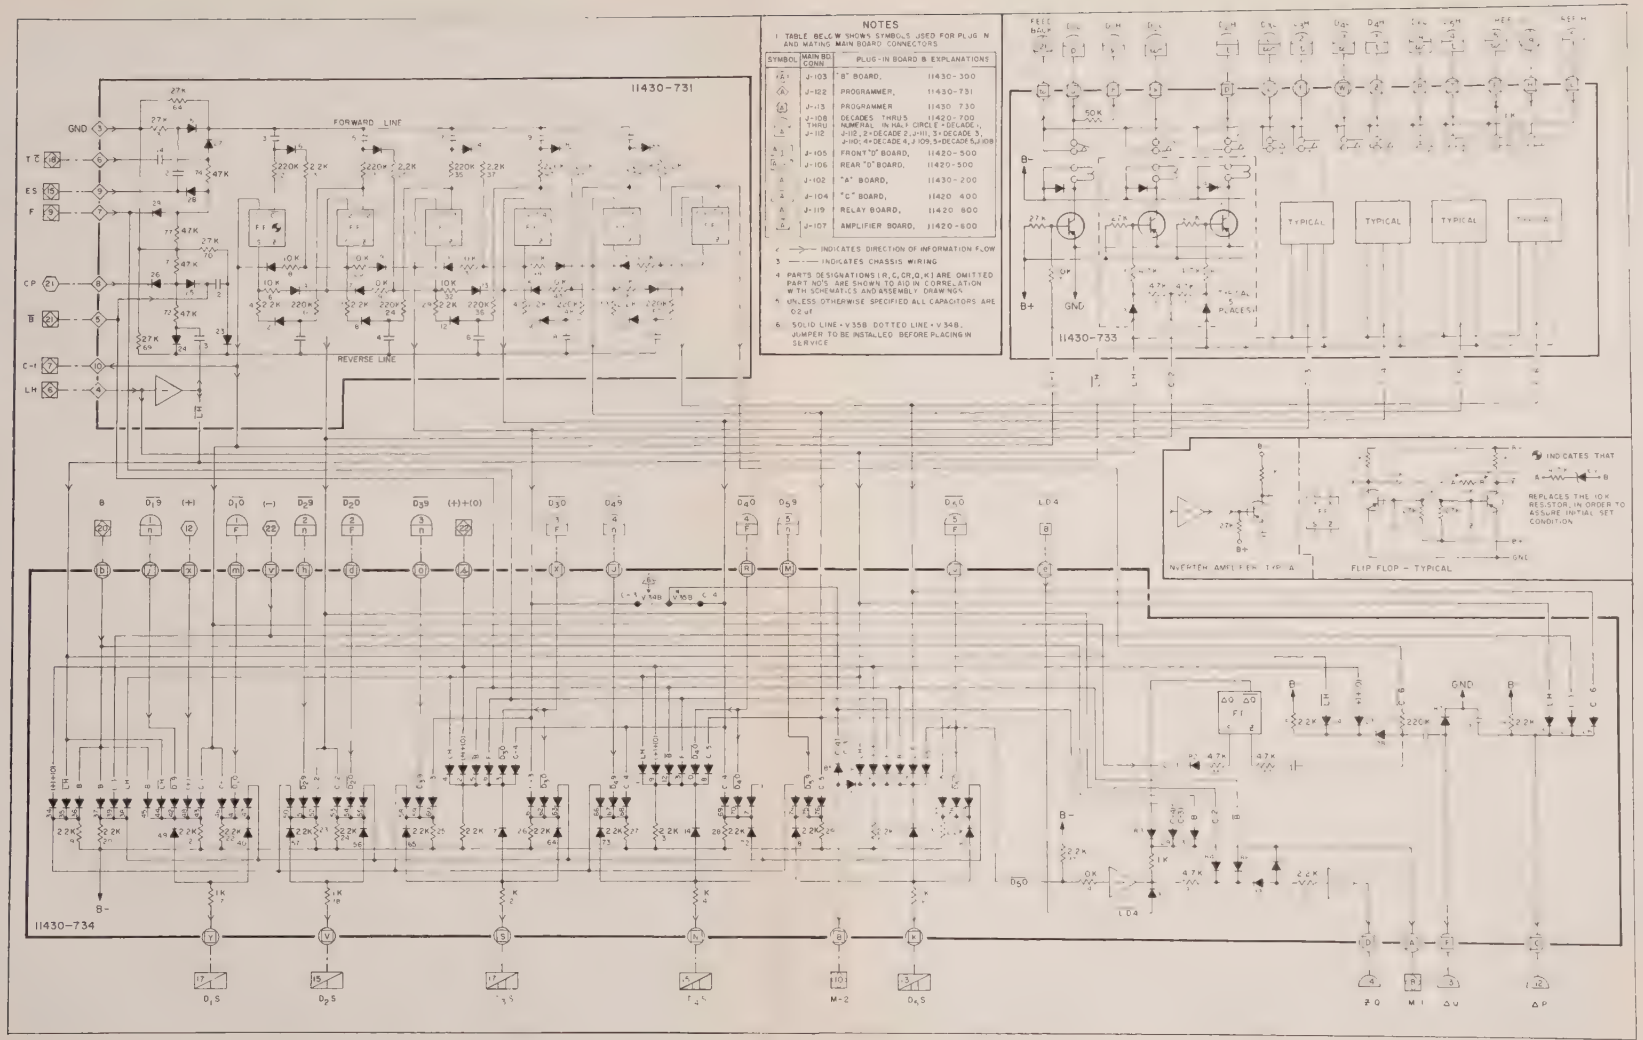

Figure 23. Simplified Schematic & Logic Diagram: Programmer.

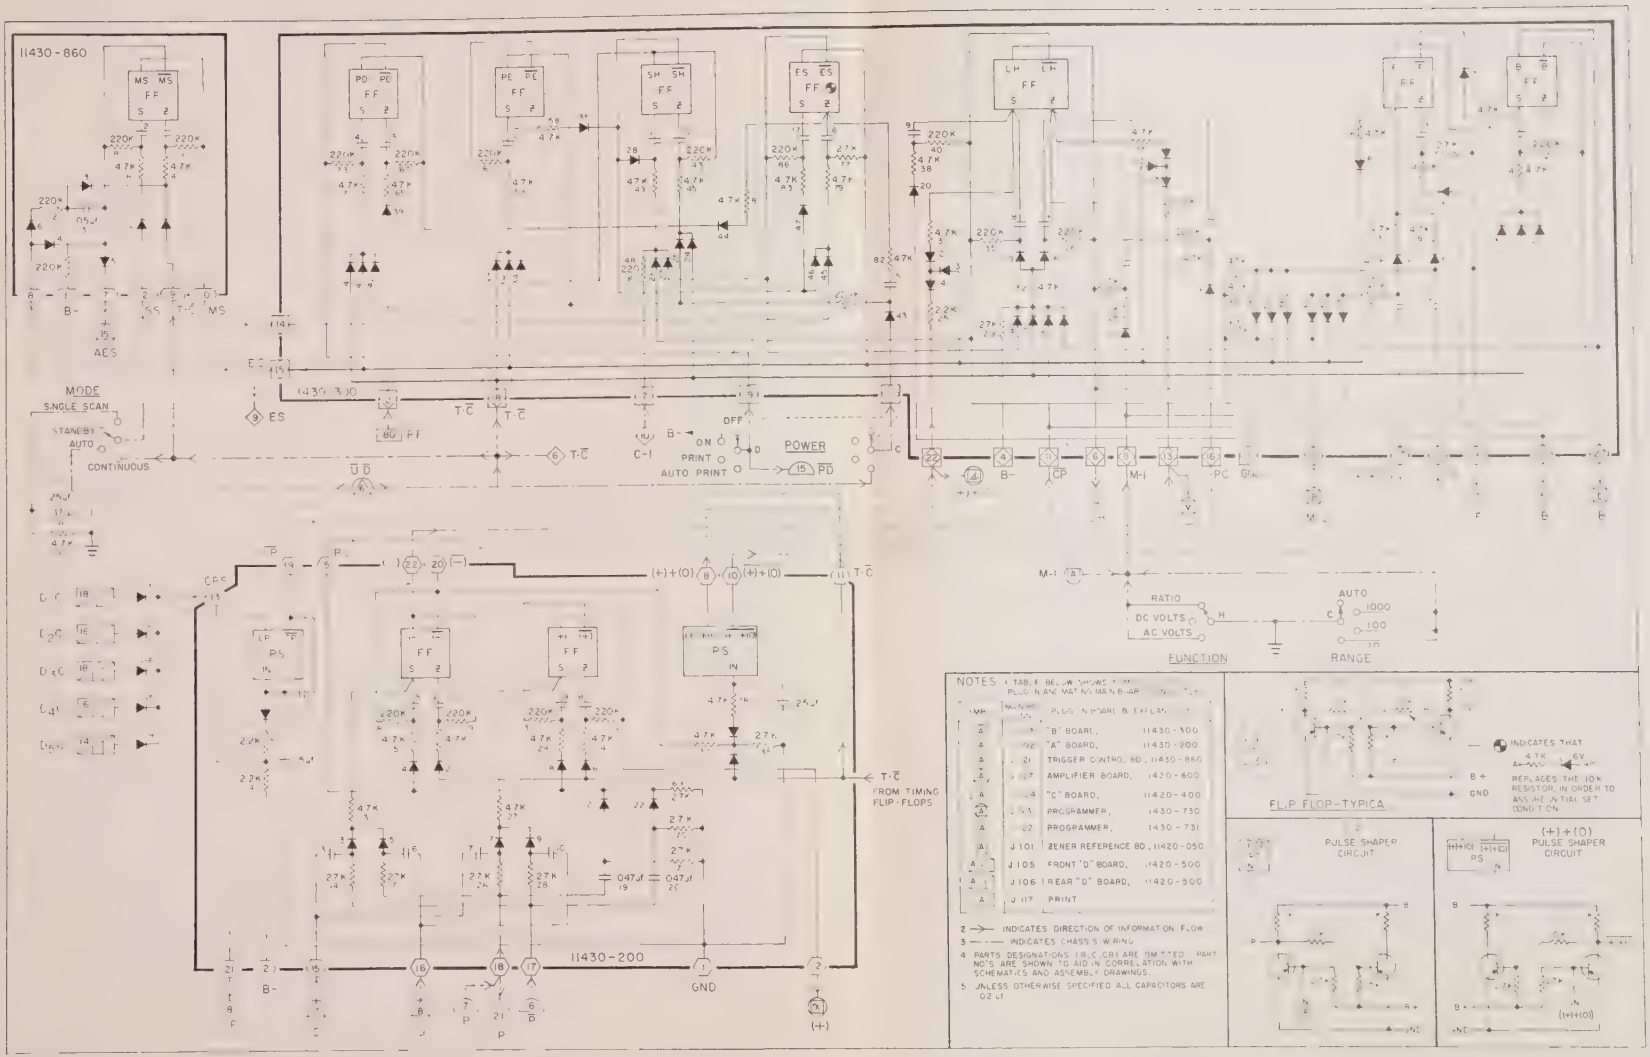

Figure 24. Simplified Schematic & Logic Diagram: Programmer Commands.

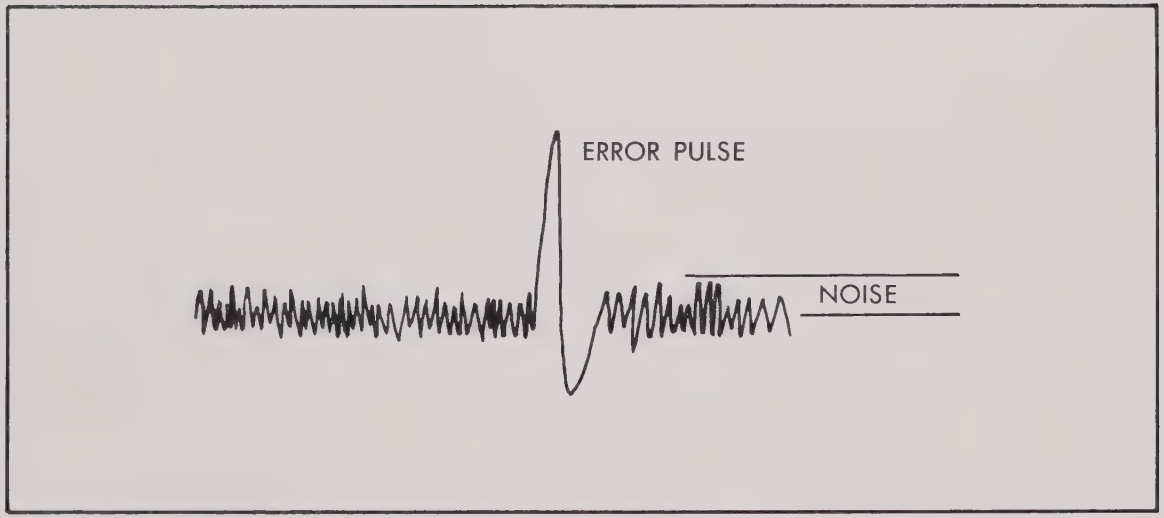

Figure 25. Error Amplifier Output Wave Form.

VOLTS*	JUMPERS	VOLTS*	JUMPERS	VOLTS*	JUMPERS	VOLTS*	JUMPERS
12.631–.619	—	12.312–.300	6–7	11.993–.981	7–8	11.675–.663	6–8
.621–.609	1–2	.302–.280	6–7, 1–2	.983–.971	7–8, 1–2	.665–.653	6–8, 1–2
.611–.599	2–3	.292–.280	6–7, 2–3	.973–.961	7–8, 2–3	.655–.643	6–8, 2–3
.601–.589	1–3	.282–.270	6–7, 1–3	.963–.951	7–8, 1–3	.645–.633	6–8, 1–3
.591–.579	3–4	.272–.260	6–7, 3–4	.953–.941	7–8, 3–4	.635–.623	6–8, 3–4
.581–.569	3–4, 1–2	.262–.250	6–7, 1–2, 3–4	.943–.931	7–8, 3–4, 1–2	.625–.613	6–8, 3–4, 1–2
.571–.559	2–4	.252–.240	6–7, 2–4	.933–.921	7–8, 2–4	.615–.603	6–8, 2–4
.561–.549	1–4	.242–.230	6–7, 1–4	.923–.911	7–8, 1–4	.605–.593	6–8, 1–4
.552–.540	4–5	.232–.220	6–7, 4–5	.914–.902	7–8, 4–5	.595–.583	6–8, 4–5
.542–.530	4–5, 1–2	.222–.210	6–7, 4–5, 1–2	.904–.892	7–8, 4–5, 1–2	.585–.573	6–8, 4–5, 1–2
.532–.520	4–5, 2–3	.213–.201	6–7, 4–5, 2–3	.894–.882	7–8, 4–5, 2–3	.575–.563	6–8, 4–5, 2–3
.522–.510	4–5, 1–3	.203–.191	6–7, 4–5, 1–3	.884–.872	7–8, 4–5, 1–3	.565–.553	6–8, 4–5, 1–3
.512–.500	3–5	.193–.181	6–7, 3–5	.874–.862	7–8, 3–5	.555–.543	6–8, 3–5
.502–.490	3–5, 1–2	.183–.171	6–7, 3–5, 1–2	.864–.852	7–8, 3–5, 1–2	.545–.533	6–8, 3–5, 1–2
.492–.480	2–5	.173–.161	6–7, 2–5	.854–.842	7–8, 2–5	.535–.523	6–8, 2–5
.482–.470	1–5	.163–.151	6–7, 1–5	.844–.832	7–8, 1–5	.525–.513	6–8, 1–5
.472–.460	5–6	.153–.141	5–7	.834–.822	7–8, 5–6	.516–.504	5–8
.462–.450	5–6, 1–2	.143–.131	5–7, 1–2	.824–.812	7–8, 5–6, 1–2	.506–.494	5–8, 1–2
.452–.440	5–6, 2–3	.133–.121	5–7, 2–3	.814–.802	7–8, 5–6, 2–3	.496–.484	5–8, 2–3
.442–.430	5–6, 1–3	.123–.111	5–7, 1–3	.804–.792	7–8, 5–6, 1–3	.486–.474	5–8, 1–3
.432–.420	5–6, 3–4	.113–.101	5–7, 3–4	.794–.782	7–8, 5–6, 3–4	.476–.464	5–8, 3–4
.422–.410	5–6, 3–4, 1–2	.103–.091	5–7, 3–4, 1–2	.784–.772	7–8, 5–6, 3–4, 1–2	.466–.454	5–8, 3–4, 1–2
.412–.400	5–6, 2–4	.093–.081	5–7, 2–4	.774–.762	7–8, 5–6, 2–4	.456–.444	5–8, 2–4
.402–.390	5–6, 1–4	.083–.071	5–7, 1–4	.764–.752	7–8, 5–6, 1–4	.446–.434	5–8, 1–4
.392–.380	4–6	.073–.061	4–7	.754–.742	7–8, 4–6	.436–.424	4–8
.382–.370	4–6, 1–2	.063–.051	4–7, 1–2	.745–.733	7–8, 4–6, 1–2	.426–.414	4–8, 1–2
.372–.360	4–6, 2–3	.053–.041	4–7, 2–3	.735–.723	7–8, 4–6, 2–3	.416–.404	4–8, 2–3
.362–.350	4–6, 1–3	.043–.031	4–7, 1–3	.725–.713	7–8, 4–6, 1–3	.406–.394	4–8, 1–3
.352–.340	3–6	.033–.021	3–7	.715–.703	7–8, 3–6	.396–.384	3–8
.342–.330	3–6, 1–2	.023–.011	3–7, 1–2	.705–.693	7–8, 3–6, 1–2	.386–.374	3–8, 1–2
.332–.320	2–6	.013–.001	2–7	.695–.683	7–8, 2–6	.376–.364	2–8
.322–.310	1–6	12.003–11.991	1–7	.685–.673	7–8, 1–6	.366–.354	1–8

*MEASURED BETWEEN PINS 6 & 5 OF P–802 (ZENER REF. ASSY), WITH *NO* JUMPERS INSTALLED.

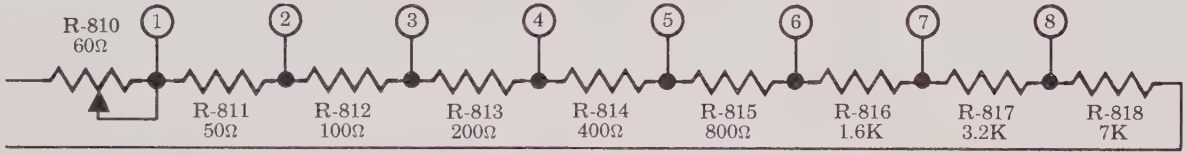

Figure 26. Jumper Connections for 10-Volt Calibrate Resistors.

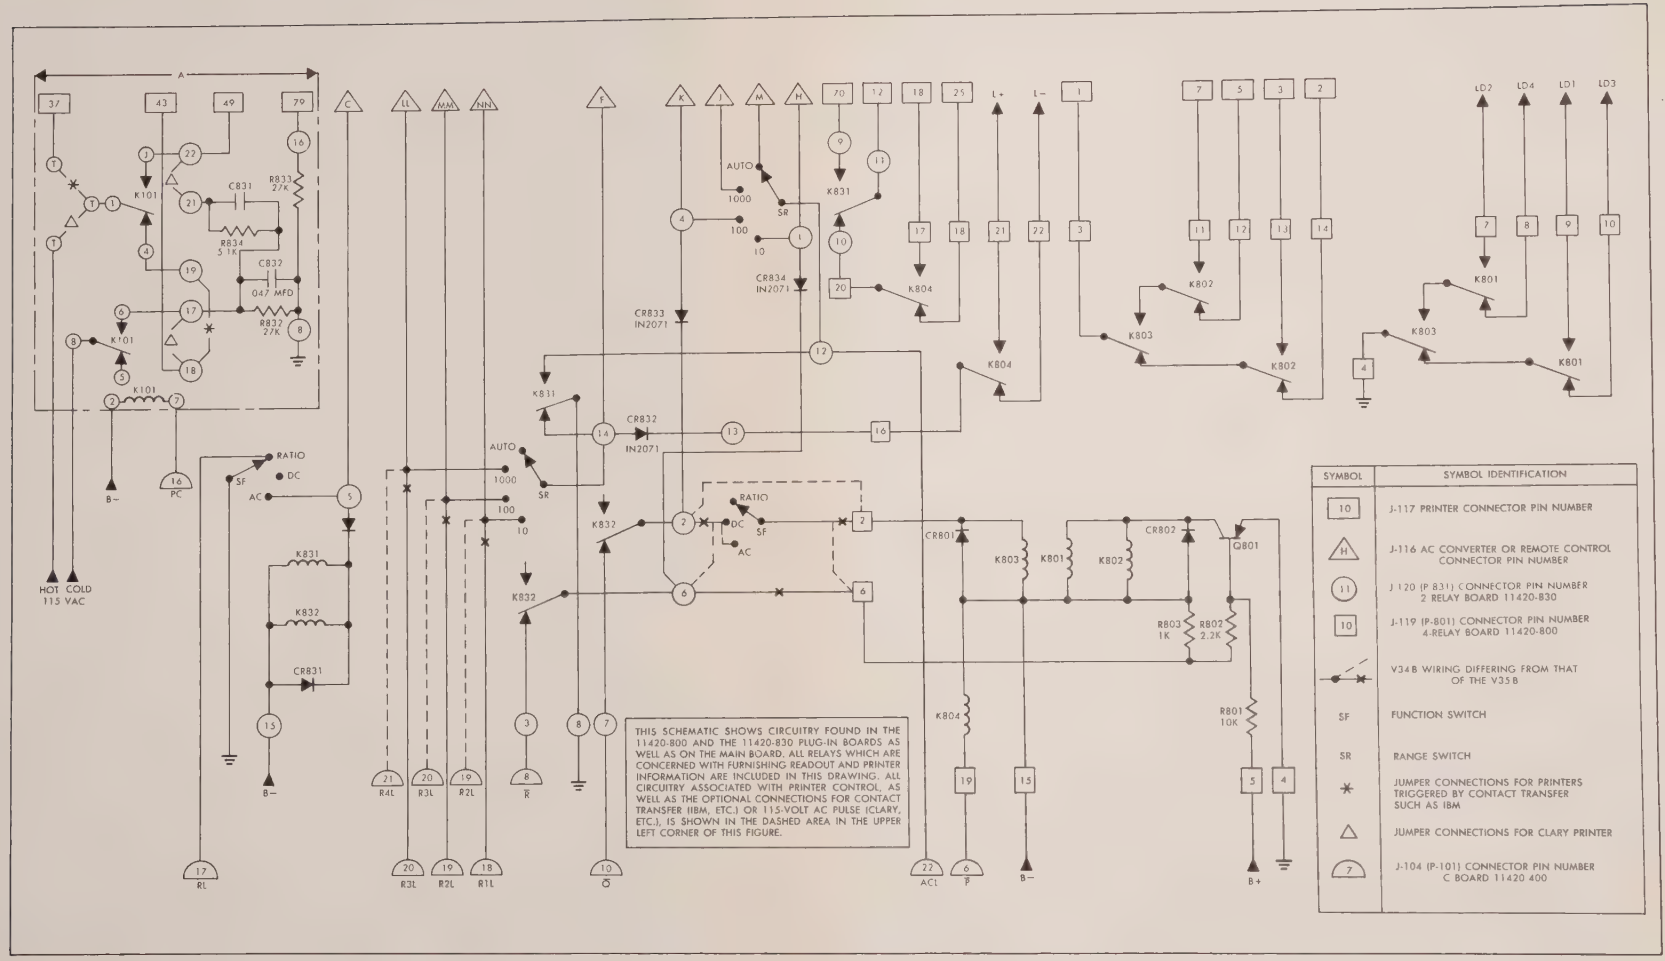
A
37
43
49
79
C
LL
MM
NN
F
K
J
M
H
70
12
18
25
L+
L−
1
7
5
3
2
LD2
LD4
LD1
LD3
K101
C831
R833 27K
R834 5.1K
C832 .047 MFD
R832 27K
K831
K832
CR831
CR832 IN2071
CR833 IN2071
CR834 IN2071
K801
K802
K803
K804
AUTO
SR
1000
100
10
RATIO
DC
AC
SF
B−
PC
HOT 115 VAC
COLD
RL
R4L
R3L
R2L
R
Ō
AC1
P
B+
CR801
CR802
Q801
R801 10K
R802 2.2K
R803 1K
THIS SCHEMATIC SHOWS CIRCUITRY FOUND IN THE 11420-800 AND THE 11420-830 PLUG-IN BOARDS AS WELL AS ON THE MAIN BOARD. ALL RELAYS WHICH ARE CONCERNED WITH FURNISHING READOUT AND PRINTER INFORMATION ARE INCLUDED IN THIS DRAWING. ALL CIRCUITRY ASSOCIATED WITH PRINTER CONTROL, AS WELL AS THE OPTIONAL CONNECTIONS FOR CONTACT TRANSFER (IBM, ETC.) OR 115-VOLT AC PULSE (CLARY, ETC.), IS SHOWN IN THE DASHED AREA IN THE UPPER LEFT CORNER OF THIS FIGURE.
SYMBOL
SYMBOL IDENTIFICATION
10
J-117 PRINTER CONNECTOR PIN NUMBER
H
J-116 AC CONVERTER OR REMOTE CONTROL CONNECTOR PIN NUMBER
11
J 120 (P 831) CONNECTOR PIN NUMBER 2 RELAY BOARD 11420-830
10
J-119 (P-801) CONNECTOR PIN NUMBER 4-RELAY BOARD 11420-800
V34B WIRING DIFFERING FROM THAT OF THE V35B
SF
FUNCTION SWITCH
SR
RANGE SWITCH
JUMPER CONNECTIONS FOR PRINTERS TRIGGERED BY CONTACT TRANSFER SUCH AS IBM
JUMPER CONNECTIONS FOR CLARY PRINTER
7
J-104 (P-101) CONNECTOR PIN NUMBER C BOARD 11420 400

Figure 28. Front View of Readout (without visor) Showing Lamps Correctly Installed.

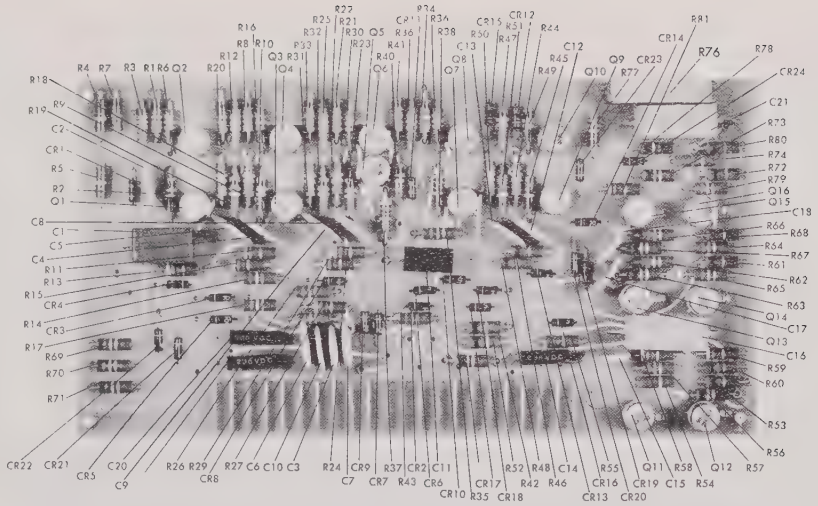

Figure 29. A Board.

CIRCUIT REFERENCE	PART NUMBER	DESCRIPTION	QTY PER UNIT	MANUFACTURER
C2–C10, 12, 13, 15, 17, 18	BT.02	CAPACITOR, .02 Mfd., ±20%	14	RMC
C14, 19, 20	ME2–473E	CAPACITOR, Metalized Paper, .047 Mfd., 200 VDC	3	Electron
C11	ME1–254E	CAPACITOR, Metalized Paper, .25 Mfd., 100 VDC	1	Electron
C1	ME1–504E	CAPACITOR, Metalized Paper, .5 Mfd., 100 VDC	1	Electron
C16, 21	ME1–105	CAPACITOR, Metalized Paper, 1 Mfd., 100 VDC	2	Electron
R76	275–1–103	POTENTIOMETER, 10K	1	Bourns
R9, 18, 22, 31	EB2241	RESISTOR, 220K, ½W, 10%	4	Allen Bradley
R3, 6, 12, 14, 16, 17, 25, 26 R28, 30, 35, 36, 39, 43, 44, 50 R57, 62, 64, 65, 66, 69, 70, 71, 79	EB2731	RESISTOR, 27K, ½W, 10%	25	Allen Bradley
R77	EB1831	RESISTOR, 18K, ½W, 10%	1	Allen Bradley
R78	EB1331	RESISTOR, 20K, ½W, 10%	1	Allen Bradley
R2, 10, 19, 23, 32, 40, 47, 49, 56, 63, 67, 73, 75	EB1031	RESISTOR, 10K, ½W, 10%	13	Allen Bradley
R11, 13, 15, 24, 27, 29, 37, 38, 58, 59, 81	EB4721	RESISTOR, 4.7K, ½W, 10%	11	Allen Bradley
R74	EB2721	RESISTOR, 2.7K, ½W, 10%	1	Allen Bradley
R4, 5, 45, 51, 54, 55	EB2221	RESISTOR, 2.2K, ½W, 10%	6	Allen Bradley
R1, 7, 8, 20, 21, 33, 34 R41, 46, 48, 53, 61, 68, 72, 80	EB1021	RESISTOR, 1K, ½W, 10%	15	Allen Bradley
R60	EB2015	RESISTOR, 200 Ohm, ½W, 10%	1	Allen Bradley
R42, 52	EB1011	RESISTOR, 100 Ohm, ½W, 10%	2	Allen Bradley
CR1–CR24	5003–002	DIODE	24	NLS
Q1–Q16	2N1374	TRANSISTOR	16	T.I.

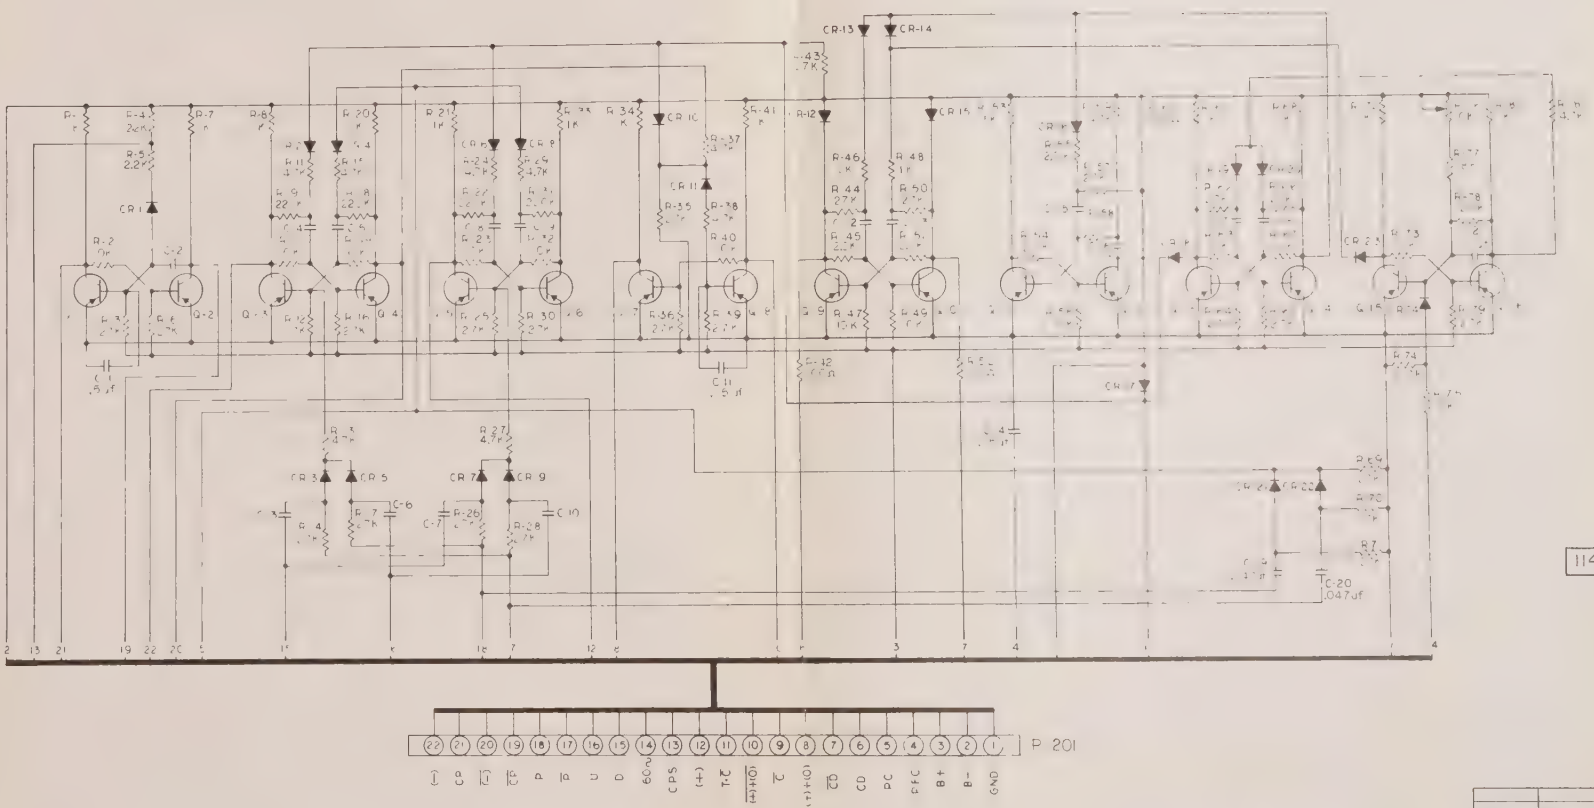

11430-200

REVISIONS				
REV	SYMBOL	DESCRIPTION	DATE	APPROVAL

NEXT ASSY	USED ON	NEXT ASSY	FINAL ASSY
APPLICATION		QTY REQD	

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE OF HIGHER TOLERANCES OR FRACTION DECIMAL UNLESS X
MATERIAL

DRAWN BY D. COLETTA DATE 6-5-61
CHECKED BY DATE
APPROVED BY DATE 9-7-61
FINISH

TITLE
SCHEMATIC
"A" BOARD ASS'Y.
V 34B / V 35B
SCALE WT

NON-LINEAR SYSTEMS INC.
DEL MAR AIRPORT
DEL MAR CALIFORNIA
DRAWING NUMBER 11430-200
SHEET 2 OF 2

3. TRANSISTORS ARE TYPE 2N1374
2. CAPACITORS ARE .02 uf
1. ALL DIODES ARE NLS TYPE 5003-002

NOTES: UNLESS OTHERWISE SPECIFIED

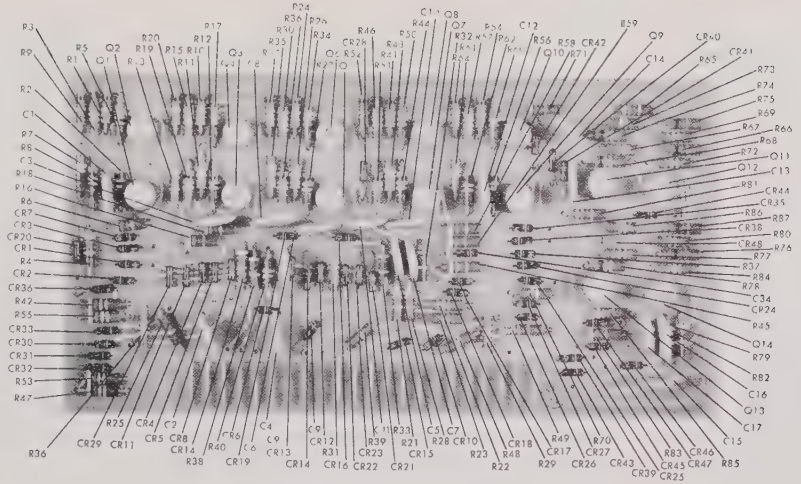

Figure 30. B Board.

CIRCUIT REFERENCE	PART NUMBER	DESCRIPTION	QTY PER UNIT	MANUFACTURER
C1-C17	BT.02	CAPACITOR, .02 Mfd., ±20%	17	Radio Mat'ls. Co.
R7, 23, 26, 35, 40, 43, 48, 61, 67, 70, 73, 86	EB2241	RESISTOR, 220K, ½W, 10%	12	Allen Bradley
R42, 47, 53, 55	EB4731	RESISTOR, 47K, ½W, 10%	4	Allen Bradley
R3, 5, 11, 15, 17, 22, 29, 30, 34, 46, 50, 57, 60, 63, 69, 72, 80, 84, 77	EB2731	RESISTOR, 27K, ½W, 10%	19	Allen Bradley
R2, 8, 12, 19, 27, 36, 44, 51, 56, 62, 68, 74, 78	EB1031	RESISTOR, 10K, ½W, 10%	13	Allen Bradley
R4, 6, 13, 16, 18, 21, 32, 38, 45, 49, 58, 59, 65, 71, 79, 81, 82, 83, 85, 31, 33	EB4721	RESISTOR, 4.7K, ½W, 10%	21	Allen Bradley
R25, 39	EB2221	RESISTOR, 2.2K, ½W, 10%	2	Allen Bradley
R1, 9, 10, 20, 24, 37, 41, 52, 54, 64, 66, 75, 76, 87, 14, 28	EB1021	RESISTOR, 1K, ½W, 10%	16	Allen Bradley
CR48	¼M6.8Z	DIODE, Zener	1	Motorola
CR1–CR47	5003–002	DIODE	47	NLS
Q1–Q14	2N1374	TRANSISTOR	14	T.I.

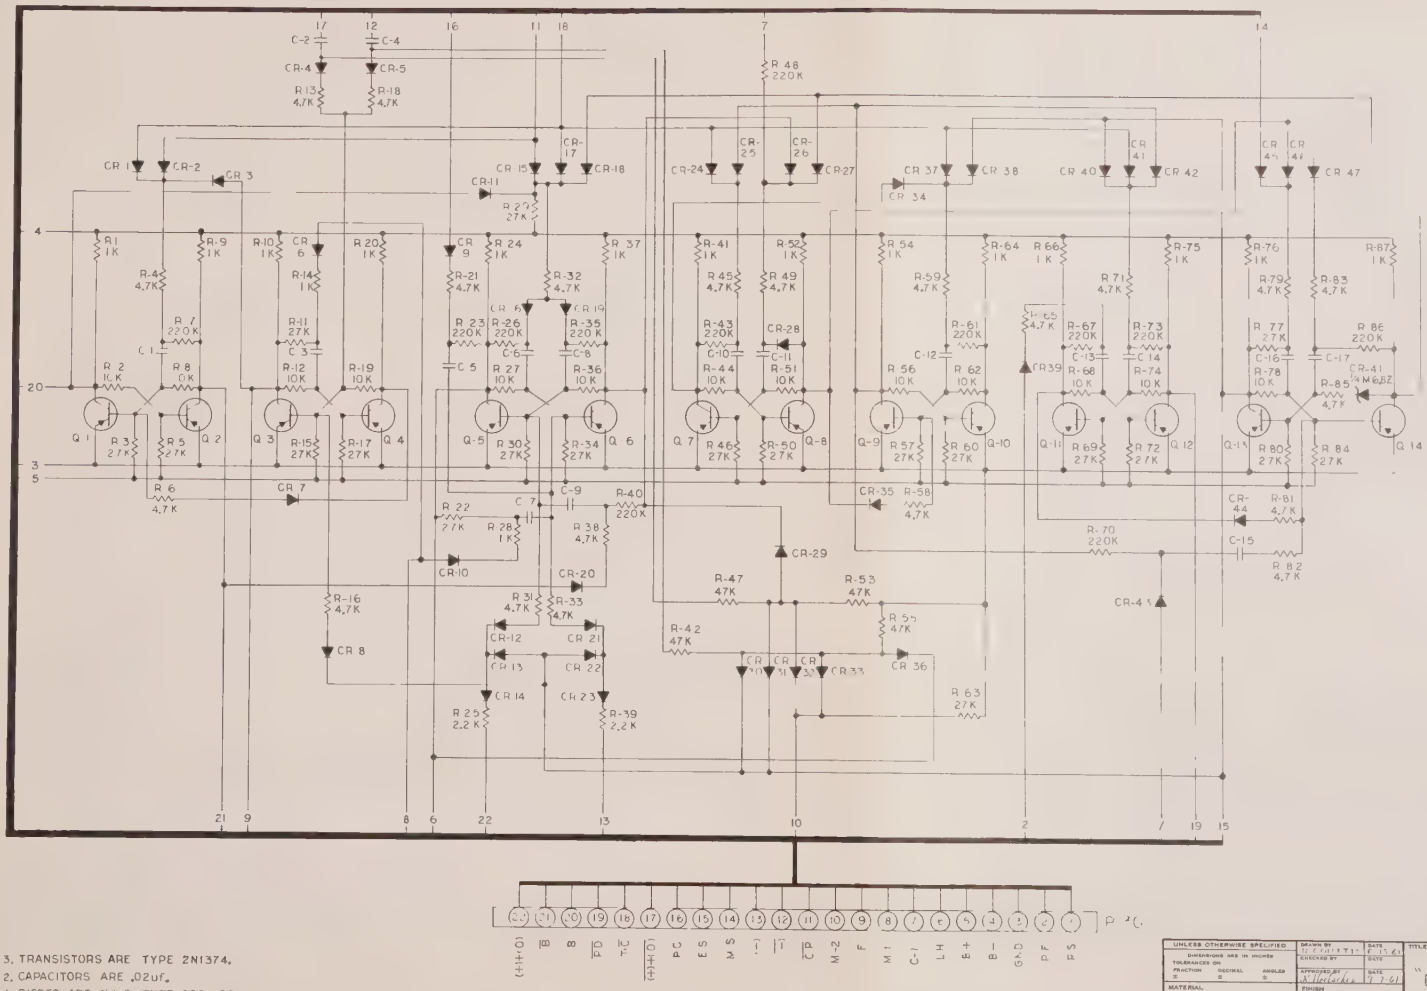

3. TRANSISTORS ARE TYPE 2N1374.
2. CAPACITORS ARE .02uf.
1. DIODES ARE N.L.S. TYPE 5003-002.

NOTES: UNLESS OTHERWISE SPECIFIED

REVISIONS				
SYM	EFFECT	DESCRIPTION	DATE	APPROVAL
	1	CHANGE CR 44 TO CR 43	12-4-61	

11430-300
1

UNLESS OTHERWISE SPECIFIED	DRAWN BY	DATE
DIMENSIONS ARE IN INCHES		
TOLERANCES ON	CHECKED BY	DATE
FRACTION DECIMAL ANGLES	APPROVED BY	DATE
MATERIAL	FINISH	

TITLE: SCHEMATIC "B" BOARD ASS'Y.

11B/11BB

SCALE WT

NON-LINEAR SYSTEMS INC.
DEL MAR AIRPORT
DEL MAR CALIFORNIA

DRAWING NUMBER 11430-300

SHEET 2 OF 2

NEXT ASSY	USED ON	NEXT ASSY	FINAL ASSY
APPLICATION		QTY REQD	

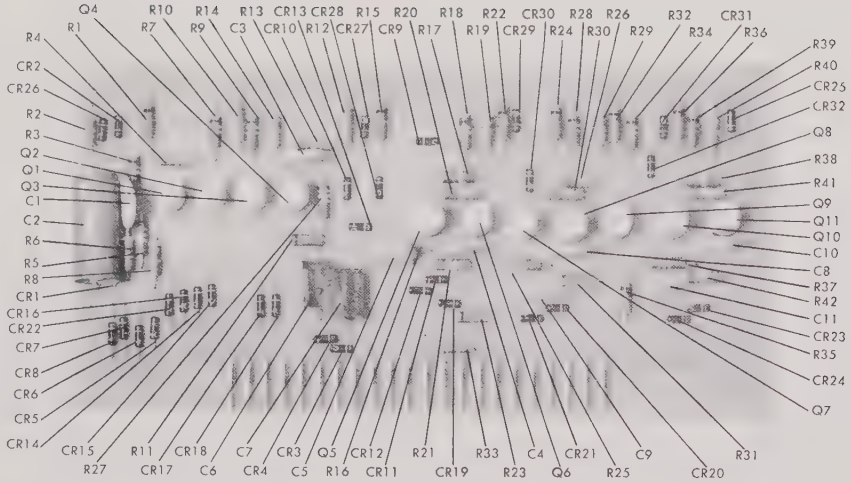

Figure 31. C Board.

CIRCUIT REFERENCE	PART NUMBER	DESCRIPTION	QTY PER UNIT	MANUFACTURER
R16, R21	EB2241	RESISTOR, 220K, ½ W, 10%	2	Allen Bradley
R5, R25, R27, R31, R37, R42	EB2731	RESISTOR, 27K, ½ W, 10%	6	Allen Bradley
R3, R7, R9, R18, R28, R34, R39	EB1031	RESISTOR, 10K, ½ W, 10%	7	Allen Bradley
R2, R6, R8, R14, R19, R29, R33, R40	EB4721	RESISTOR, 4.7K, ½ W, 10%	8	Allen Bradley
R4, R10, R12, R13, R20, R30, R41	EB2221	RESISTOR, 2.2K, ½ W, 10%	7	Allen Bradley
R17, R26, R38	EB1521	RESISTOR, 1.5K, ½ W, 10%	3	Allen Bradley
R1, R11, R15, R22, R23, R24, R32, R35, R36	EB1021	RESISTOR, 1K, ½ W, 10%	9	Allen Bradley
C2	52RM25	CAPACITOR, Electrolytic, 25 Mfd. 25 VDC	1	Ind. Cond.
C1, C3, C4, C5, C8, C9, C10, C11	BT.02	CAPACITOR, .02 Mfd., ±20%, 100 VDC	8	RMC
C6, C7	DEZ 473E	CAPACITOR, Metalized Mylar, .047 Mfd., 200 VDC	2	Electron
CR1 thru CR32	5003–002	DIODE	32	NLS
Q1 thru Q11	2N1374	TRANSISTOR	11	T.I.

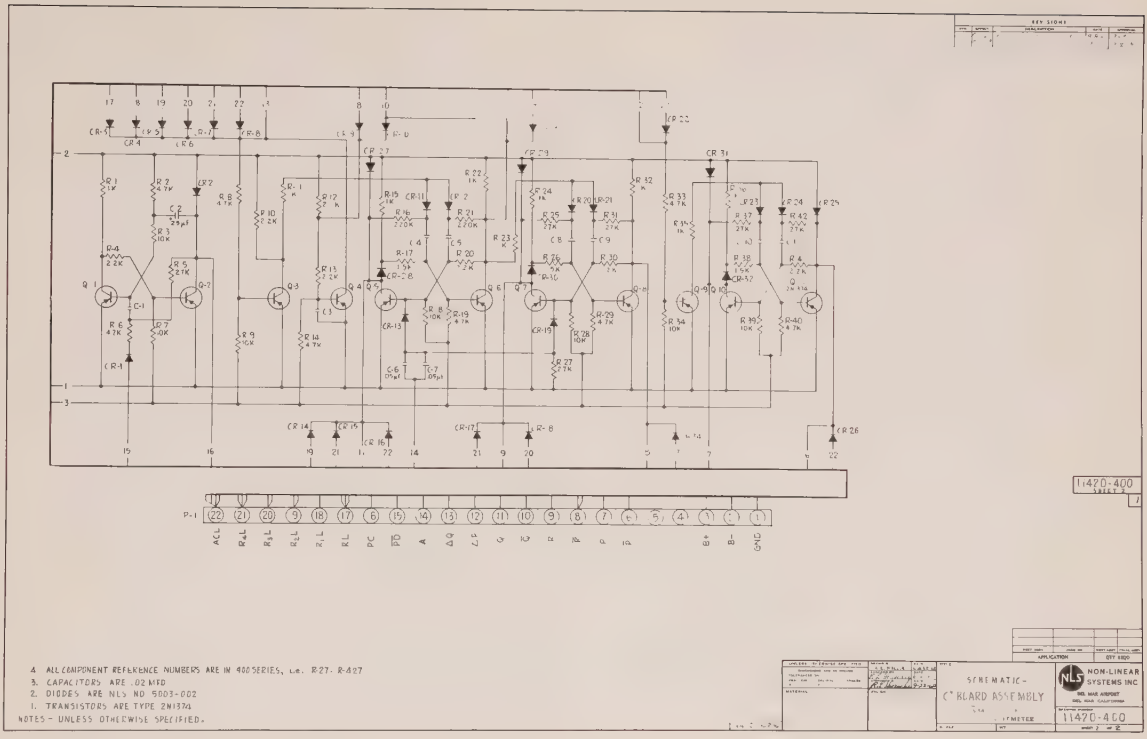
NOTES - UNLESS OTHERWISE SPECIFIED.
1. ALL COMPONENT REFERENCE NUMBERS ARE IN 400 SERIES, i.e. R-27 - R-427
2. DIODES ARE NLS NO 5003-002
3. CAPACITORS ARE .02 MFD
4. TRANSISTORS ARE TYPE 2N1374
SCHEMATIC - C BOARD ASSEMBLY
NON-LINEAR SYSTEMS INC
11420-400

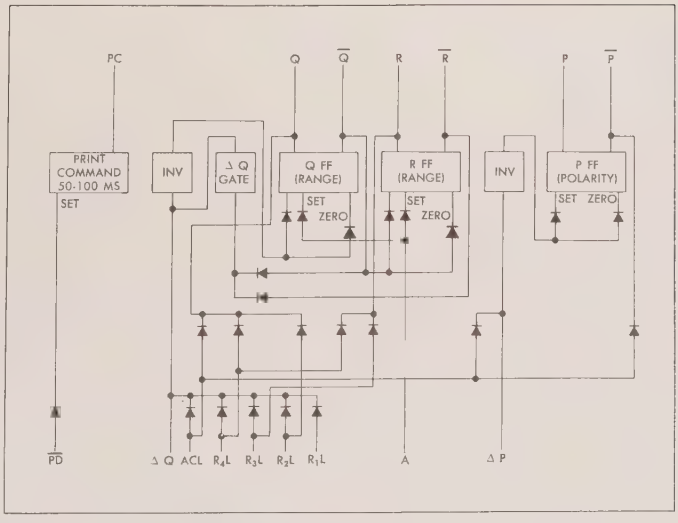

Figure 32. C Board Block Diagram.

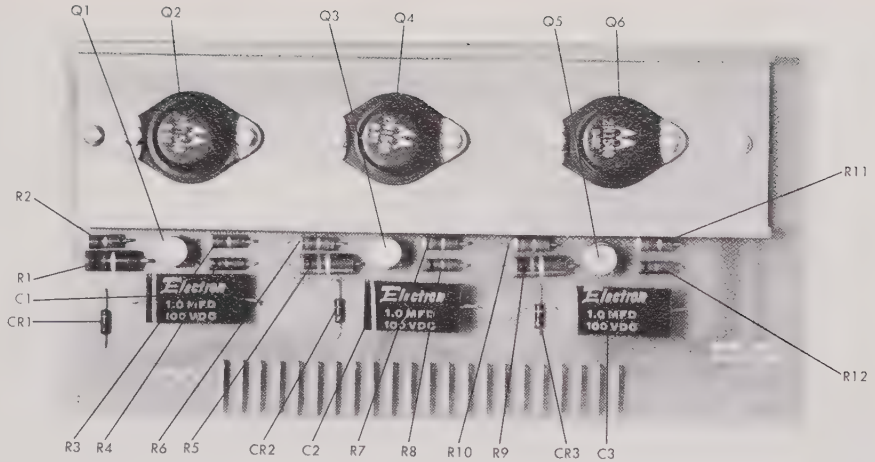

11420–500 D BOARD

Figure 33. D Board (Instrument uses Two D Boards).

CIRCUIT REFERENCE	PART NUMBER	DESCRIPTION	QTY PER UNIT	MANUFACTURER
C1, C2, C3	ME1–105	CAPACITOR, Met. Paper, 1 Mfd., 100 VDC	3	Electron
R2, R3, R6, R7, R10, R11	EB4721	RESISTOR, 4.7K Ohm, ½ W, 10%	6	Allen Bradley
R4, R8, R12	EB1021	RESISTOR, 1K Ohm, ½ W, 10%	3	Allen Bradley
R1, R5, R9	GB1011	RESISTOR, 100 Ohm, 1W, 10%	3	Allen Bradley
CR1, CR2, CR3	5003–002	DIODE	3	NLS
Q2, Q4, Q6	2N1540	TRANSISTOR	3	Motorola
Q1, Q3, Q5	2N1374	TRANSISTOR	3	T.I.

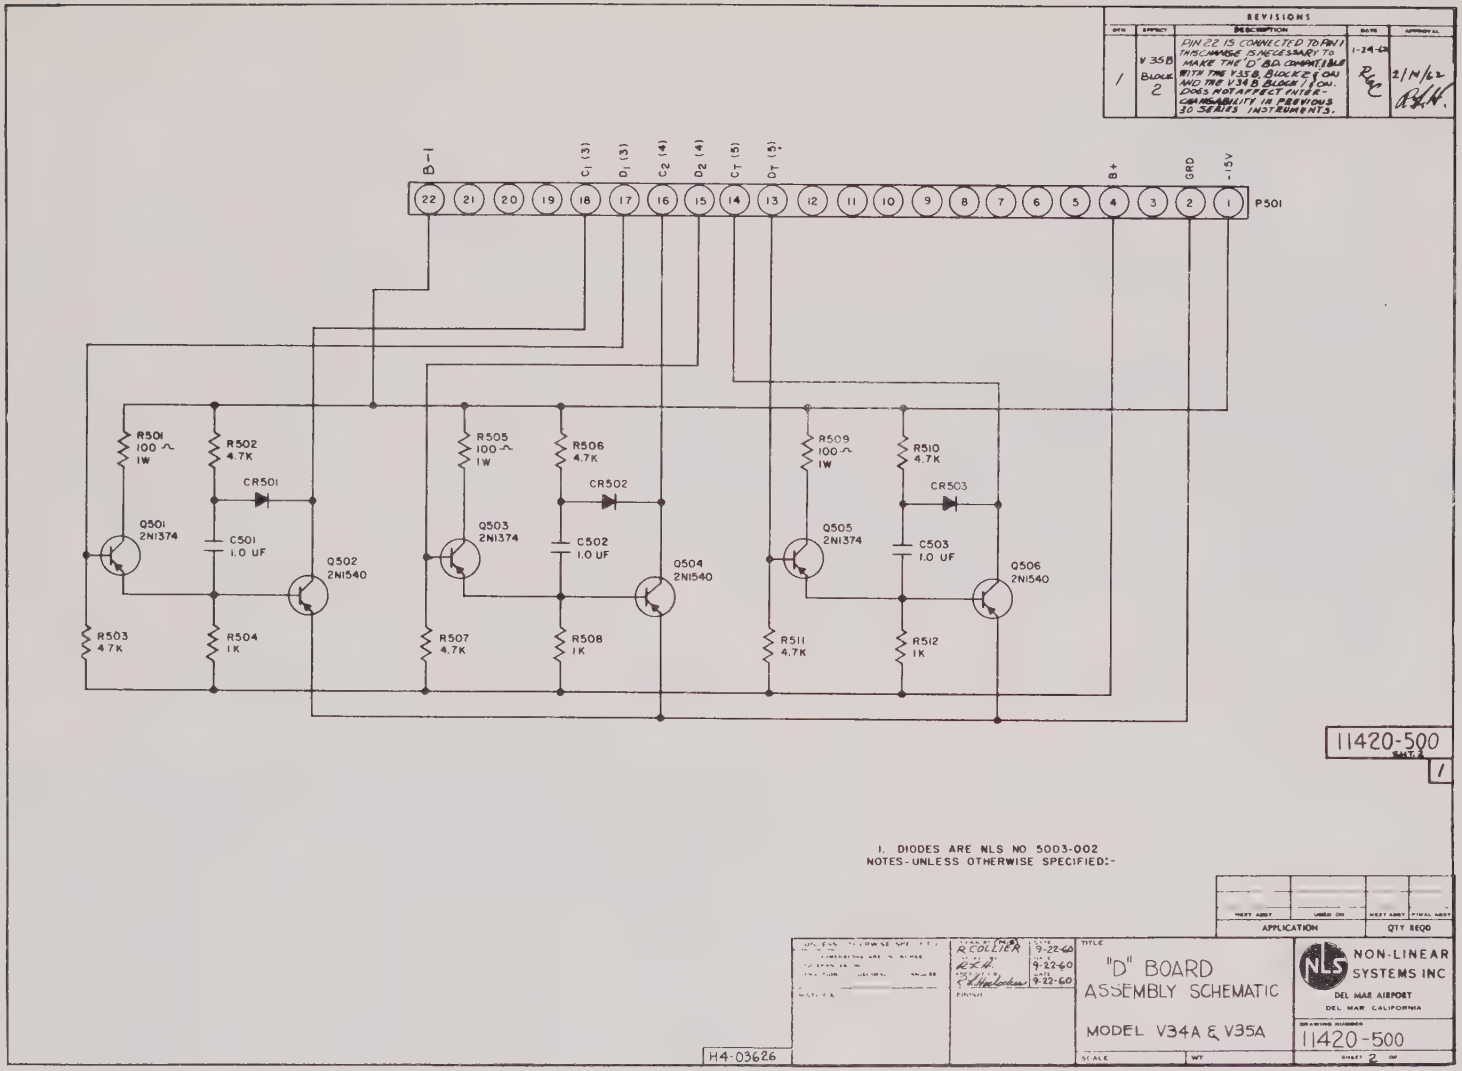
REVISIONS
DESCRIPTION
DIN 22 IS CONNECTED TO PIN 1 THIS CHANGE IS NECESSARY TO MAKE THE "D" BD. COMPATIBLE WITH THE V35B BLOCK 2 OSC. AND THE V34B BLOCK 1 OSC. DOES NOT AFFECT INTER-CHANGEABILITY IN PREVIOUS 30 SERIES INSTRUMENTS.
1-24-62
2/N/62
B-1
C1 (3)
D1 (3)
C2 (4)
D2 (4)
CT (5)
DT (5)
B+
GRD
-15V
P501
R501 100 Ω 1W
R502 4.7K
CR501
Q501 2N1374
C501 1.0 UF
Q502 2N1540
R503 4.7K
R504 1K
R505 100 Ω 1W
R506 4.7K
CR502
Q503 2N1374
C502 1.0 UF
Q504 2N1540
R507 4.7K
R508 1K
R509 100 Ω 1W
R510 4.7K
CR503
Q505 2N1374
C503 1.0 UF
Q506 2N1540
R511 4.7K
R512 1K
11420-500
1
1. DIODES ARE NLS NO 5003-002
NOTES-UNLESS OTHERWISE SPECIFIED:-
APPLICATION
QTY REQD
R COLLIER 9-22-60
9-22-60
9-22-60
"D" BOARD ASSEMBLY SCHEMATIC
MODEL V34A & V35A
NON-LINEAR SYSTEMS INC
DEL MAR AIRPORT
DEL MAR CALIFORNIA
11420-500
H4-03626

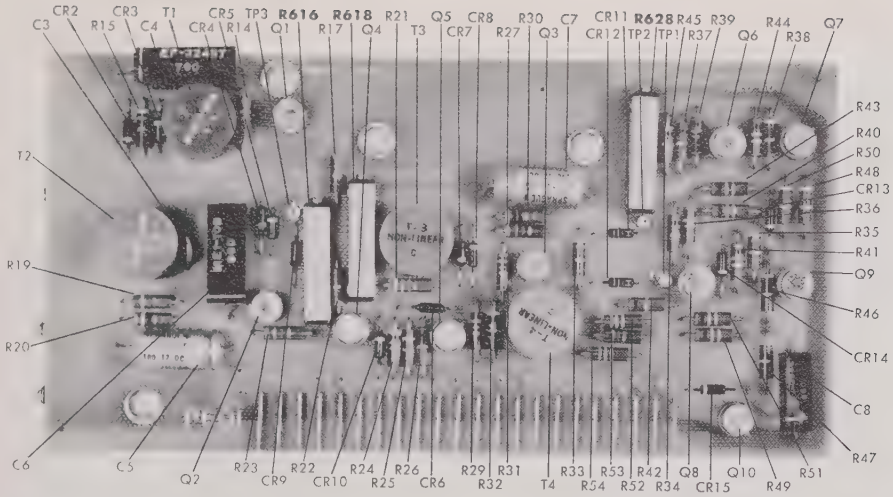

Figure 34. Amplifier, Front View.

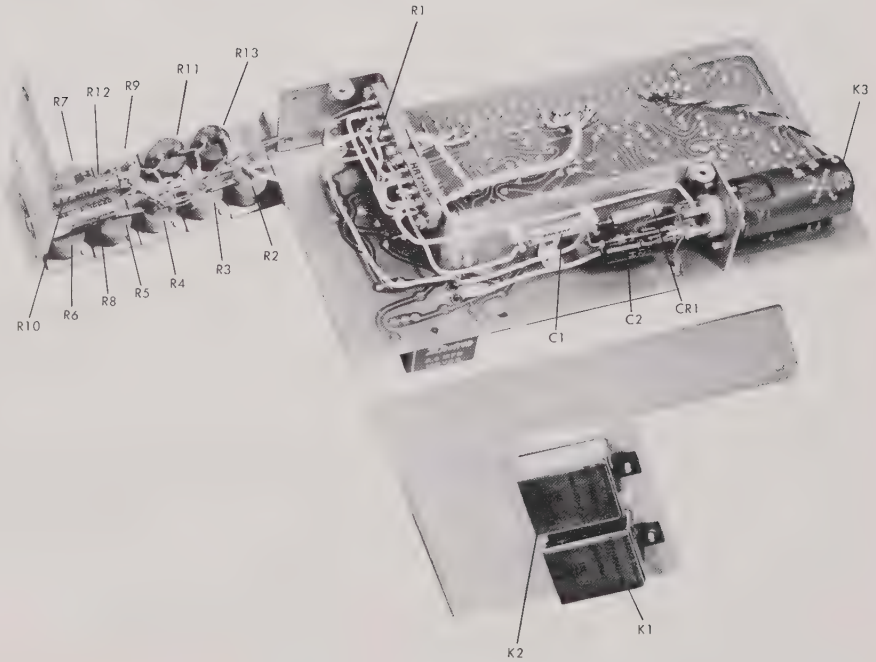

Figure 35. Amplifier, Rear View (partially disassembled).

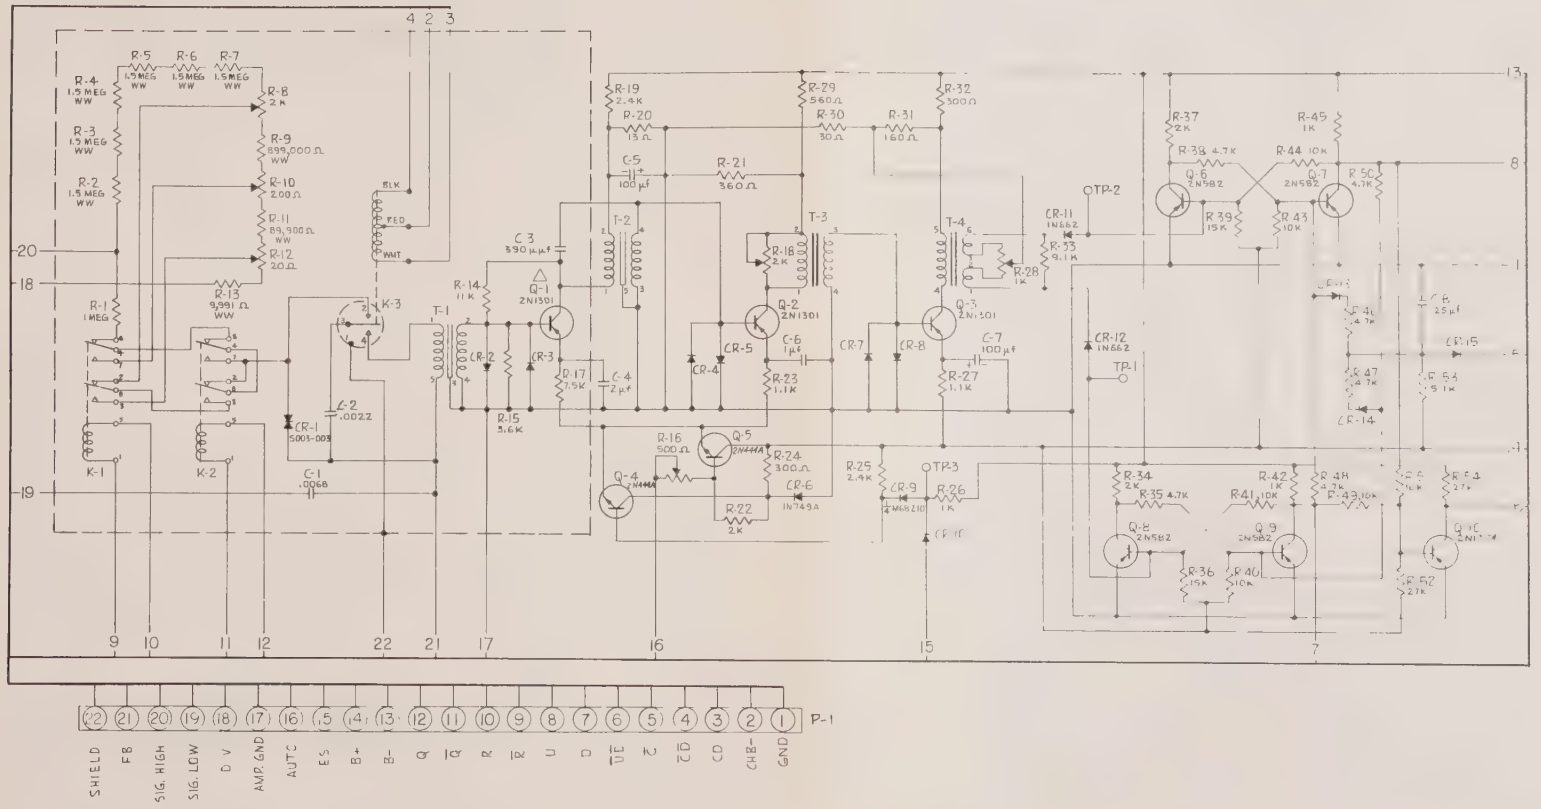

11420-ECO
SHEET 2

APPLICATION	QTY REQD

SELECTED FOR LOW NOISE.
3 ALL COMPONENT REF. NUMBERS ARE IN THE 600 SERIES; i.e. P-1 - P-601
2 DIODES ARE TYPE 5003-002.
1. CAPACITOR VALUE IS IN MICROFARADS.
NOTES UNLESS OTHERWISE SPECIFIED:-

		SCHEMATIC - AMPLIFIER BD. ASSEM. V34A DIGITAL VOLTMETER	NON-LINEAR SYSTEMS INC DEL MAR AIRPORT
	N Clement 6-30-69	SCALE	DRAWING NUMBER 11420-600
		WT	SHEET 2 OF

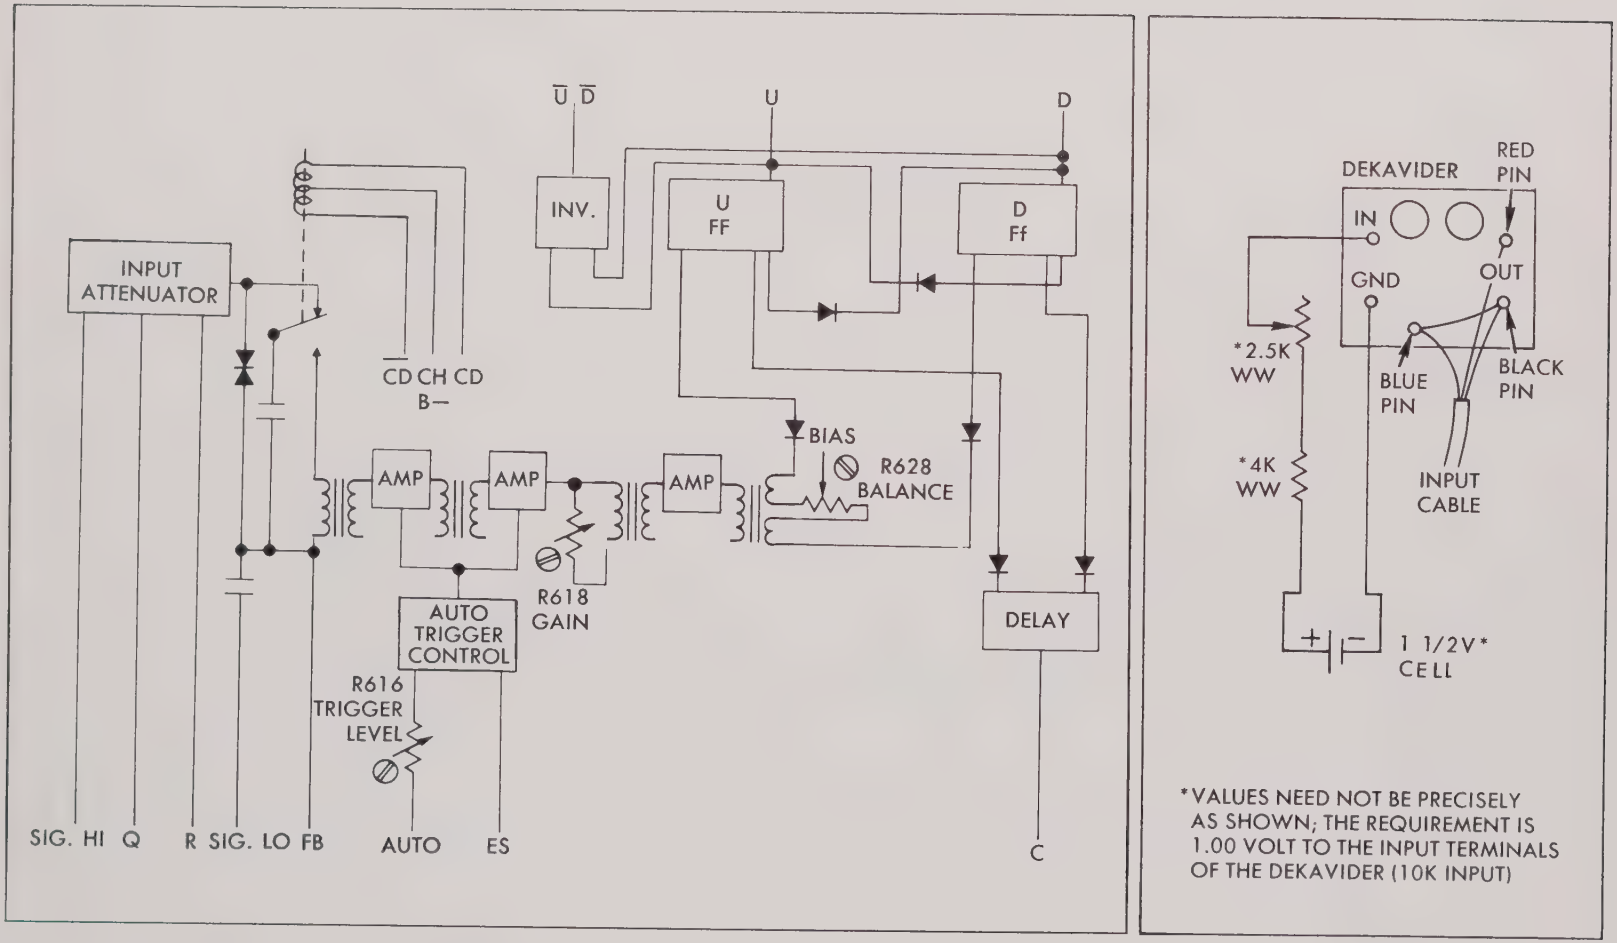

Figure 36. Amplifier Block Diagram and Voltage Source for Test.

CIRCUIT REFERENCE	PART NUMBER	DESCRIPTION	QTY PER UNIT	MANUFACTURER
T1	11420–607	TRANSFORMER, Isolation	1	NLS
T2	11420–608	TRANSFORMER, Input	1	NLS
T3	11420–609	TRANSFORMER, Interstage	1	NLS
T4	11420–610	TRANSFORMER, Output	1	NLS
Q1, 2, 3	2N1301	TRANSISTOR	3	RCA
Q6, 7, 8, 9	2N582	TRANSISTOR	4	RCA
Q10	2N1374	TRANSISTOR	1	TI
Q4, 5	2N444A	TRANSISTOR	2	GT
CR11, 12	1N662	DIODE	2	Transitron
CR2–5, 7, 8, 10, 13, 14, 15	5003–002	DIODE	10	NLS
CR6	1N749A	DIODE	1	TI
CR9	¼M6.8Z10	DIODE	1	Motorola
C5, 7	TE 1135	CAPACITOR, Electrolytic, 100 Mfd, 12 VDCW	2	Sprague
C4	5002–001	CAPACITOR	1	NLS
C6	ME1–105	CAPACITOR, Metalized Paper, 1 Mfd, 100 VDCW	1	Electron
C8	ME1–254E	CAPACITOR, Metalized Paper, .25 Mfd, 10%, 100 VDCW	1	Electron
C3	DD391	CAPACITOR, Ceramic, 390 Mfd, 10%, 1000 VDCW	1	Centralab
R16	275–1–501	POTENTIOMETER, 500 Ohm	1	Bourns
R28	275–1–102	POTENTIOMETER, 1 K Ohm	1	Bourns
R18	275–1–202	POTENTIOMETER, 2 K Ohm	1	Bourns
R31	EB 1615	RESISTOR, 160 Ohm, ½W, 5%	1	Allen Bradley
R24, 32	EB 3015	RESISTOR, 300 Ohm, ½W, 5%	2	Allen Bradley
R21	EB 5615	RESISTOR, 360 Ohm, ½W, 5%	1	Allen Bradley
R29	EB 3615	RESISTOR, 560 Ohm, ½W, 5%	1	Allen Bradley
R26, 42, 45	EB 1021	RESISTOR, 1 K Ohm, ½W, 10%	3	Allen Bradley
R23, 27	EB 1125	RESISTOR, 1.1 K Ohm, ½W, 5%	2	Allen Bradley
R22, 34, 37	EB 2025	RESISTOR, 2 K Ohm, ½W, 5%	3	Allen Bradley
R19, 25	EB 2425	RESISTOR, 2.4 K Ohm, ½W, 5%	2	Allen Bradley
R15	EB 3625	RESISTOR, 3.6 K Ohm, ½W, 5%	1	Allen Bradley
R35, 38, 46, 47, 48, 50	EB 4721	RESISTOR, 4.7 K Ohm, ½W, 10%	6	Allen Bradley
R53	EB 5125	RESISTOR, 5.1 K Ohm, ½W, 5%	1	Allen Bradley
R17	EB 7525	RESISTOR, 7.5 K Ohm, ½W, 5%	1	Allen Bradley
R33	EB 9125	RESISTOR, 9.1 K Ohm, ½W, 5%	1	Allen Bradley
R40, 41, 43, 44, 49, 51	EB 1031	RESISTOR, 10 K Ohm, ½W, 10%	6	Allen Bradley
R36, 39	EB 1531	RESISTOR, 15 K Ohm, ½W, 10%	2	Allen Bradley
R52, 54	EB 2731	RESISTOR, 27 K Ohm, ½W, 10%	2	Allen Bradley
R14	EB 1135	RESISTOR, 11 K Ohm, ½W, 5%	1	Allen Bradley
R20	EB 1305	RESISTOR, 13 Ohm, ½W, 10%	1	Allen Bradley
R30	EB 3005	RESISTOR, 30 Ohm, ½W, 5%	1	Allen Bradley
K3	C 1417–15	CHOPPER	1	Bristol
CR1	5003–003	DIODE	1	NLS
C1	XK2–682	CAPACITOR, Polystyrene, .0068 Mfd, 200 VDCW	1	Electron
C2	XL2–222	CAPACITOR, Polystyrene, .0022 Mfd, 200 VDCW	1	Electron
R12	025–OL–1–20	POTENTIOMETER, 20 Ohm	1	Conelco
R10	025–OL–1–200	POTENTIOMETER, 200 Ohm	1	Conelco
R8	025–OL–1–2K	POTENTIOMETER, 2 K Ohm	1	Conelco
R2–7	PW1719B–15003M	RESISTOR, 1.5 Meg, ½W, .05%, Aqua	6	NLS
R9	PW1719B–89902M	RESISTOR, 899 K Ohm, ½W, .05%, Orange	1	NLS
R11	PW1719B–89901M	RESISTOR, 89.9 K Ohm, ½W, .05%, Red	1	NLS
R13	PW1719B–99910M	RESISTOR, 9.9911 K Ohm, ½W, .05%, Brown	1	NLS
R1	GB 1051	RESISTOR, 1 Meg, 1W, 10%	1	Allen Bradley
K1, 2	5005–003	RELAY	2	NLS

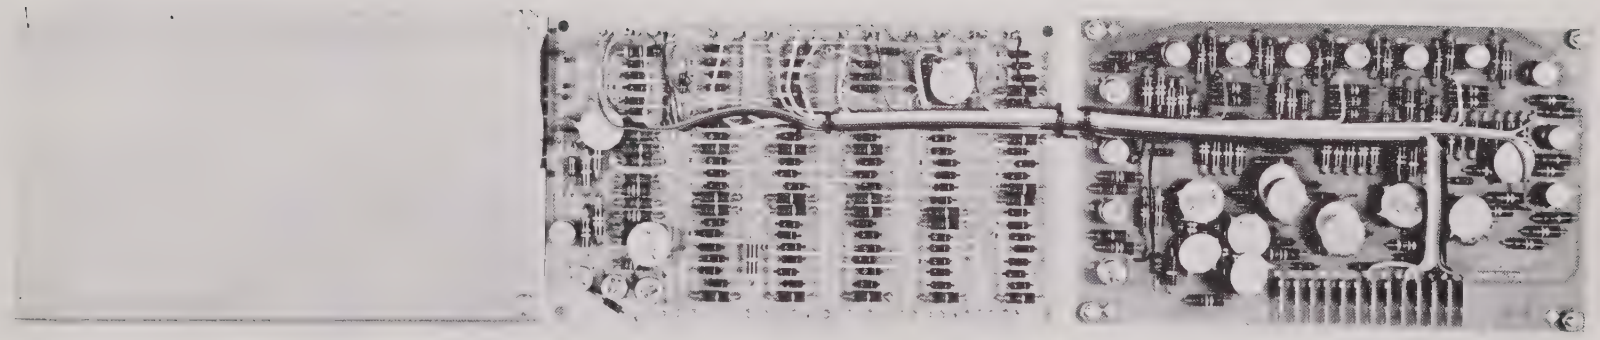

Figure 37. Programmer Assembly, Open View—Front (see Figures 39, 40, and 41 for parts identification).

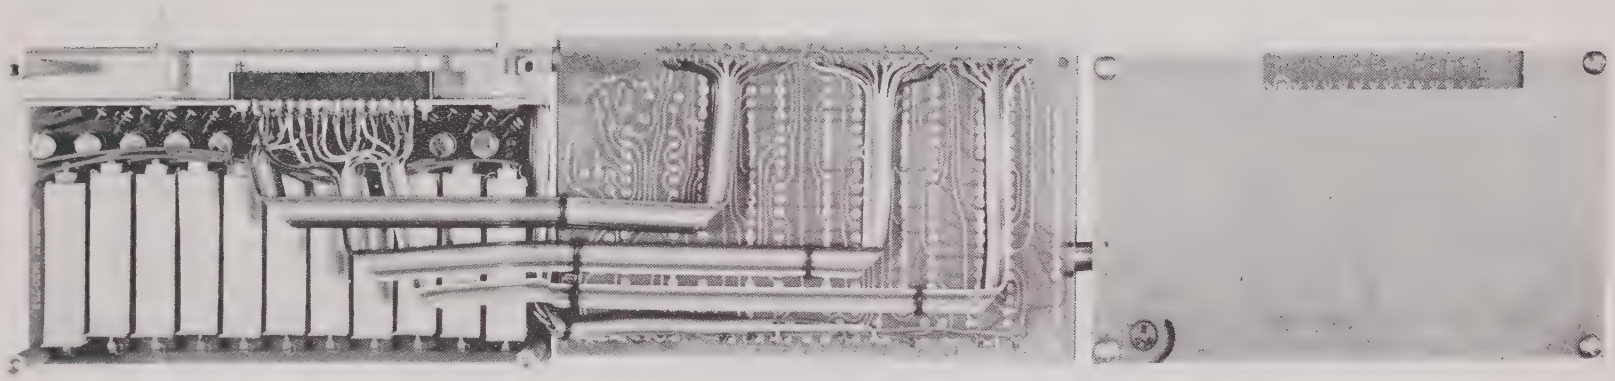

Figure 38. Programmer, Assembly, Open View—Rear.

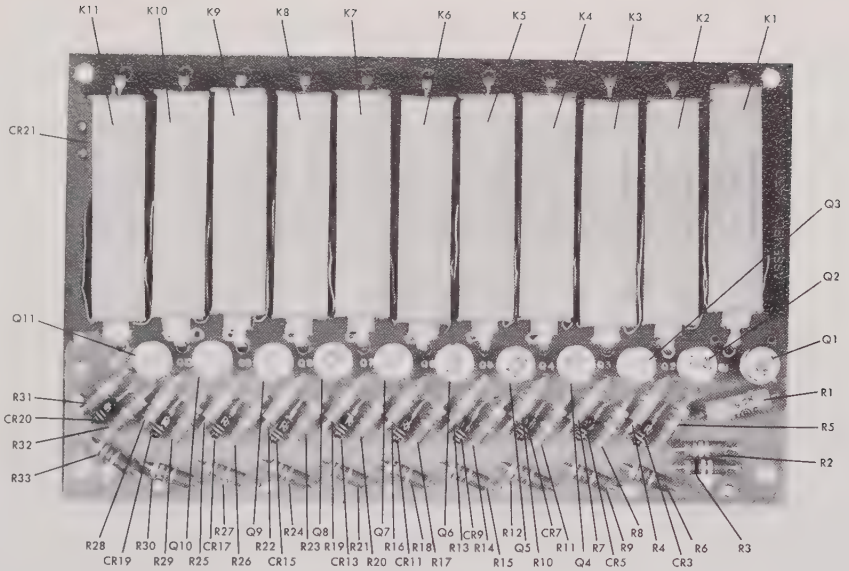

11430–733 BOARD ASSEMBLY RELAY

Figure 39. Programmer, Relay Board (harness removed).

CIRCUIT REFERENCE	PART NUMBER	DESCRIPTION	QTY PER UNIT	MANUFACTURER
R34	EB1021	RESISTOR, 1K, ½W, 10%	1	Allen Bradley
R1	DCM¼	RESISTOR, 49.9K, ¼W, 1%	1	Electra
R2, 4, 7, 10, 13, 16, 19, 22, 25, 28, 31	EB2731	RESISTOR, 27K, ½W, 10%	11	Allen Bradley
R3	EB1031	RESISTOR, 10K, ½W, 10%	1	Allen Bradley
R5, 6, 8, 9, 11, 12, 14, 15, 17, 18, 20, 21, 23, 24, 26, 27, 29, 30, 32, 33	EB4721	RESISTOR, 4.7K, ½W, 10%	20	Allen Bradley
CR1–21	5003–002	DIODE	21	NLS
Q1–11	2N1374	TRANSISTOR	11	T.I.
K1	CRZ1061	RELAY, Reed	1	C. P. Clare
K2–11	RP12450–G2	RELAY, Reed	10	C. P. Clare

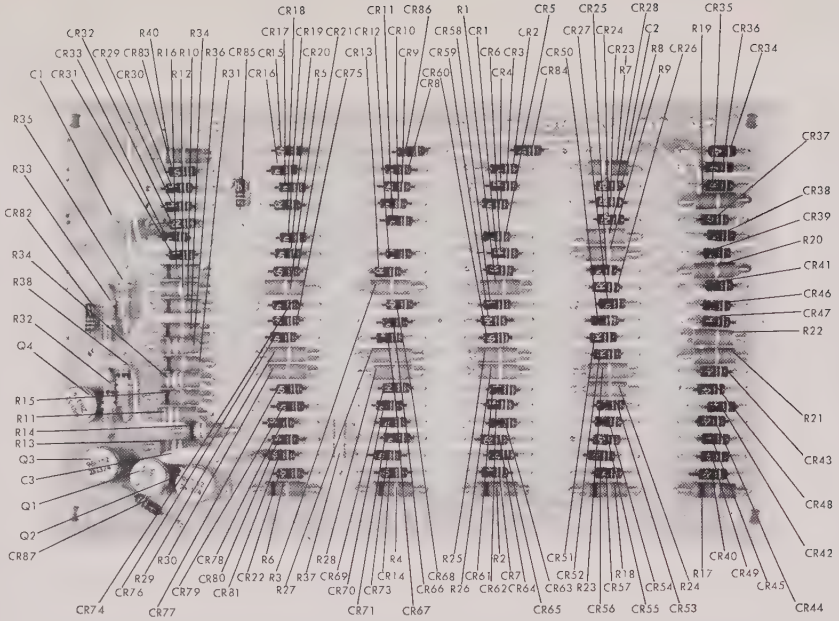

11430–734 MATRIX BOARD

Figure 40. Programmer, Matrix Board (harness removed).

CIRCUIT REFERENCE	PART NUMBER	DESCRIPTION	QTY PER UNIT	MANUFACTURER
C1–C3	BT.02	CAPACITOR, .02 Mfd., ± 20%	3	R.M.C.
R7	EB2241	RESISTOR, 220K, ½ W, 10%	1	Allen Bradley
R11, 13, 34, 36	EB2731	RESISTOR, 27K, ½ W, 10%	4	Allen Bradley
R14, 32, 38	EB1031	RESISTOR, 10K, ½ W, 10%	3	Allen Bradley
R33, 35, 40	EB4721	RESISTOR, 4.7K, ½ W, 10%	3	Allen Bradley
R1, 3, 5, 8, 9, 19–30, 37, 12	EB2221	RESISTOR, 2.2K, ½ W, 10%	19	Allen Bradley
R2, 4, 6, 10, 15, 16, 17, 18, 31, 39	EB1021	RESISTOR, 1K, ½ W, 10%	10	Allen Bradley
CR1–CR87	5003–002	DIODE	87	NLS
Q1–Q4	2N1374	TRANSISTOR	4	T.I.

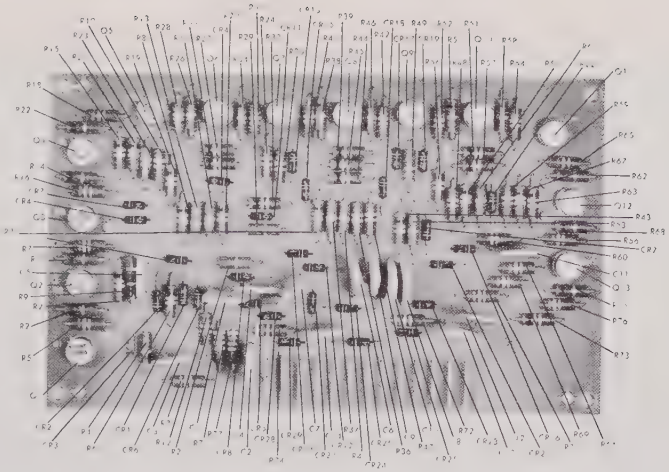

11430–731 COUNTER BOARD

Figure 41. Programmer, Counter Board (harness removed).

CIRCUIT REFERENCE	PART NUMBER	DESCRIPTION	QTY PER UNIT	MANUFACTURER
C1–C14	BT.02	CAPACITOR, .02 Mfd., ±20%	14	Radio Mat'ls. Co.
R10, 12, 23, 24, 35, 36, 47, 48, 59, 60	EB2241	RESISTOR, 220K, ½W, 10%	10	Allen Bradley
R71, 72, 77, 74	EB4731	RESISTOR, 47K, ½W, 10%	4	Allen Bradley
R3, 5, 7, 16, 18, 28, 30, 40, 42, 52, 54, 64, 65, 66, 69, 70, 76	EB2731	RESISTOR, 27K, ½W, 10%	17	Allen Bradley
R2, 6, 8, 15, 19, 20, 21, 27, 31, 32, 33, 39, 43, 44, 45, 51, 55, 56, 57, 63, 67, 73	EB1031	RESISTOR, 10K, ½W, 10%	22	Allen Bradley
R9	EB4721	RESISTOR, 4.7K, ½W, 10%	1	Allen Bradley
R4, 13, 17, 25, 29, 37, 41, 49, 53, 61	EB2221	RESISTOR, 2.2K, ½W, 10%	10	Allen Bradley
R1, 11, 14, 22, 26, 34, 38, 46, 50, 58, 62, 68, 75	EB1021	RESISTOR, 1K, ½W, 10%	13	Allen Bradley
CR3	¼M6.8Z	DIODE, Zener	1	Motorola
CR1, 2, 4–29	5003–002	DIODE	28	NLS
Q1–Q13	2N1374	TRANSISTOR	13	T.I.

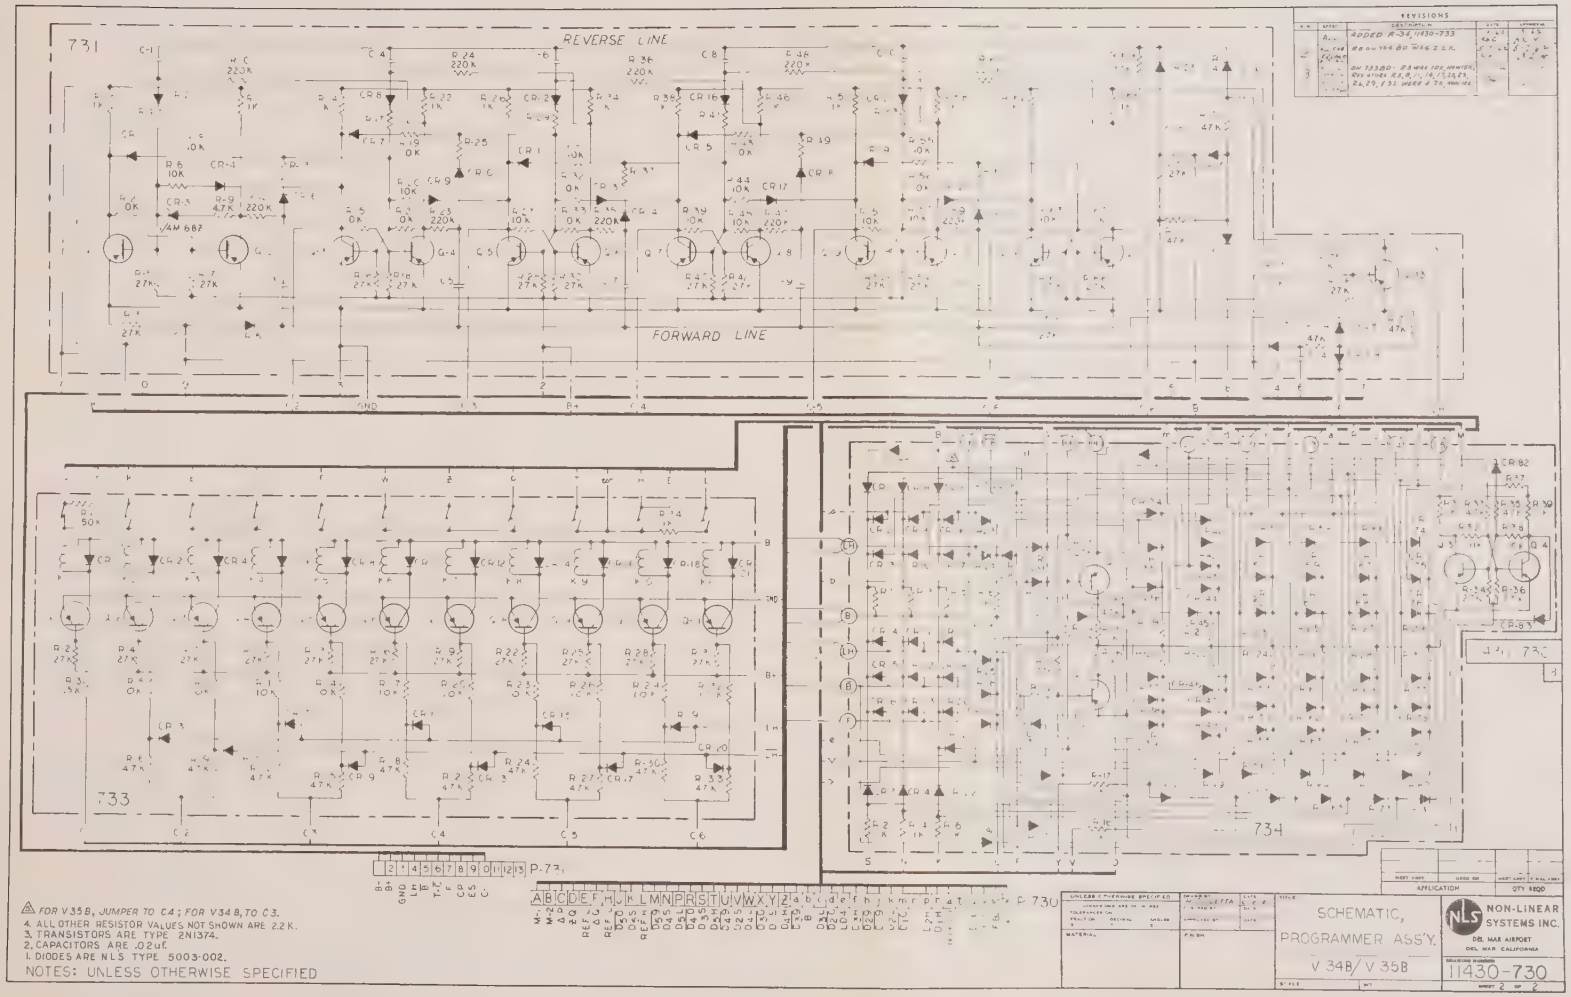

NOTES: UNLESS OTHERWISE SPECIFIED

1. ALL DIODES ARE N.L.S. TYPE 5003-002.
2. CAPACITORS ARE .02 uf.
3. TRANSISTORS ARE TYPE 2N1374.
4. ALL OTHER RESISTOR VALUES NOT SHOWN ARE 2.2 K.

⚠ FOR V35B, JUMPER TO C4; FOR V34B, TO C3.

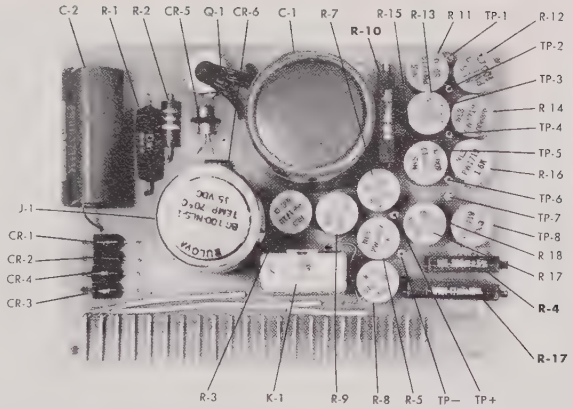

Figure 42. Zener Reference Voltage Supply Board.

CIRCUIT REFERENCE	PART NUMBER	DESCRIPTION	QTY PER UNIT	MANUFACTURER
K1	5005–003	RELAY	1	NLS
C2	05RM100	CAPACITOR, Elect., 100 Mfd., 50 VDCW	1	Ind. Cond.
C1	05RTP500	CAPACITOR, Elect., 500 Mfd., 50 VDCW	1	Ind. Cond.
R4	W5–P2–200	POTENTIOMETER, 200 Ohm, 10%	1	Atohm
R10	W101–P1–60	POTENTIOMETER, 60 Ohm, 10%	1	Atohm
R6	2420–17	POTENTIOMETER, 17 Ohm, 10%	1	Conelco
R8	PW1719	RESISTOR, 25K Ohm, ½ W, 1%	1	NLS
R18	PW1719	RESISTOR, 7K Ohm, ½ W, .05%	1	NLS
R17	PW1719	RESISTOR, 3.2K Ohm, ½ W, .05%	1	NLS
R7, R9	PW1719	RESISTOR, 3.2K Ohm, ½ W, .25%	2	NLS
R16	PW1719	RESISTOR, 1.6K Ohm, ½ W, .1%	1	NLS
R5	PW1719	RESISTOR, 1K Ohm, ½ W, .25%	1	NLS
R15	PW1719	RESISTOR, 800 Ohm, ½ W, .1%	1	NLS
R14	PW1719	RESISTOR, 400 Ohm, ½ W, .25%	1	NLS
R3	PW1719	RESISTOR, 300 Ohm, ½ W, .25%	1	NLS
R13	PW1719	RESISTOR, 200 Ohm, ½ W, .25%	1	NLS
R12	PW1719	RESISTOR, 100 Ohm, ½ W, .5%, ⅜" Leads	1	NLS
R11	PW1719	RESISTOR, 50 Ohm, ½ W, 1%	1	NLS
R2	GB56G1	RESISTOR, 5.6 Ohm, 1W, 10%	1	AB
R1	PRC 5A	RESISTOR, .6 Ohm, 5W, 1%	1	PRC
Q1	2N526	TRANSISTOR	1	G.E.
CR5	1N429	DIODE	1	Hoffman
CR1, 2, 3, 4, 6	1N2616	DIODE	5	Motorola
	11420–054	ZENER OVEN SUB-ASSY.	1	NLS

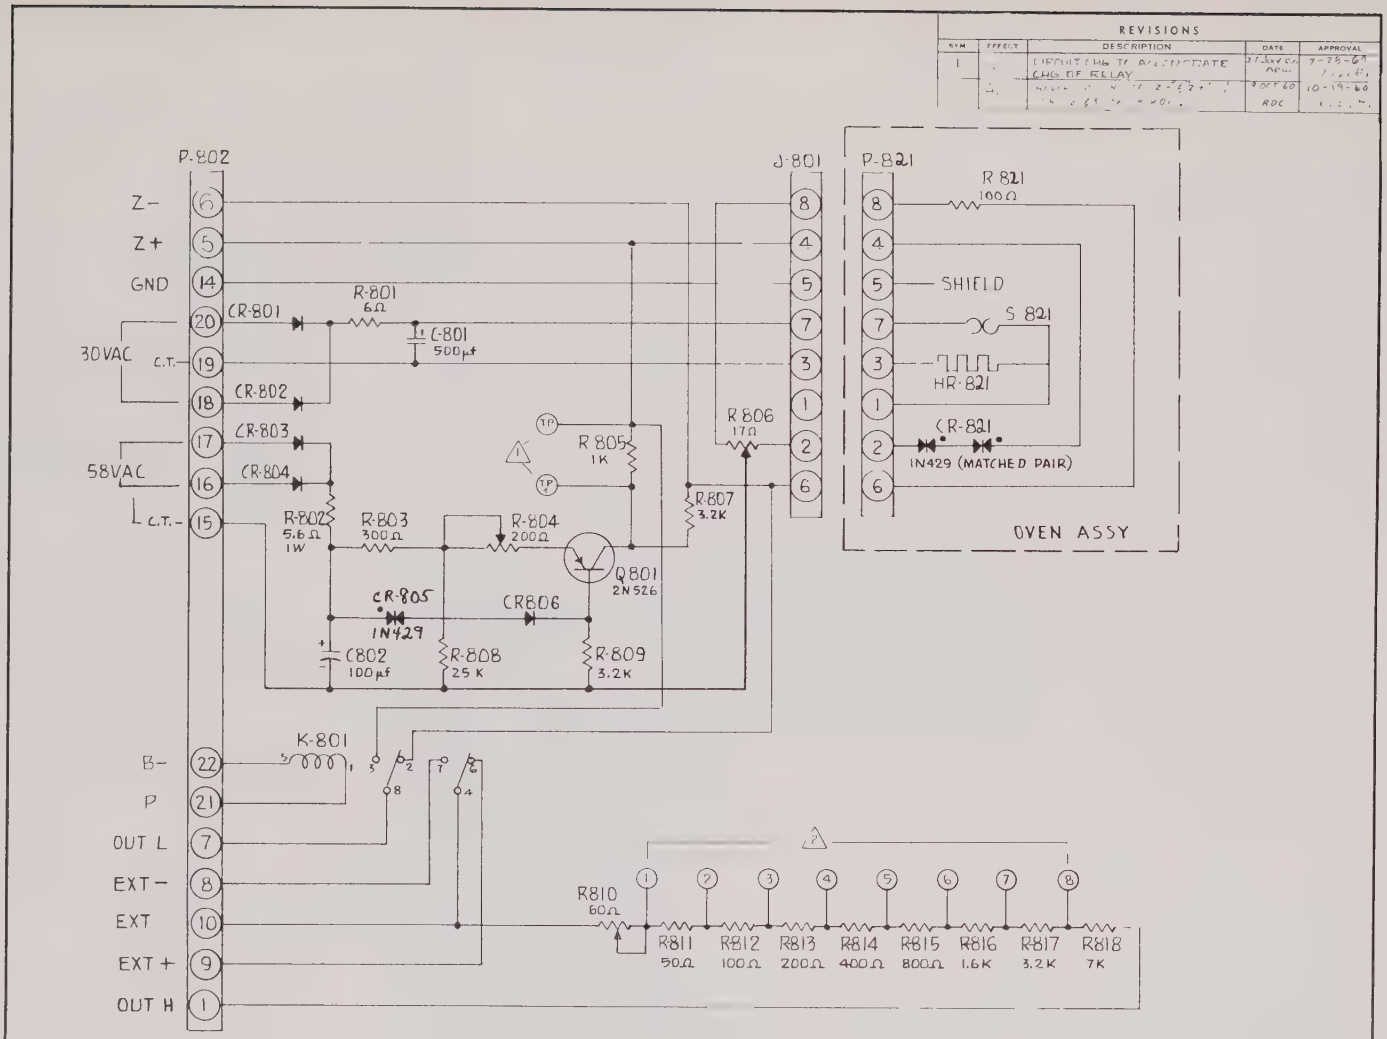

2 CERTAIN COMBINATIONS ARE SHORTED TO COMPENSATE FOR ZENER DIODE VOLTAGE (SEE MANUAL)

1 TP1 & TP2 ARE USED IN ADJUSTING THE ZENER REFERENCE

NOTES—UNLESS OTHERWISE SPECIFIED:

NEXT ASSY	USED ON	NEXT ASSY	FINAL ASSY
APPLICATION		QTY REQD	

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ON FRACTION ± DECIMAL ± ANGLES ±
MATERIAL
FINISH

DRAWN BY A. R. WALLIN DATE 1 JUNE '60
CHECKED BY DATE 6/1/60
APPROVED BY DATE

TITLE
SCHEMATIC—
ZENER SUPPLY ASSEM.
V34A V35A
DIGITAL VOLTMETER

NON-LINEAR SYSTEMS INC.
DEL MAR AIRPORT
DEL MAR, CALIFORNIA

DRAWING NUMBER 11420-050
SCALE WT. SHEET 2 OF

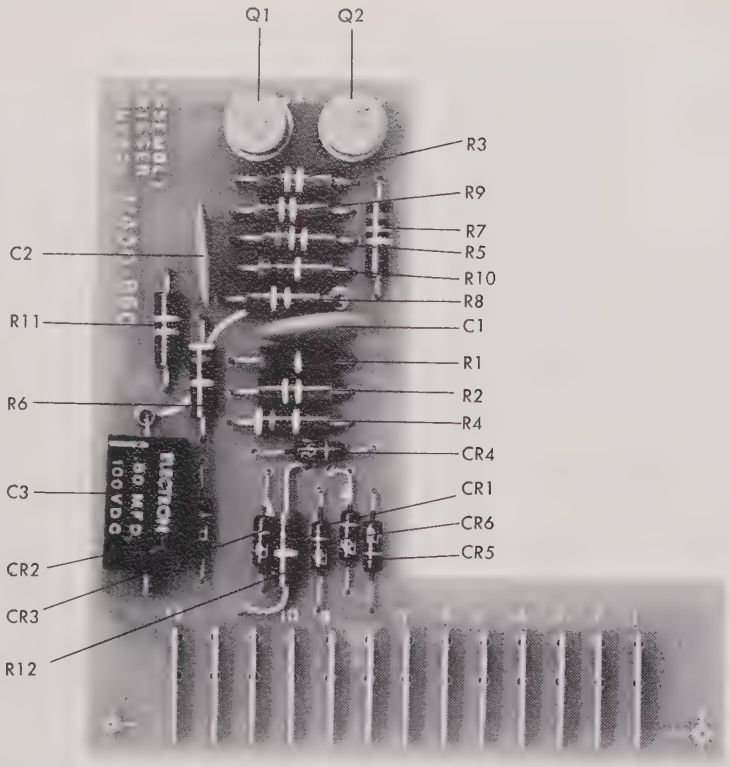

Figure 43. Trigger Control Board.

CIRCUIT REFERENCE	PART NUMBER	DESCRIPTION	QTY PER UNIT	MANUFACTURER
C3	ME1–504E	CAPACITOR, 5 Mfd., 100 VDC, Metalized Paper	1	Electron
C1, C2	BT.02	CAPACITOR, .02 Mfd., ± 20%	2	R.M.C.
R2, R8, R11	EB2241	RESISTOR, 220K, ½ W, 10%	3	Allen Bradley
R5, R7	EB2731	RESISTOR, 27K, ½ W, 10%	2	Allen Bradley
R3, R9	EB1031	RESISTOR, 10K, ½ W, 10%	2	Allen Bradley
R4, R6	EB4721	RESISTOR, 4.7K, ½ W, 10%	2	Allen Bradley
R1, R10, R12	EB1021	RESISTOR, 1K, ½ W, 10%	3	Allen Bradley
CR1-CR6	5003–002	DIODE	6	NLS
Q1, Q2	2N1374	TRANSISTOR	2	T.I.

11430-860 SHEET 2 | 1

REVISIONS				
SYM.	EFFECT.	DESCRIPTION	DATE	APPROVAL
1	ALL	ADDED R-12	1-10-62	R.L.H.

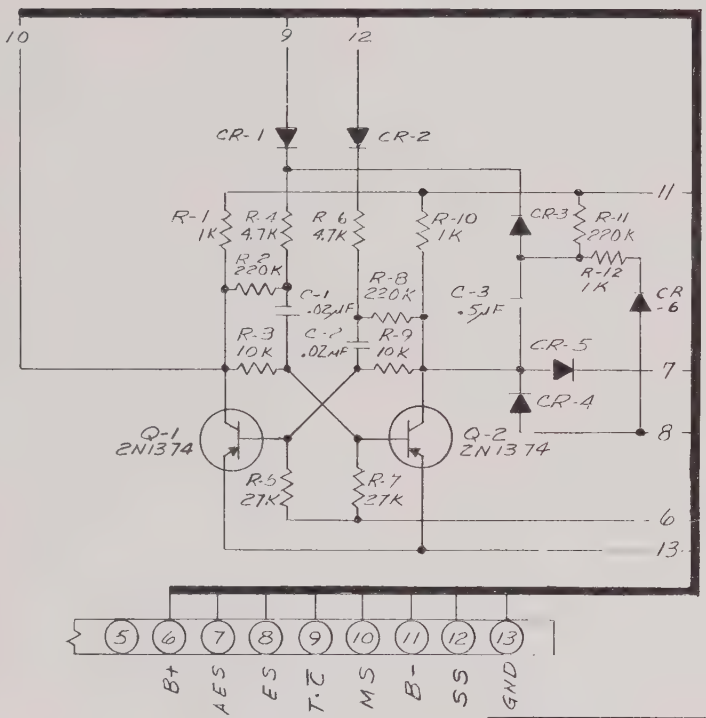

NEXT ASSY	USED ON	NEXT ASSY	FINAL ASSY
APPLICATION		QTY REQD	

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ON
FRACTION ± DECIMAL ± ANGLES ±

MATERIAL

FINISH

DRAWN BY	R. Colletta	DATE 8-7-61
CHECKED BY	R. Collier	DATE 7-7-61
APPROVED BY	R. Abrahamson	DATE 7-7-61

TITLE
SCHEMATIC - TRIGGER CONTROL BOARD

MODELS V34B/V35B

SCALE | WT.

NON-LINEAR SYSTEMS INC.
DEL MAR AIRPORT
DEL MAR, CALIFORNIA

DRAWING NUMBER 11430-860

SHEET 2 OF 2

1. DIODES ARE NLS TYPE 5003-002.
NOTES: UNLESS OTHERWISE SPECIFIED

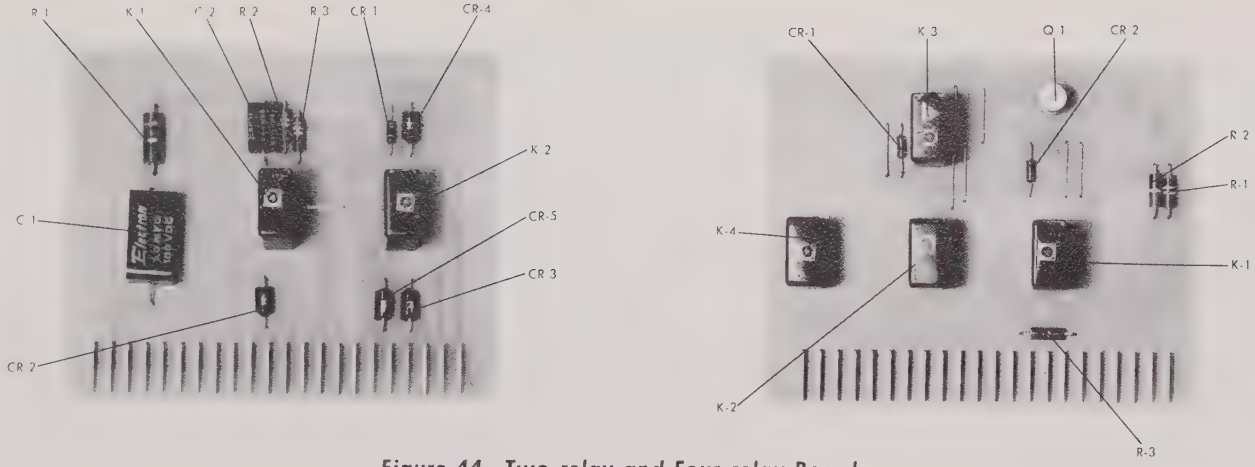

Figure 44. Two-relay and Four-relay Boards.

11420–830 ASSEMBLY, 2-RELAY

CIRCUIT REFERENCE	PART NUMBER	DESCRIPTION	QTY PER UNIT	MANUFACTURER
K1, K2	5005–002	RELAY	2	NLS
R2, R3	EB2731	RESISTOR, 27K, ½ W, 10%	1	Allen Bradley
R1	GB5125	RESISTOR, 5.1 K, 1W, 5%	1	Allen Bradley
C1	ME1–105	CAPACITOR, Metalized Paper, 1 Mfd., 100 VDC	1	Electron
C2	ME2–473E	CAPACITOR, Metalized Paper, .047 Mfd., 200 VDC	1	Electron
CR2-CR5	1N2616	DIODE	4	Motorola
CR1	5003–002	DIODE	1	NLS

11420–800 4-RELAY BOARD

CIRCUIT REFERENCE	PART NUMBER	DESCRIPTION	QTY PER UNIT	MANUFACTURER
K1–K4	5005–002	RELAY	4	NLS
R1	EB1031	RESISTOR, 10K, ½ W, 10%	1	Allen Bradley
R2	EB2221	RESISTOR, 2.2K, ½ W, 10%	1	Allen Bradley
R3	EB1021	RESISTOR, 1K, ½ W, 10%	1	Allen Bradley
CR1, CR2	5003–002	DIODE	2	NLS
Q1	2N1374	TRANSISTOR	1	T.I.

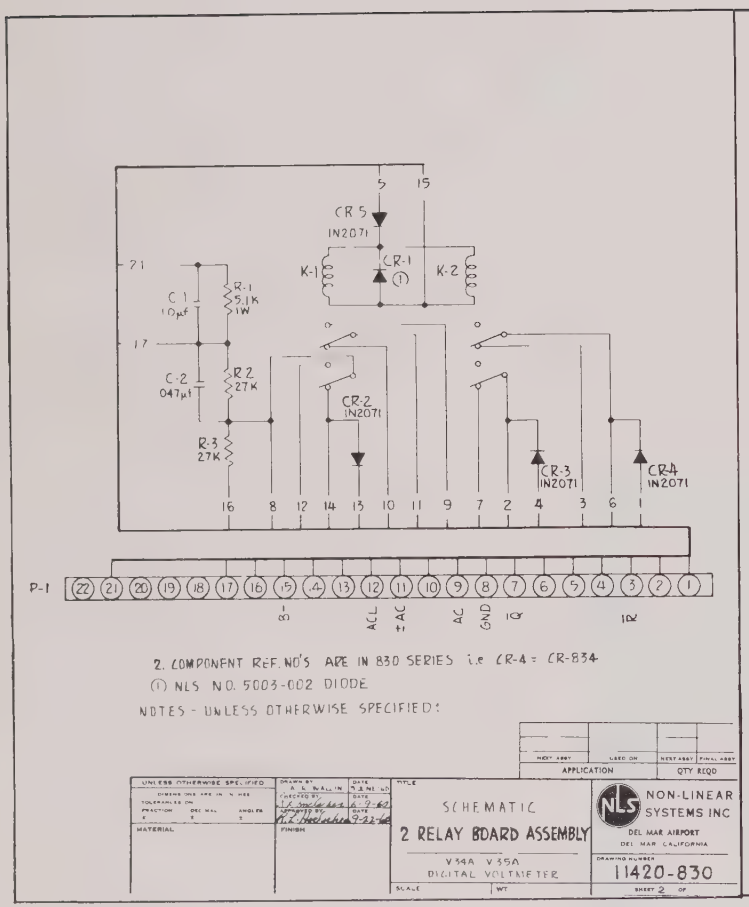

2. COMPONENT REF. NO'S ARE IN 830 SERIES i.e CR-4 = CR-834

(1) NLS NO. 5003-002 DIODE

NOTES - UNLESS OTHERWISE SPECIFIED:

NEXT ASSY	USED ON	NEXT ASSY	FINAL ASSY
APPLICATION		QTY REQD	

UNLESS OTHERWISE SPECIFIED	DRAWN BY	DATE
DIMENSIONS ARE IN INCHES	J.L. WALLIN	9 JUNE 60
TOLERANCES ON	CHECKED BY	DATE
FRACTION DECIMAL ANGLES	J.L. Wallin	6-7-60
MATERIAL	APPROVED BY	DATE
	N.L. Hollenbeck	9-22-60
	FINISH	

TITLE: SCHEMATIC
2 RELAY BOARD ASSEMBLY
V34A V35A
DIGITAL VOLTMETER

NON-LINEAR SYSTEMS INC
DEL MAR AIRPORT
DEL MAR, CALIFORNIA

DRAWING NUMBER: 11420-830

SCALE | WT | SHEET 2 OF

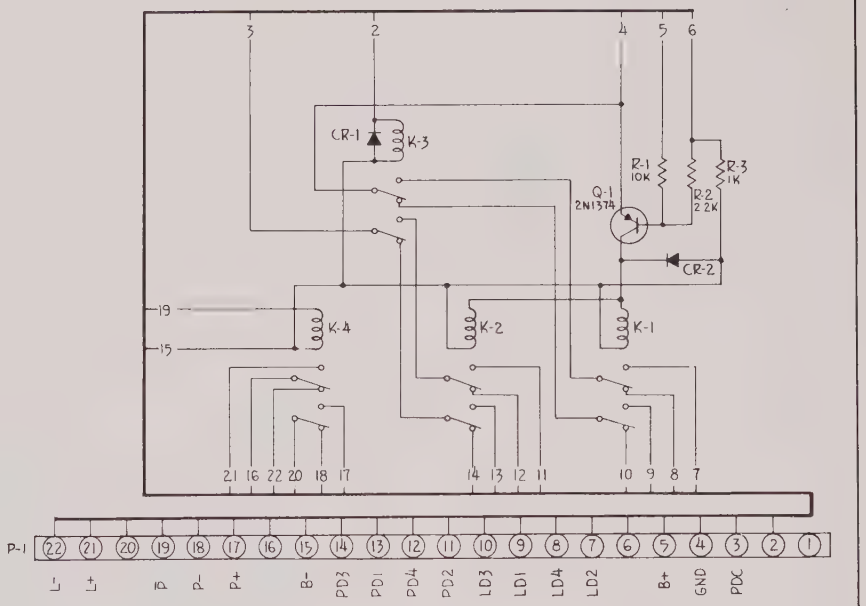

2. COMPONENT REF NO'S ARE IN 800 SERIES - i.e. R-3 = R-803

1. DIODES ARE NLS NO 5003-002

NOTES - UNLESS OTHERWISE SPECIFIED:

NEXT ASSY	USED ON	NEXT ASSY	FINAL ASSY
APPLICATION		QTY REQD	

UNLESS OTHERWISE SPECIFIED	DRAWN BY	DATE
DIMENSIONS ARE IN INCHES	A.B. WALLIN	9 JUNE 60
TOLERANCES ON	CHECKED BY	DATE
FRACTION DECIMAL ANGLES	N.L. Hollenbeck	6-7-60
MATERIAL	APPROVED BY	DATE
	N.L. Hollenbeck	9-22-60
	FINISH	

TITLE: SCHEMATIC -
4 RELAY BOARD ASSEMBLY
V34A V35A
DIGITAL VOLTMETER

NON-LINEAR SYSTEMS INC
DEL MAR AIRPORT
DEL MAR, CALIFORNIA

DRAWING NUMBER: 11420-800

SCALE | WT | SHEET 2 OF

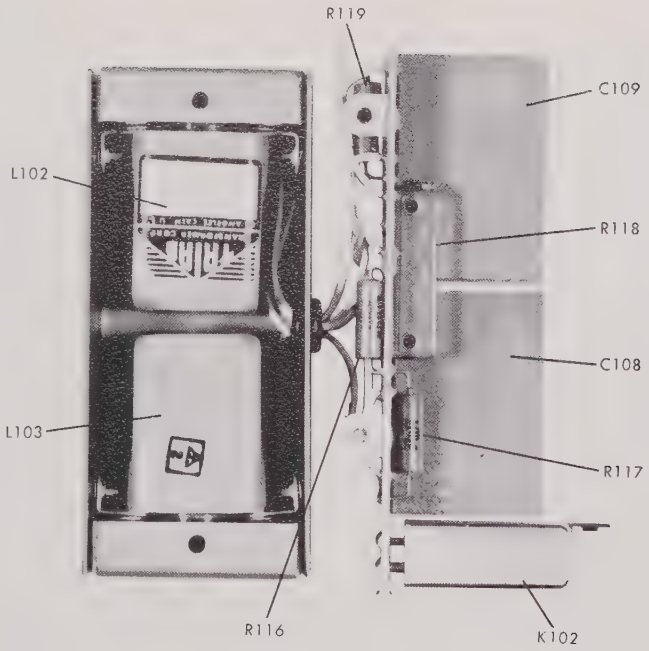

Figure 45. Input Filter.

11430–150 FILTER ASSEMBLY

CIRCUIT REFERENCE	PART NUMBER	DESCRIPTION	QTY PER UNIT	MANUFACTURER
K102	5005–003	RELAY	1	Babcock
L102–3	15594	CHOKE	2	Triad
C108–9	ZDP–1816	CAPACITOR, 1 Mfd., 1 KV	2	Elpac
R116	MDB	RESISTOR, 27.4K, ¼ W DC	1	IRC
R117	MDB	RESISTOR, 12.7K, ¼ W DC	1	IRC
R119	MDB	RESISTOR, 10K, ¼ W DC	1	IRC
R118	275–202	POTENTIOMETER, 2K	1	Bourns

SEE SCHEMATIC 11530-100

ON PAGE 55

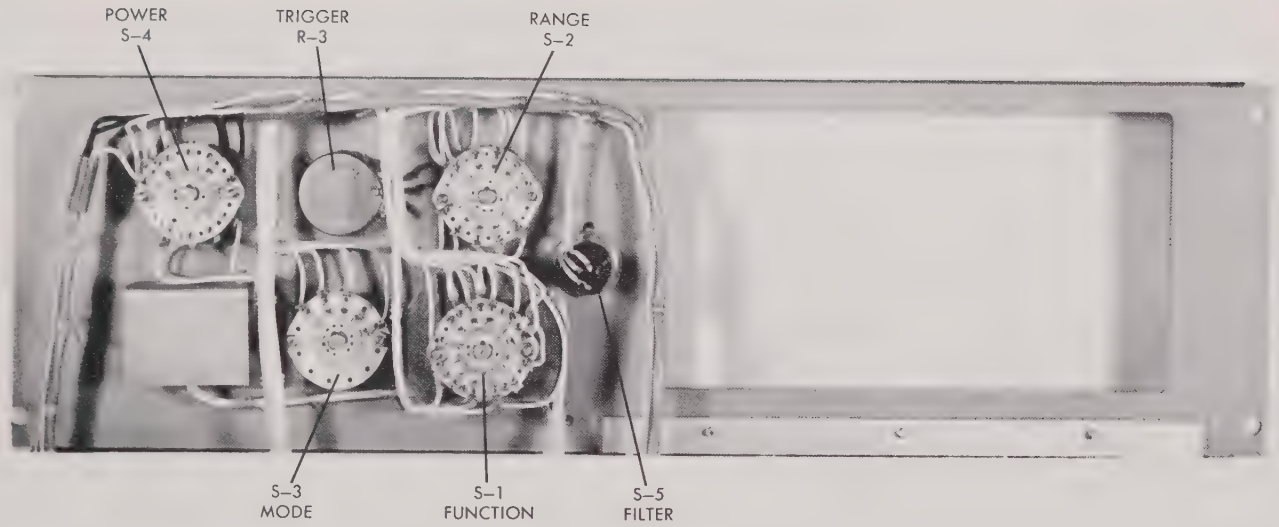

11530–100 FACADE, MAIN BOARD ASSEMBLY; SEE ALSO PAGE 58.

CIRCUIT REFERENCE	PART NUMBER	DESCRIPTION	QTY PER UNIT	MANUFACTURER
R3	11420–111	POTENTIOMETER, Trigger Level	1	NLS
S1	11420–122	SWITCH, Function	1	NLS
S2	11420–123	SWITCH, Range	1	NLS
S3	11420–121	SWITCH, Mode	1	NLS
S4	11420–120	SWITCH, Power.	1	NLS
S5	WC 1868	SWITCH, Input Filter	1	NLS

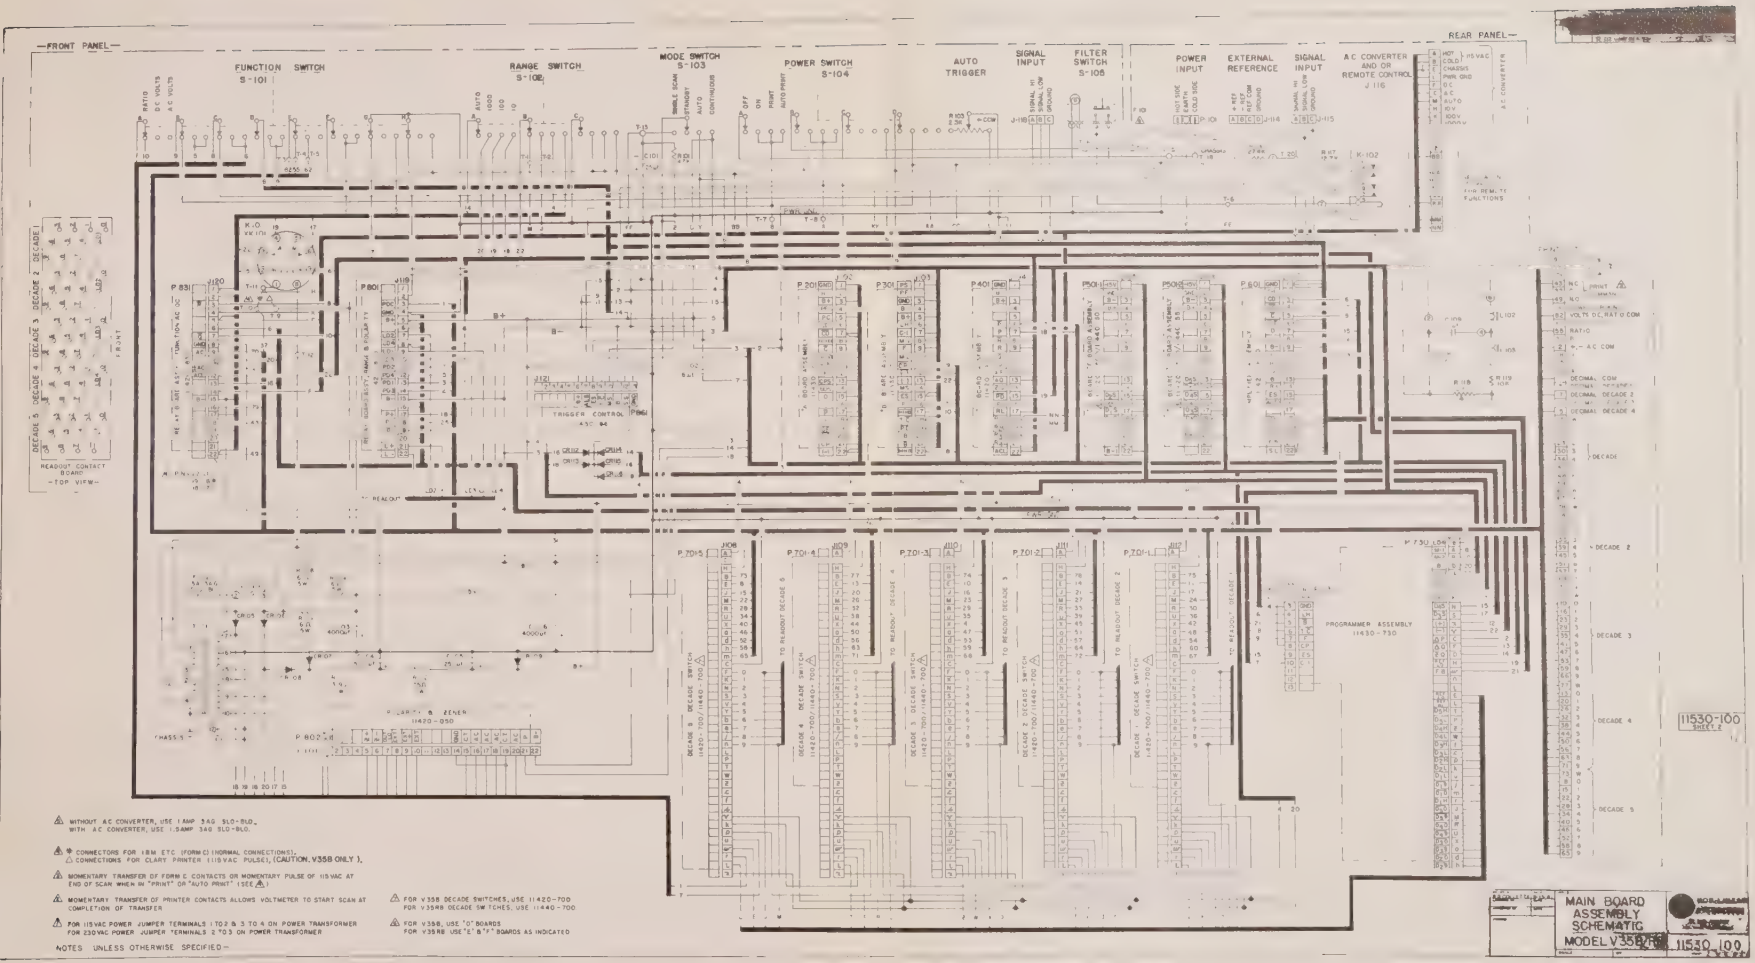

⚠ WITHOUT A C CONVERTER, USE 1 AMP 3 AG SLO-BLO.
WITH A C CONVERTER, USE 1.5 AMP 3 AG SLO-BLO.

⚠ CONNECTORS FOR IBM ETC. (FORM C) (NORMAL CONNECTIONS).
△ CONNECTIONS FOR CLARY PRINTER (115 VAC PULSE), (CAUTION. V35B ONLY).

⚠ MOMENTARY TRANSFER OF FORM C CONTACTS OR MOMENTARY PULSE OF 115 VAC AT END OF SCAN WHEN IN "PRINT" OR "AUTO PRINT" (SEE ⚠)

⚠ MOMENTARY TRANSFER OF PRINTER CONTACTS ALLOWS VOLTMETER TO START SCAN AT COMPLETION OF TRANSFER

⚠ FOR 115 VAC POWER JUMPER TERMINALS 1 TO 2 & 3 TO 4 ON POWER TRANSFORMER
FOR 230 VAC POWER JUMPER TERMINALS 2 TO 3 ON POWER TRANSFORMER

⚠ FOR V35B DECADE SWITCHES, USE 11420-700
FOR V35RB DECADE SWITCHES, USE 11440-700

⚠ FOR V35B, USE "D" BOARDS
FOR V35RB USE "E" & "F" BOARDS AS INDICATED

NOTES UNLESS OTHERWISE SPECIFIED—

MAIN BOARD ASSEMBLY SCHEMATIC
MODEL V35B/R
11530-100

11530–100 MAIN BOARD; SEE ALSO PAGE 54.

CIRCUIT REFERENCE	PART NUMBER	DESCRIPTION	QTY PER UNIT	MANUFACTURER
L101	11400–108	CHOKE	1	NLS
T101	11420–109	TRANSFORMER, Power	1	NLS
CR109	3/4M8.2Z5	DIODE, Zener ¾ W	1	Motorola
CR107, CR108	1N2616	RECTIFIER	2	Motorola
CR105, CR106	1N1124R	RECTIFIER	2	T.I.
CR112, CR116	5003–002	DIODE	5	NLS
R101	EB4721	RESISTOR, 4.7K, ½ W, 10%	1	Allen Bradley
R108, R109, R110		RESISTOR, .6 Ohm, 5W, 1%	3	P.R.C.
R111	GB39G1	RESISTOR, 3.9 Ohm, 1W, 10%	1	Allen Bradley
R112	GB9101	RESISTOR, 75 Ohm, 2W, 10%	1	Allen Bradley
C107	ME2–105	CAPACITOR, 1 Mfd., 200 VDCW	1	Electron
C102	5002–002	CAPACITOR	1	NLS
C101	52RM25	CAPACITOR, 25 Mfd., 25 VDCW	1	Ind. Cond.
C103, C106	1B1246A	CAPACITOR, 4000 Mfd., 25 VDCW	2	Ind. Cond.
C104, C105	1B1249	CAPACITOR, 3X250 Mfd., 50 VDCW	1	Ind. Cond.
K101	KRP–11D	RELAY	1	P.B.

REVISIONS				
DTR	EFFECT	DESCRIPTION	DATE	APPROVAL

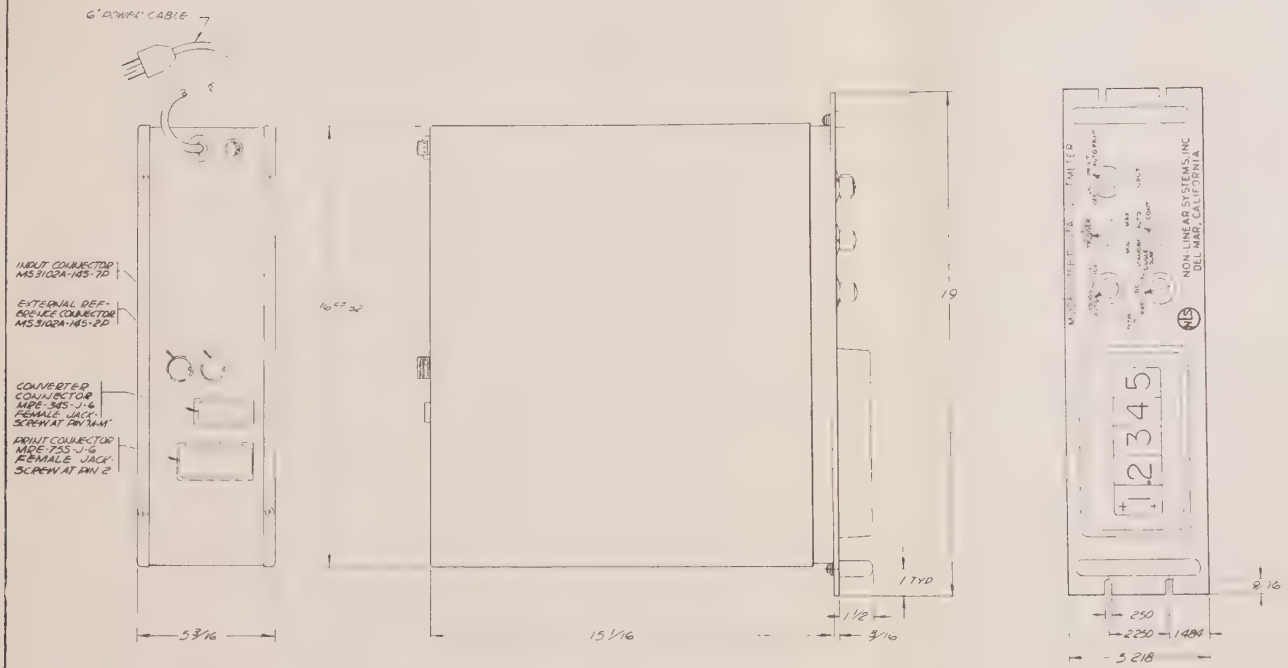

INPUT
SELECTABLE
STRUCTURE FABRICATED FROM ALUMINUM ALLOY
PRINTED CIRCUIT BOARDS MADE FROM COPPER CLAD EPOXY
READOUT WINDOWS MADE FROM PLEXIGLASS
FRONT PANEL PAINTED LIGHT GRAY PER MIL-E-15090B, TYPE I CLASS I
CABINET
ELECTRICAL
DIGITS SCALED
VOLTAGE RANGE
INPUT IMPEDANCE: 10 MEGOHMS, AT BALANCE.
INTERNAL REFERENCE VOLTAGE: TEMPERATURE CONTROLLED ZENER
ACCURACY: 0.01% FOR ENDING OF 9 DIGIT

RESOLUTION: 1 DIGIT
EXTERNAL REFERENCE VOLTAGE ±10 TO ±100 VDC
EXTERNAL REFERENCE INPUT IMPEDANCE: 50,000 OHMS
PRIMARY POWER: 115/230 VOLTS ±10%, 50-60 CPS
APPROXIMATELY 30 VOLT-AMPS

FEATURES
INDIVIDUAL PLUG-IN OIL BATH STEPPING SWITCHES.
COMPLETELY TRANSISTORIZED.
BALANCING TIME MAXIMUM: 2.36 SECONDS

SNAP IN READOUT

CONNECTIONS
SIGNAL INPUT CONNECTOR:
A - INPUT
B - INPUT COMMON
C - CHASSIS GROUND
EXTERNAL REFERENCE CONNECTOR
A - + REFERENCE
B - - REFERENCE
C - REFERENCE COMMON
D - CHASSIS GROUND

NEXT ASSY	USED ON	NEXT ASSY	FINAL ASSY
APPLICATION		QTY REQD	

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ON
FRACT ± DECIMALS ANGLES
2 PLACE ± .02 °
MATERIAL
FINISH

DRAWN BY G. WALKER DATE 9 8 61
CHECKED BY DATE
APPD BY DATE 9/12/61

TITLE
DIGITAL VOLTMETER
MODEL V35B
OUTLINE DRAWING

SCALE 1/2 SIZE

NON-LINEAR SYSTEMS INC.
DEL MAR AIRPORT
DEL MAR, CALIFORNIA

DRAWING NUMBER
11530
SHEET 3 OF 3

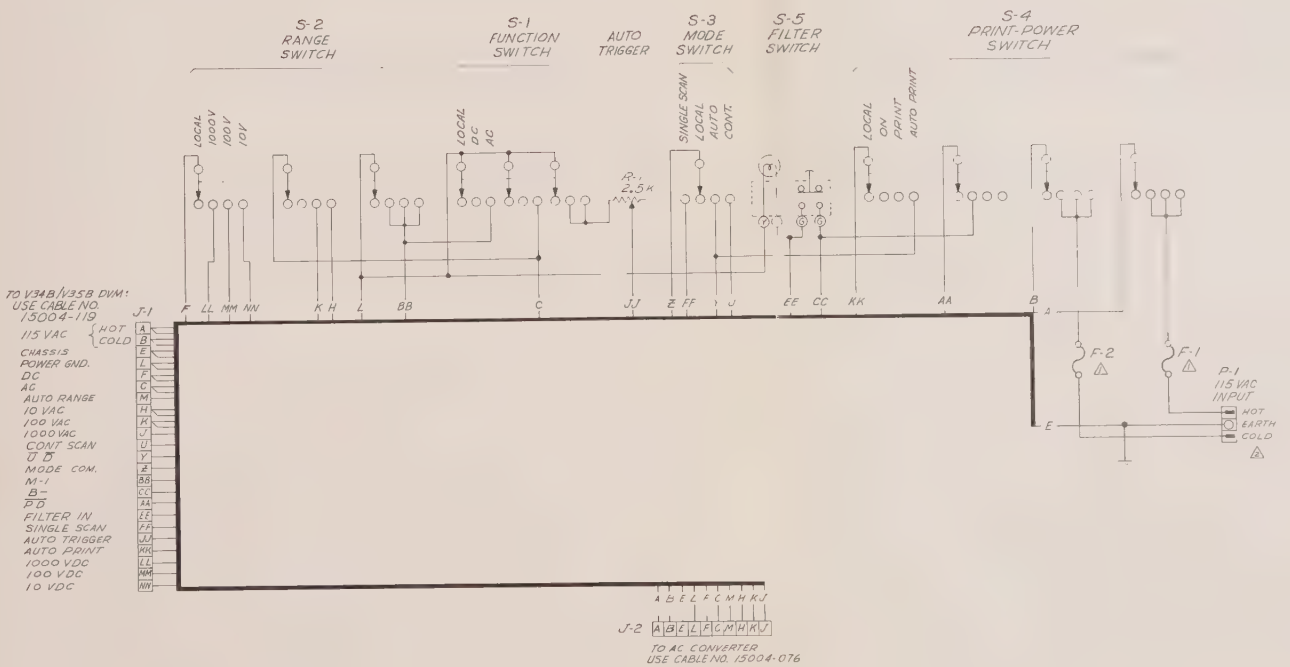

6. THIS UNIT IS AN ACCESSORY, NOT A PART OF THE V34B/V35B; THIS DWG. IS INCLUDED WITH THE V34B/V35B DWGS. FOR REF. ONLY.
5. REMOTE CONTROL OF THE RATIO FUNCTION IS NOT AVAILABLE.
4. FOR REMOTE CONTROL THE DVM, SWITCHES MUST BE SET AS FOLLOWS: FUNCTION TO "DC," MODE TO "STANDBY," AUTO TRIGGER TO "MAX." RANGE TO "AUTO," POWER TO "OFF," & FILTER "OUT."
3. FOR LOCAL CONTROL AT THE DVM, S-1 THRU S-4 MUST BE SET TO LOCAL & FILTER "OUT."
2. PLUG POLARIZATION **MUST** BE OBSERVED.
1. FOR REMOTE CONTROL OF V34B/V35B, USE 3AG 1A SLO-BLO FUSE; FOR REMOTE CONTROL OF V34B/V35B AND THE 125C OR 125E CONVERTER, USE 3AG 1¼A SLO-BLO FUSE.

NOTES - UNLESS OTHERWISE SPECIFIED:

REVISIONS

15094 SH 2

	11530	
	11430	
NEXT ASSY	USED ON	NEXT ASSY / FINAL ASSY
APPLICATION		QTY REQD

UNLESS OTHERWISE SPECIFIED	DRAWN BY / DATE
MATERIAL	APPROVED BY / DATE
FINISH	
SCALE	WT

TITLE: SCHEMATIC, REMOTE CONTROL
V34B/V35B

NLS NON-LINEAR SYSTEMS INC
DEL MAR AIRPORT
DEL MAR, CALIFORNIA

DRAWING NUMBER 15094
SHEET 2 OF

REVISIONS				
SYM	EFFE T	DESCRIPTION	DATE	APPROVAL

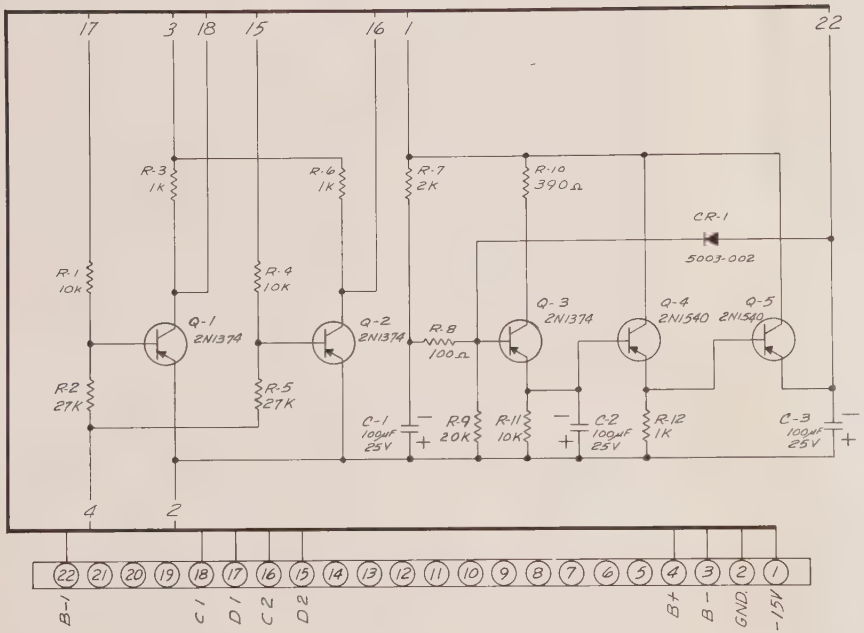

11440-500
SHEET 2

NEXT ASSY	USED ON	NEXT ASSY	FINAL ASSY
APPLICATION		QTY REQD	

UNLESS OTHERWISE SPECIFIED	DRAWN BY	DATE
DIMENSIONS ARE IN INCHES	R COLLETTA	2-9-62
TOLERANCES ON FRACTION ± DECIMAL ± ANGLES ±	CHECKED BY	DATE
	APPROVED BY	DATE
MATERIAL	FINISH	

TITLE
SCHEMATIC
"E" BOARD

V34RB / V35RB

SCALE | WT

NLS NON-LINEAR SYSTEMS INC.
DEL MAR AIRPORT
DEL MAR CALIFORNIA

DRAWING NUMBER 11440-500

SHEET 2 OF

REVISIONS				
SYM	EFFECT	DESCRIPTION	DATE	APPROVAL

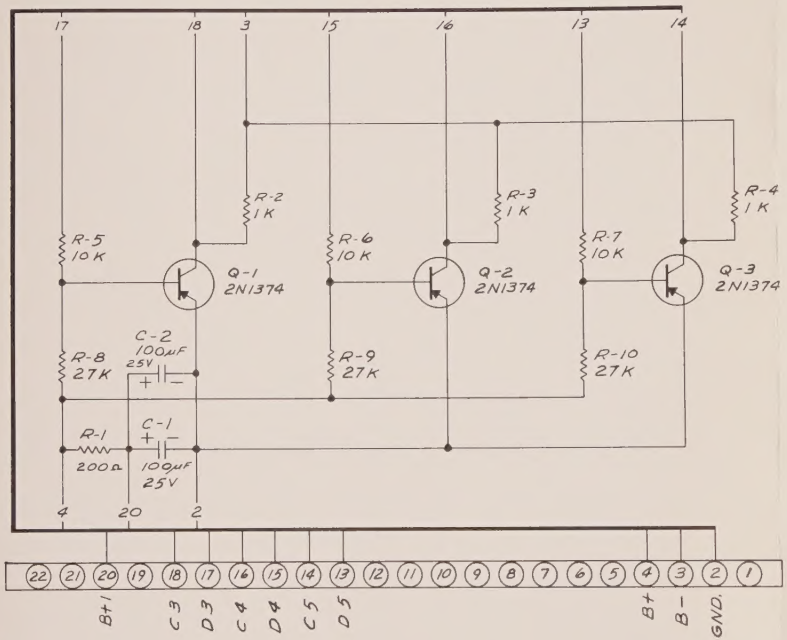

11440-550
SHEET 2

NEXT ASSY	USED ON	NEXT ASSY	FINAL ASSY
APPLICATION		QTY REQD	

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ON
FRACTION ± DECIMAL ± ANGLES ±
MATERIAL
FINISH

DRAWN BY R. COLLETTA DATE 2-9-62
CHECKED BY DATE
APPROVED BY DATE

TITLE
SCHEMATIC
"F" BOARD
V34RB/V35RB
SCALE WT.

NLS NON-LINEAR SYSTEMS INC.
DEL MAR AIRPORT
DEL MAR, CALIFORNIA
DRAWING NUMBER 11440-550
SHEET 2 OF

DIGITAL VOLTMETERS

most complete line... by purpose... by price

As originator of the DVM and leading manufacturer of precision digital measuring instruments, Non-Linear Systems, Inc., offers you the world's most complete line of DC and AC digital voltmeters, digital ratiometers, digital ohmmeters, and multipurpose instruments. Look to NLS for the instrument you need in the price range you desire. Only NLS provides the benefits of dealing with a company that's been in the DVM business for more than a decade — unmatched servicing follow-through, use-proven design superiority, and uncompromising instrument quality. Contact any of the 19 NLS sales and service offices for complete engineering information on standard instruments and custom instrumentation systems.

INSTRUMENT SELECTION GUIDE

To Measure	Model	Digits	Speed, Sec./Reading	Range	Type of Digital Output	Price
Volts, Ratio and Ohms	M25	5	1.1 constant	100μv-1kv. .00001:1-99.999:1 .1Ω-1 meg.	Decimal voltages	$5,985
	M24	4	.33 constant	100μv-1kv. .0001:1-.9999:1 .1Ω-1 meg.	Decimal voltages	$5,585
Volts and Ratio	V35B	5	2.3 max.	100μv-1kv. .00001:1-.99999:1	Decimal contacts	$3,985
	V35RB	5	2.3 max.	100μv-1kv. .00001:1-.99999:1	Decimal voltages	$3,385
	484A	4	1 avg.	1mv-1kv. 00.01%-99.99%	Decimal voltages	$1,460
	RS2	4	1 avg.	1mv-1kv. 00.01%-99.99%	Internal printer	$3,635
Volts	15	4	$67x10^{-6}$ constant	100μv-100v.	B-C-D or binary volts	$4,985-$5,485
	V44	4	$5x10^{-3}$ constant	1mv-1kv.	Decimal & B-C-D volts	$6,185
	CH2	4	$1x10^{-2}$ approx.	1mv-1kv.	Decimal & B-C-D volts	$6,585
	V64B	4	0.75 avg.	1mv-9.999v. special to 1kv.	None	$885
Voltage Ratio	R65A	5	1.5 avg.	00.001%-99.999%	None	$2,135
	R65B	5	1.5 avg.	00.001%-99.999%	Decimal voltages	$2,335
Millivolts	V60	4	1.5 avg.	10μv-99.99mv.	None	$1,660
	V60A	4	1.5 avg.	10μv-99.99mv.	Decimal voltages	$1,960
Ohms Deviation	DO24	4	.33 constant	00.01%-99.99%	Decimal voltages	$5,585
Ohms	784	4	1 avg.	.1Ω-10 meg.	Decimal voltages	$1,460
Digital-Analog	16	4	$4x10^{-6}$ constant	.001v.-9.999v.		$3,085
AC, Low-Level DC, Data Logging, Go/No-Go Testing	Plug-in accessories are available for high accuracy measurement of AC and low-level DC, data logging, and go/no-go testing. Also, NLS offers a wide range of custom instrumentation for special applications.					

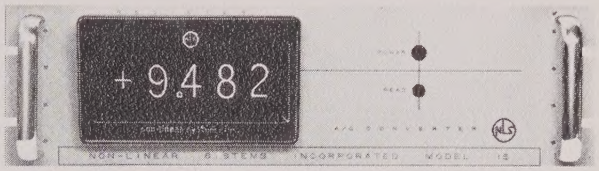

High-Speed A/D Converters

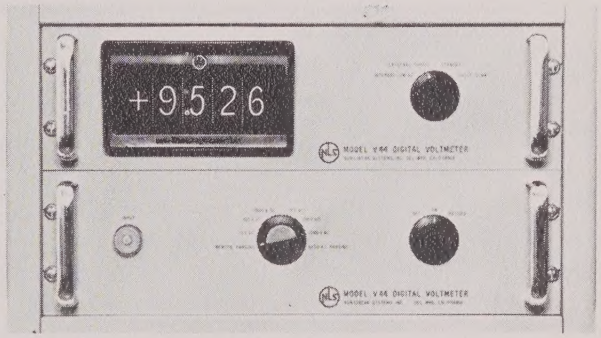

Five-Digit and 4-Digit Instruments that measure Volts, Ratio and Ohms

Five-Digit and 4-Digit medium-priced Voltmeter-Ratiometers

Low-cost Industrial DVMs and Ohmmeters

Prices and specifications are subject to change without notice. Prices F.O.B. destination U.S.A.

Accuracy is ±0.01% of reading ±1 digit except for millivoltmeters which have accuracy of ±0.1% of reading ±1 digit (precision is ±1 digit). V35B-V35RB ratio accuracy is ±0.005% of reading or ±1 digit. Input impedance is generally 10 megs for voltage measurements, 1,000 megs for ratio (10 megs on M25's two highest ratio ranges). Input impedance of Models 15 and 15B is 625 ohms/volt. Decimal digital outputs are 10 lines/decade.

Originator of the Digital Voltmeter

non-linear systems, inc.

Del Mar, California

non linear
systems, inc.

DEL MAR, CALIFORNIA

www.manualsplus.com
1022570